



NAIS

GU (General Use) Type 1-Channel (Form A) Current Limit Function 6-Pin Type

PhotoMOS RELAYS

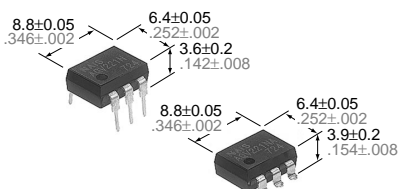

mm inch



FEATURES

1. Current Limit Function

To control an over current from flowing, the current limit function has been realized. It keeps an output current at a constant value when the current reaches a specified current limit value.

2. Enhancing the capability of surge resistance between output terminals

The current limit function controls the ON time surge current to enhance the capability of surge resistance between output terminals.

3. Reinforced insulation 5,000 V type

More than 0.4 mm internal insulation distance between inputs and outputs. Conforms to EN41003, EN60950 (reinforced insulation).

4. Compact 6-pin DIP size

The device comes in a compact (W)6.4 × (L)8.8 × (H) 3.9mm (W).252 × (L).346 × (H).154inch, 6-pin DIP size

5. Controls low-level analog signals

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

6. High sensitivity, low ON resistance

7. Low-level off state leakage current

TYPICAL APPLICATIONS

- Telephone equipment
- Modem

TYPES

| Type | I/O isolation voltage | Output rating* | | Part No. | | | | Packing quantity | |
|------------|-----------------------|----------------|--------------|-----------------------|------------------------|-----------------------------|------------|------------------|---------------|
| | | | | Through hole terminal | Surface-mount terminal | | | | |
| | | Load voltage | Load current | Tube packing style | | Tape and reel packing style | | Tube | Tape and reel |
| AC/DC type | Reinforced 5,000 V | 350 V | 130 mA | AQV210HL | AQV210HLA | AQV210HLAX | AQV210HLAZ | | |

*Indicate the peak AC and DC values.

Note: For space reasons, the package type indicator "X" and "Z" are omitted from the seal.

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQV210HL(A) | Remarks |
|-------------------------|-------------------------|-----------|---------------------------------|---|
| Input | LED forward current | I_F | 50 mA | |
| | LED reverse voltage | V_R | 3 V | |
| | Peak forward current | I_{FP} | 1 A | $f = 100 \text{ Hz}$, Duty factor = 0.1% |
| | Power dissipation | P_{in} | 75 mW | |
| Output | Load voltage (peak AC) | V_L | 350 V | |
| | Continuous load current | I_L | 0.13 A | |
| | Power dissipation | P_{out} | 500 mW | |
| Total power dissipation | | P_T | 550 mW | |
| I/O isolation voltage | | V_{iso} | 5,000 V AC | |
| Temperature limits | Operating | T_{opr} | -40°C to +85°C -40°F to +185°F | Non-condensing at low temperatures |
| | Storage | T_{stg} | -40°C to +100°C -40°F to +212°F | |

AQV210HL


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item | | Symbol | AQV210HL(A) | Condition |
|----------------------------------|---------------------------|---------------------------------------|----------------------|---|
| Input | LED operate current | Typical | 1.6 mA | $I_L = \text{Max.}$ |
| | | Maximum | 3.0 mA | |
| | LED turn off current | Minimum | 0.4 mA | $I_L = \text{Max.}$ |
| | | Typical | 1.5 mA | |
| LED dropout voltage | Minimum | 1.14 (1.25 V at $I_F = 50\text{mA}$) | $I_F = 5 \text{ mA}$ | |
| | Typical | 1.5 V | | |
| Output | On resistance | Typical | 20Ω | $I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s on time |
| | | Maximum | 25Ω | |
| | Off state leakage current | Maximum | 1μA | $I_F = 0$ $V_L = \text{Max.}$ |
| Current limit | Typical | — | 180 mA | $I_F = 5 \text{ mA}$ |
| Transfer characteristics | Turn on time* | Typical | 0.8 ms | $I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ |
| | | Maximum | 2.0 ms | |
| | Turn off time* | Typical | 0.05 ms | $I_F = 5 \text{ mA}$ $I_L = \text{Max.}$ |
| | | Maximum | 1.0 ms | |
| | I/O capacitance | Typical | — | 0.8 pF |
| Maximum | | — | 1.5 pF | |
| Initial I/O isolation resistance | Minimum | R_{iso} | 1,000 MΩ | 500 V DC |

Note: Recommendable LED forward current $I_F = 5$ to 10 mA.

For type of connection, see Page 31.

*Turn on/Turn off time

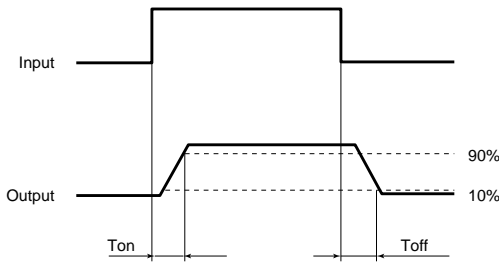


- For Dimensions, see Page 27.
- For Schematic and Wiring Diagrams, see Page 31.
- For Cautions for Use, see Page 36.

REFERENCE DATA


1. Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F

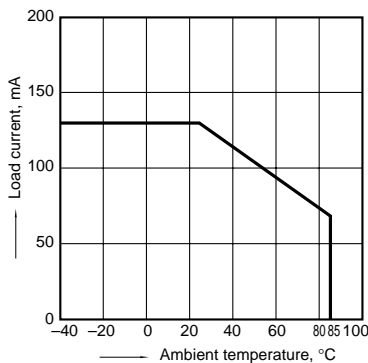


2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 4 and 6;
LED current: 5 mA; Load voltage: Max. (DC)
Continuous load current: Max. (DC)

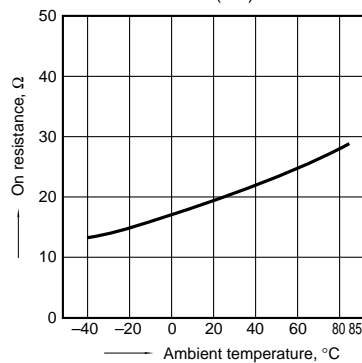


3. Turn on time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max. (DC);
Continuous load current: Max. (DC)

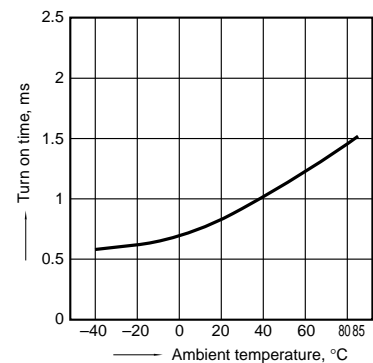


4. Turn off time vs. ambient temperature characteristics

LED current: 5 mA; Load voltage: Max.(DC); Continuous load current: Max.(DC)

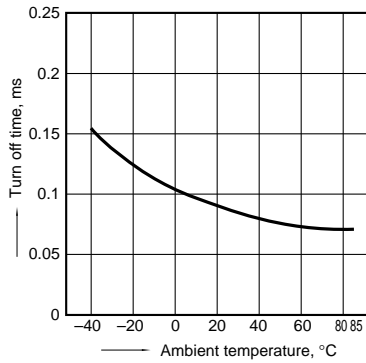


5. LED operate current vs. ambient temperature characteristics

Load voltage: Max.(DC); Continuous load current: Max.(DC)

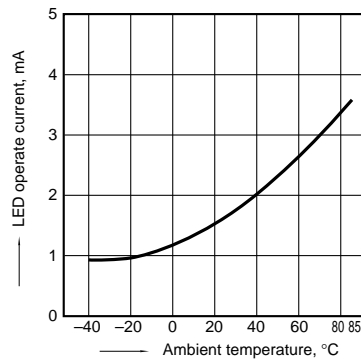


6. LED turn off current vs. ambient temperature characteristics

Load voltage: Max.(DC); Continuous load current: Max.(DC)

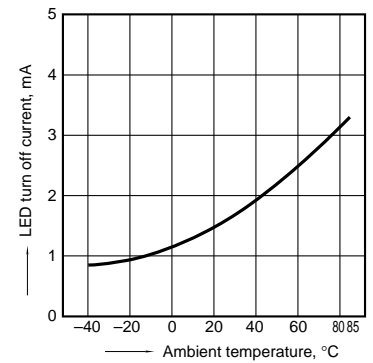


7. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

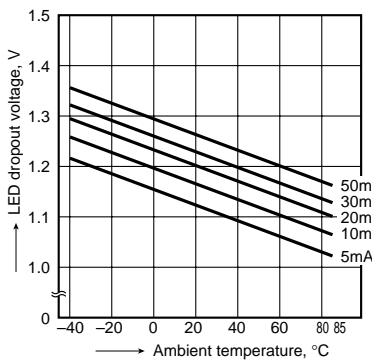


8. Voltage vs. current characteristics of output at MOS portion

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

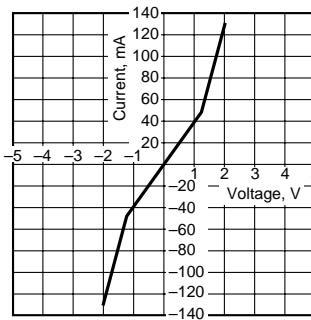


9. Off state leakage current

Measured portion: between terminals 4 and 6; Ambient temperature: 25°C 77°F

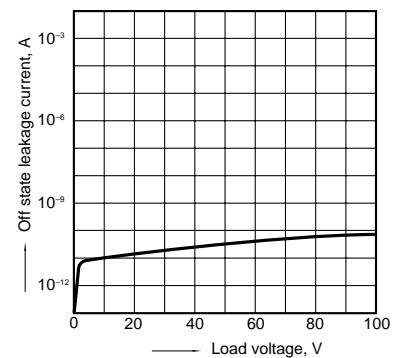


10. LED forward current vs. turn on time characteristics

Measured portion: between terminals 4 and 6; Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

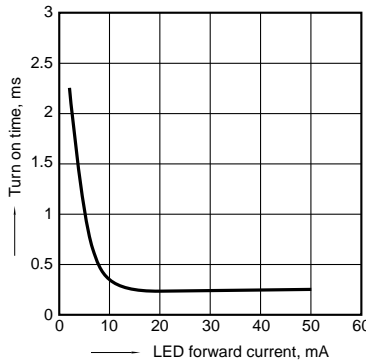


11. LED forward current vs. turn off time characteristics

Measured portion: between terminals 4 and 6; Load voltage: Max.(DC); Continuous load current: Max.(DC); Ambient temperature: 25°C 77°F

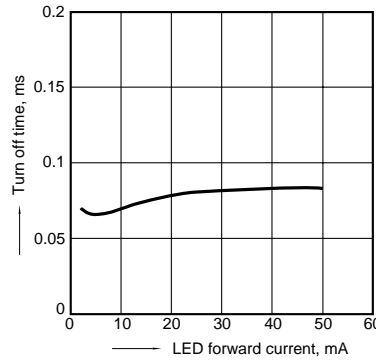

12. Applied voltage vs. output capacitance characteristics

Measured portion: between terminals 4 and 6; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

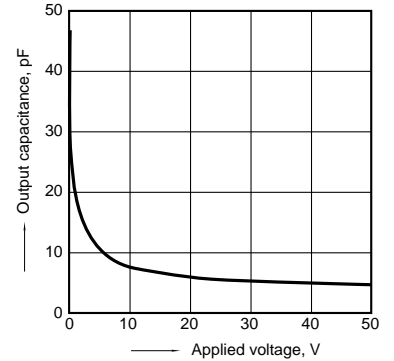

What is current limit

When a load current reaches the specified output control current, a current limit function works against the load current to keep the current a constant value. The current limit circuit built into the PhotoMOS relay thus controls the instantaneous load current to effectively ensure circuit safety.

This safety feature protects circuits down-

stream of the PhotoMOS relay against over-current.

But, if the current-limiting feature is used longer than the specified time, the PhotoMOS relay can be destroyed. Therefore, set the output loss to the max. rate or less.

- Comparison of output voltage and output current characteristics

V-I Characteristics

