


Gecko Screw-Lok Connectors

Female Cable Assemblies

- ❏ 4-finger Beryllium Copper contact.
- ❏ No.1 position identified on moulding.
- ❏ Stainless steel screw fixing to mate with applicable male connector.
- ❏ Back potted for added strain relief.
- ❏ For non-standard cable lengths, please visit harwin.com/cable-assemblies and fill in your requirements.

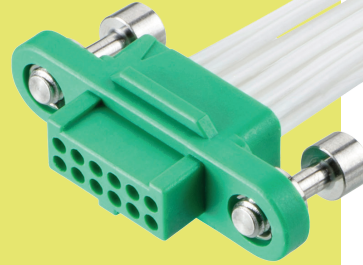

GECKO SCREW-LOK

PART NUMBERING SYSTEM

G125 - F C X XX 05 FX - XXXX X

SERIES CODE

GENDER - FIRST END

F	Female
----------	--------

CABLE SIZE

1	26 AWG
2	28 AWG

TOTAL NO. OF CONTACTS

06, 10, 12, 16, 20, 26, 34, 50

TERMINATION - SECOND END

L	Loose cut end
F0 or F1	Female connector (same as First End)

CABLE LENGTH

0150	150mm
0300	300mm (double-ended)
0450	450mm (single-ended)

SCREW-LOK

F0	No fixings (use with Metal Hoods)
F1	Floating Hex Socket fixings


FINISH

05	Gold
-----------	------

Female Cable Assemblies

- ❖ See previous page for cable length options.
- ❖ Cable assemblies are constructed with Contact 1 attached to Contact 1, Contact 2 to Contact 2, etc.


FEMALE SINGLE ENDED

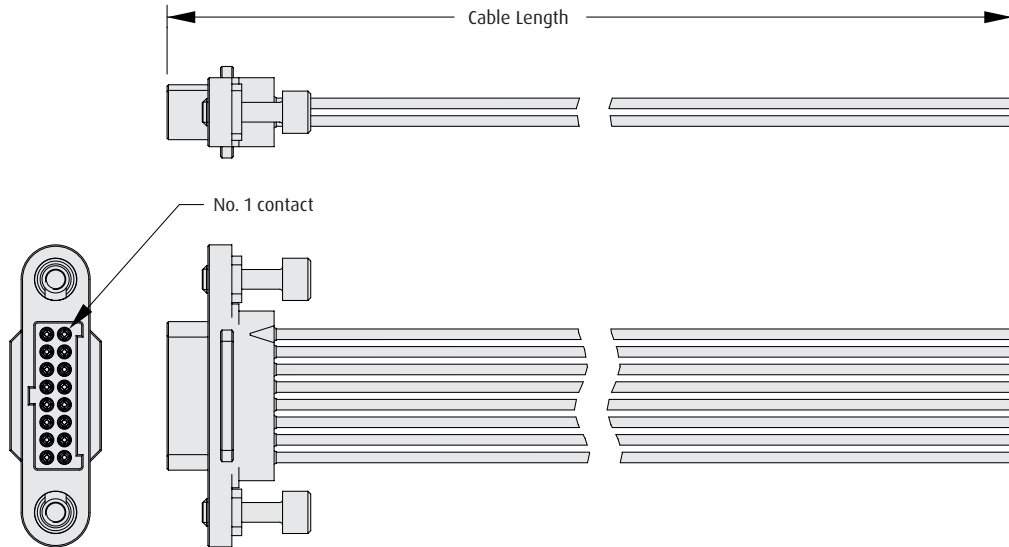

ORDER CODE

G125-FCXX05F1-XXXXL

FEMALE - FEMALE

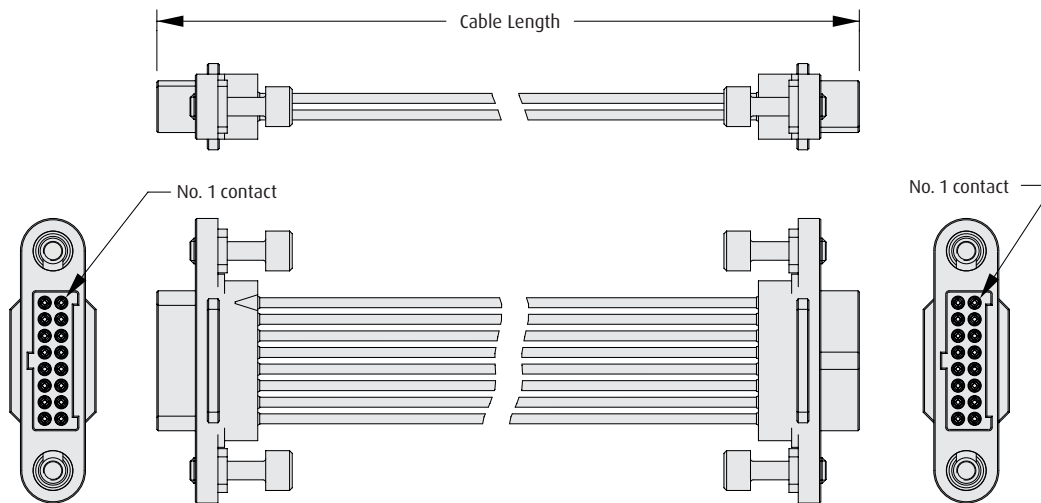

ORDER CODE

G125-FCXX05F1-XXXXF1

All dimensions in mm.

Patent Published