




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP02/19	L.CHAN

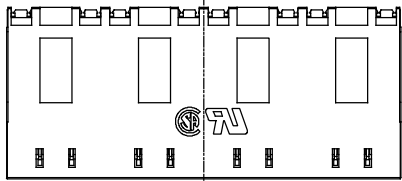



TOP VIEW

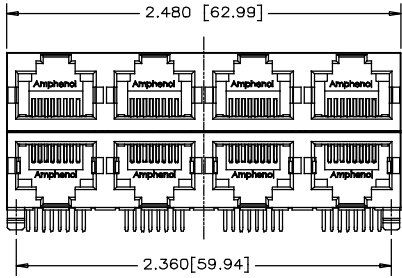


FRONT VIEW

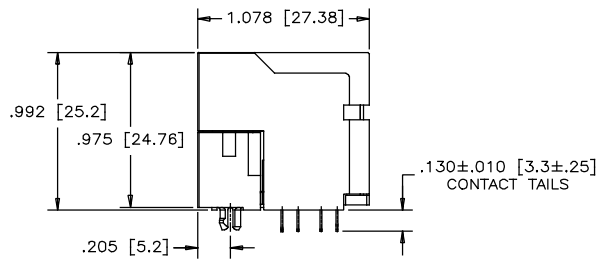

SIDE VIEW

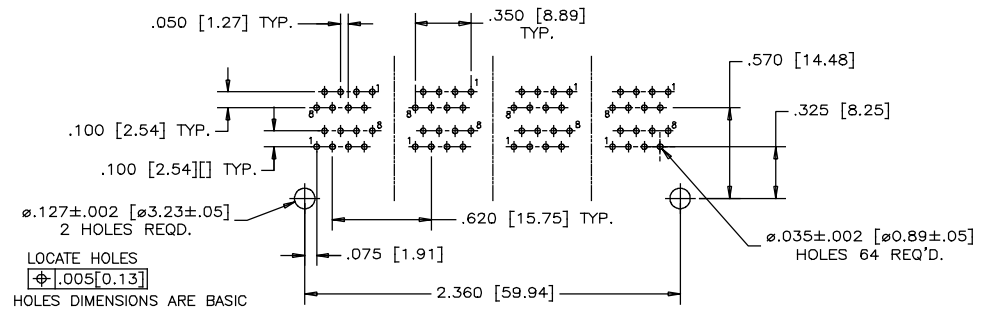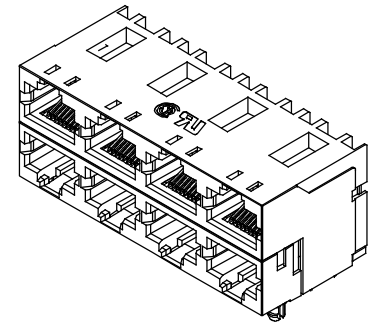

P.C.B. HOLE LAYOUT
(COMPONENT SIDE OF BOARD)

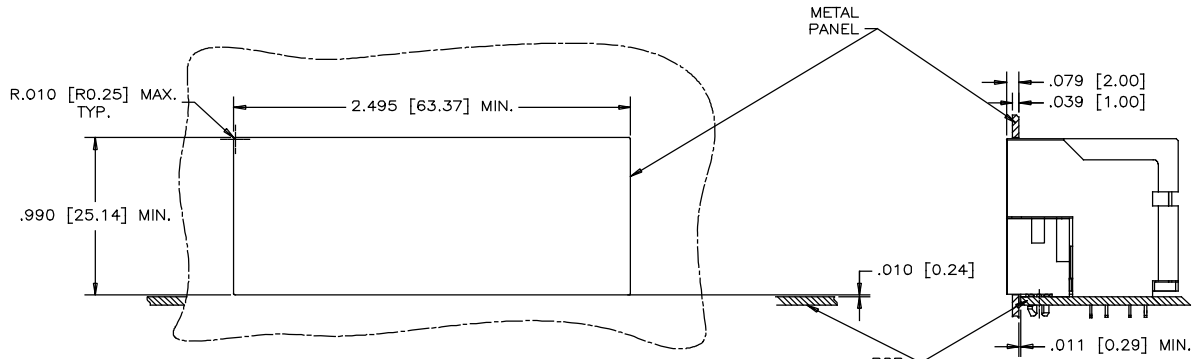

RECOMMENDED PANEL CUTOUT

NOTES:

1. MATERIALS

- HOUSING: ENGINEERING PLASTIC, COLOUR: BLACK. FLAMMABILITY RATING UL 94V-0
- CONTACTS: PHOSPHOR BRONZE
- PLATING: SELECTIVE GOLD PLATING ON MATING SURFACES. SEE PART NO. FOR THICKNESS.
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ" [2.54 MICRONS]
 MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.

RECOMMENDED SOLDERING TEMPERATURE

WAVE SOLDERING PEAKED AT 265°C MAX FOR 10 SECOND MAX.

AMPHENOL PART NUMBER: RJSNE-X080-A8

- GOLD PLATING OPTION
- D = 6u" GOLD PLATING
- G = 15u" GOLD PLATING
- J = 30u" GOLD PLATING
- 5 = 50u" GOLD PLATING

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.

UNLESS SPECIFIED OTHERWISE	DRAWN RONNIE.C	SEP02/19	Amphenol Canada Corp. Commercial Products
PRIMARY UNITS: INCHES SECONDARY: MILLIMETERS	CHECKED KELVIN.T	SEP02/19	
1 DECIMAL PLACE 2 DECIMAL PLACES 3 DECIMAL PLACES ±.015 ANGULAR DEGREES	M.E. APP'D		STACKABLE MODULAR JACK 2X4 PORTS, 8 POSITIONS, 8 CONTACTS, WITHOUT LEDS, UNSHIELDED, WITH 0.13INCH CONTACT TAILS-RoHS COMPLIANT
	Q.A. APP'D		
	DWG APP'D		
REF.	ENG. REL. NO.		DWG NO. P-RJSNE-X080-A8
	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	REV A
	CODE ID NO. 03554	DWG SIZE	SCALE
			SHEET 1 OF 1