
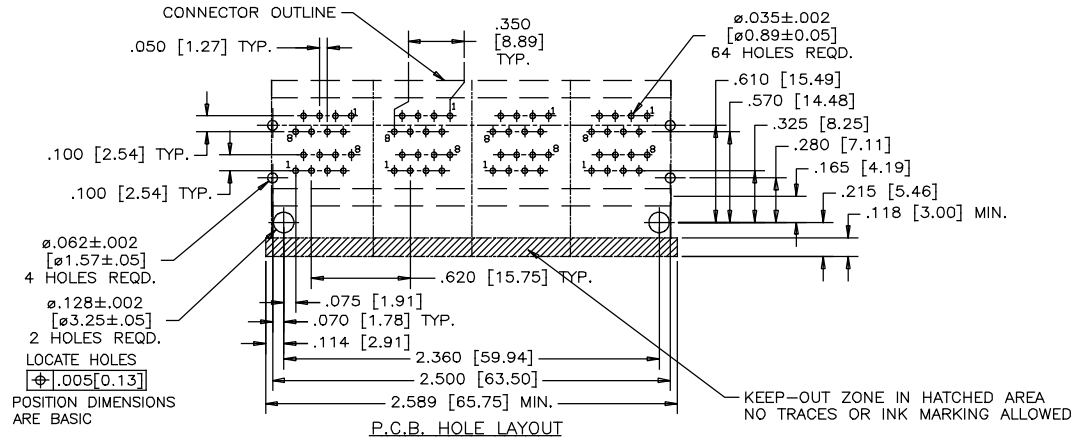
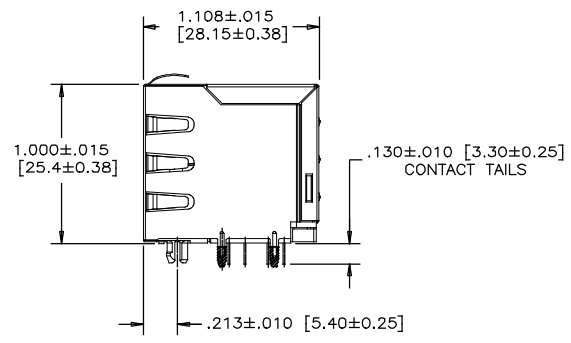
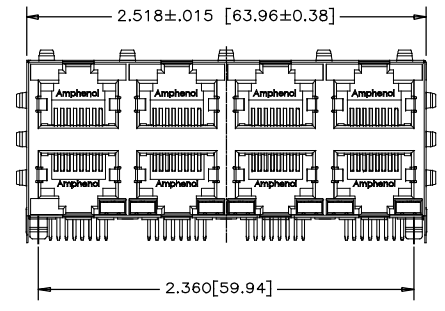


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	FEB.02/2016	L.CHAN
B	FIX THE ERROR FOR THE WIDTH OF CONNECTOR AND PANEL CUTOUT AND PLASTIC MATERIAL.	OCT 10/17	L.CHAN

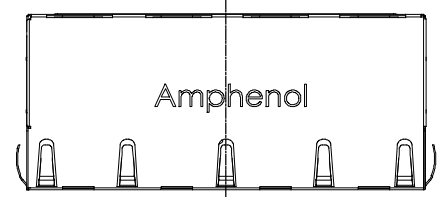


NOTES:

- MATERIALS**
HOUSING: ENGINEERING THERMOPLASTIC, COLOUR: BLACK, FLAMMABILITY RATING UL 94V-0
CONTACTS: PHOSPHOR BRONZE
PLATING: GOLD PLATING ON MATING AREA REFER TO THE AMPHENOL PART NO.
50 μ" [1.27 MICRONS]
MIN. NICKEL UNDERPLATE
100 μ" [2.54 MICRONS]
MIN. MATTE-TIN OR GOLD FLASH ON CONTACT TAILS.
SHIELD: COPPER ALLOY
PLATING: NICKEL
- RECOMMENDED SOLDERING TEMPERATURE**
WAVE SOLDERING PEAKED AT 265°C MAX FOR 10 SECOND MAX.

AMPHENOL PART NUMBER

RJSNE-X380-A8

- GOLD PLATING
- D = 6u"
 - G = 15u"
 - J = 30u"
 - S = 50u"

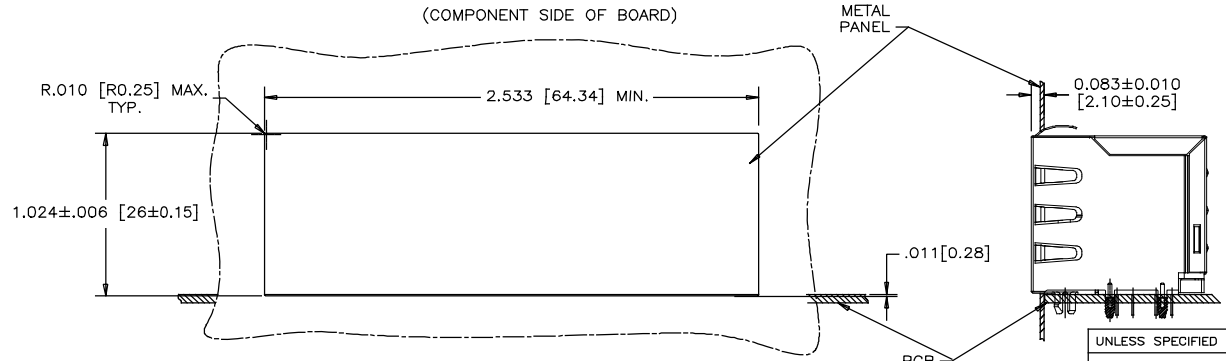

UNLESS SPECIFIED OTHERWISE	DRAWN Jack Guo	FEB02/16
PRIMARY UNITS: INCHES	CHECKED	
SECONDARY: MILLIMETERS	M.E. APP'D	
	Q.A. APP'D	
	DWG APP'D L.CHAN	FEB02/16
	ENG. REL. NO.	
1 DECIMAL PLACE	±.015	REF.
2 DECIMAL PLACES		
3 DECIMAL PLACES		
ANGULAR DEGREES		
	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING

Amphenol Canada Corp. www.amphenolcanada.com	
STACKABLE MODULAR JACK 2X4 PORTS, 8 POSITIONS, 8 CONTACTS, WITHOUT LEDS, SHIELDED, TRAY PACKAGING -RoHS COMPLIANT	
DWG NO.	P-RJSNE-X380-A8
CODE ID NO. 03554	DWG SIZE SCALE SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.