


## TIME DELAY RELAYS

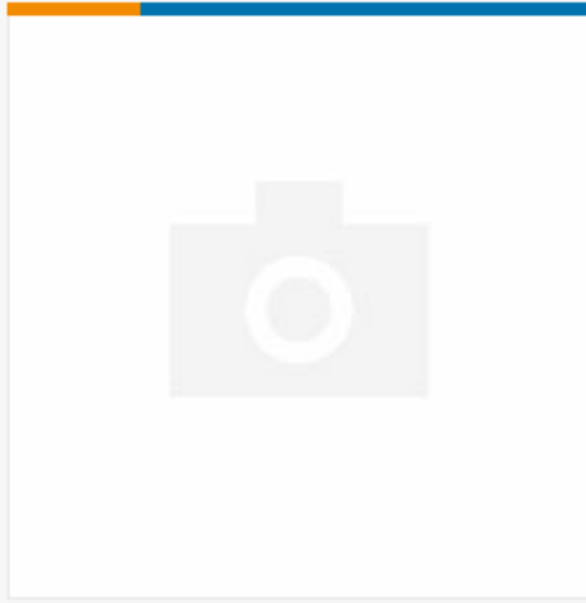

✓ Active

TE CONNECTIVITY

7014ACL=RLY,STD,ON,4P,120VAC,1

1-1423160-1

TE Internal Number: 1-1423160-1

Alias ID: 7014ACL

Not EU RoHS or ELV Compliant

[Find Compliant Alternatives](#)

Type of Control **Knob**

Input Voltage(VAC) **110, 120**

Contact Current Rating(A) **10A@240VAC**

Mode of Operation **On-Delay**

Delay Time **1.5 – 15 seconds**

[> See All Features](#)

North America ▼

Inventory does exist through Waldom (TE's master distributor) but is only available for purchase through a TE authorized distributor. Please contact your preferred authorized distributor for purchasing options.

[FIND AUTHORIZED DISTRIBUTORS](#) [>](#)

<a href="#">SAVE TO LIST</a>	
<a href="#">CHECK FOR TOOLING</a>	
<a href="#">FIND SIMILAR PRODUCTS</a>	

## DOCUMENTATION FEATURES

Please review product documents or [contact us](#) for the latest agency approval information.

Product Type Features	Relay Type	<b>Time Delay</b>
	Product Category	<b>Electromechanical Relays</b>
	Product Type	<b>Relay</b>
Configuration Features	Multiple Timing Ranges	<b>Without</b>
	Electrical Characteristics	
Electrical Characteristics	Input Voltage(VAC)	<b>110, 120</b>
	Actuating System	<b>AC</b>
Contact Features	Type of Control	<b>Knob</b>
	Contact Current Rating(A)	<b>10A@240VAC</b>
	Delay Time	<b>1.5 – 15 seconds</b>
	Contact Arrangement	<b>4 Form C, 4PDT, 4 C/O</b>
Termination Features	Termination Type	<b>Screw Terminal</b>
Mechanical Attachment	Mounting Type	<b>Mounting Bracket</b>
Dimensions	Dimensions (L x W x H) (Approximate)	<b>147.82 x 82.55 x 84.32mm[5.82 x 3.25 x 3.32in]</b>
Usage Conditions	Operating Temperature Range(°C)	<b>-30 – 75</b>
Operation/Application	Mode of Operation	<b>On-Delay</b>
Other	Repeatability (Max)	<b>±10%</b>
	Option	<b>Auxiliary Switch - Instant Transfer</b>
Product Compliance	<a href="#">Statement of Compliance</a> <small>PDF</small> <a href="#">VIEW ALL PRODUCT COMPLIANCE</a>	

## COMPATIBLE

No compatible products found for 1-1423160-1