


COIL: @ 25°C  
 RESISTANCE 2500 OHMS ± 10%  
 NOMINAL VOLTAGE 20.0 VDC  
 MUST OPERATE 4.0 mADC  
 MUST RELEASE 2.0 mADC MAX, 0.40 mADC MIN.

ENVIRONMENT:  
 ② VIBRATION 10 Hz TO 2000 Hz @ 20 g's  
 SHOCK 90 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: ② GENICOM IS 3000 Hz  
 OPERATE 15 MS MAX ③ (GENICOM IS 10 MS MAX)  
 RELEASE 10 MS MAX ④ (GENICOM IS 5 MS MAX)  
 BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

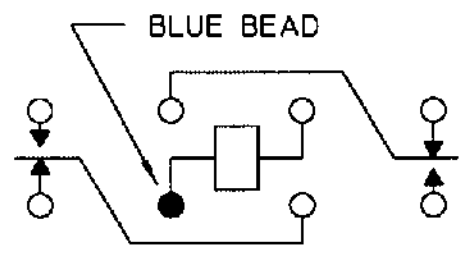

CONTACT RATING: LOW LEVEL TO 2A  
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 5/1/97 CK 5/10/97

COMMUNICATIONS  
 INSTRUMENTS, INC.

CUST. GENICOM  
 CUST. NO. 3SAT6004R1

TYPE 'SF' RELAY

SF5201J06