

# MICRO SWITCH

FREEPORT ILLINOIS, U.S.A  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929

# ASSEMBLY - PUSHBUTTON SWITCH

CATALOG LISTING  
**4PB363**

**4PB363**

PAGE 1 OF 1

**M**


DRAWING  
NUMBER

ISSUE  
4

REVISIONS

A	PR8998	
S	L	B
11 JULY 80		
B	CO-93593	
P P F		
28 OCT 98		
C	CO18499	
SV		
23 FEB 06		


RELEASE NO. PR-8998  
CHECK J A F 28 OCT 98  
CHECK C E B 14 JULY 80  
CHECK C E B 14 JULY 80  
FO-52848-A  
DRAWN

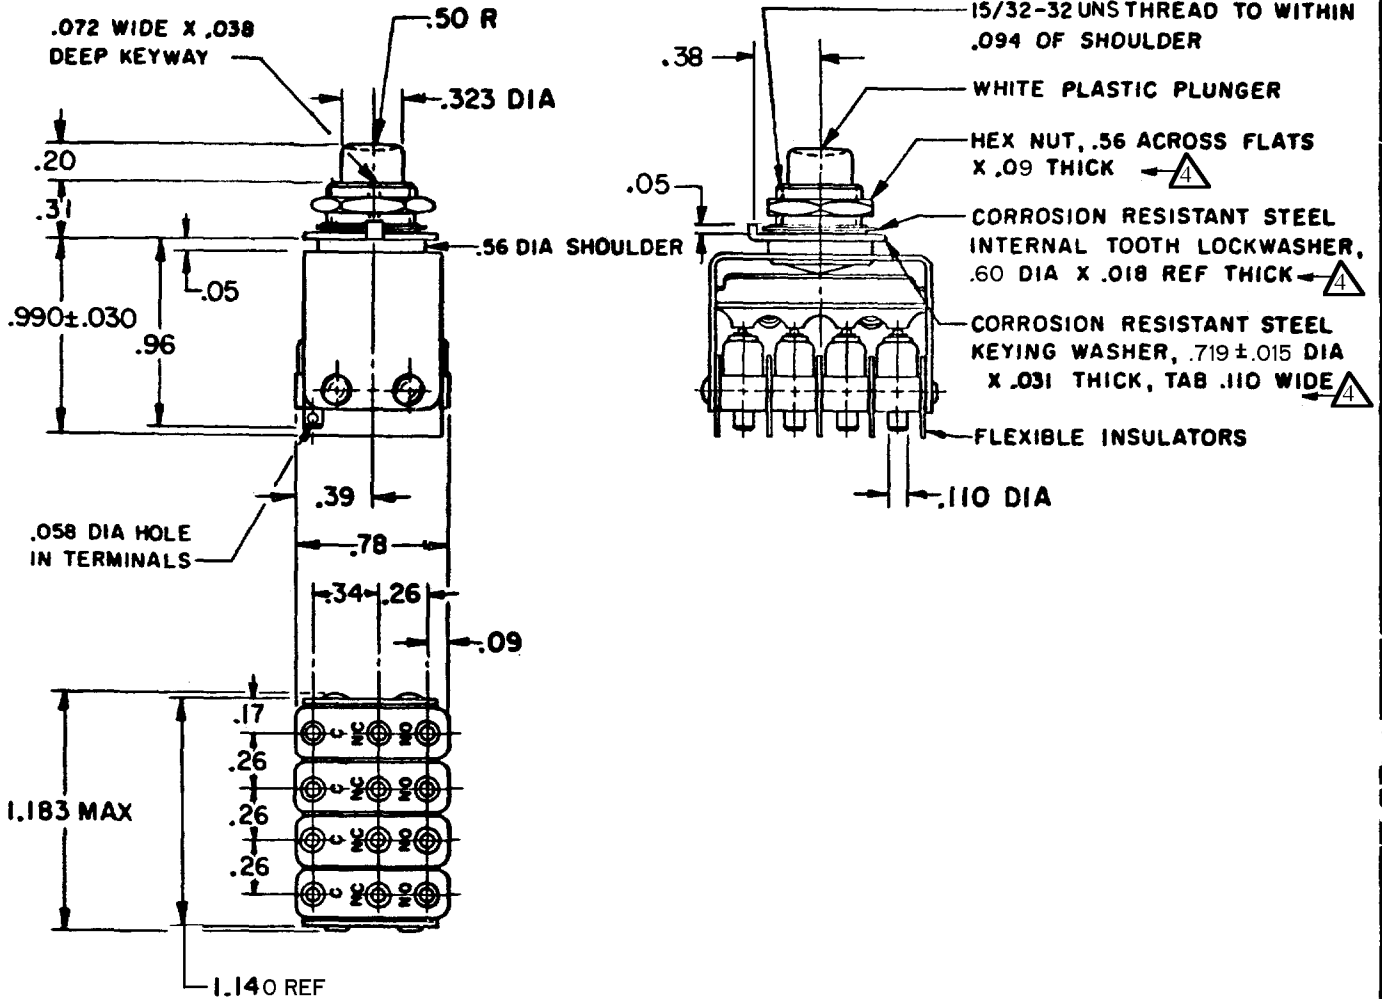

- NOTES**
- 1- UNIT INCLUDES "IISM" TYPE BASIC SWITCH (4)
  - 2- TERMINALS ARE PLATED FOR SOLDERING
  - 3- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- (4) - MOUNTING HARDWARE FURNISHED UNASSEMBLED.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



**CHARACTERISTICS**

OPERATING FORCE --- 35 OZ APPROX  
TOTAL TRAVEL --- .100 APPROX

**ELECTRICAL DATA**

CONTACT ARRANGEMENT  
S P D T (4)

250 VAC --- 5 AMP  
30 VOLTS DC RATING  
INDUCTIVE --- SEA LEVEL --- 3 AMP  
50,000 FT --- 2.5 AMP  
RESISTIVE --- SEA LEVEL --- 5 AMP  
50,000 FT --- 5 AMP  
MAXIMUM INRUSH --- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

**TOLERANCES**  
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE 2

DIM.	TOL.	DIM.	TOL.
mm	mm/in	in	mm/in
NO PLACES	X	17.04	
ONE PLACE	X,X	0.47,018	X,X 0.97,00
TWO PLACES	X,XX	0.157,008	X,XX 0.381,016
THREE PLACES	X,XXX		X,XXX 0.127,006
ANGLES			

SI METRIC  
DESIGN UNITS  US CUSTOMARY

WEIGHT