



92 x 38mm (3.64" X 1.50") AC FAN

3000 Series

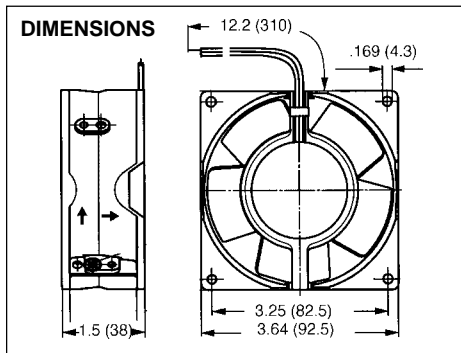

**Leads
Air Exhaust – Over Struts**

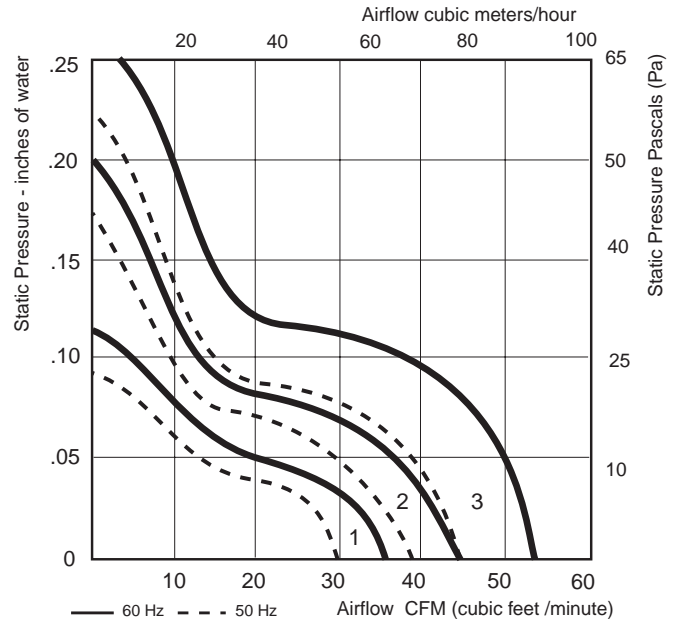

AVAILABLE WITH:

**HIGH PERFORMANCE
SINTEC
SLEEVE BEARING SYSTEM**

3.64" X 3.64" X 1.50" AC Fan, Metal Housing, Metal Impeller, Air Exhaust – Over struts

Curve	PART NUMBER	Type of Bearing	AC Volts	Hertz	Watts	CFM @ 0"	dBA	Temp. Max °C	Wgt. (oz)	Features	Approvals* UL CSA VDE		
1	3800	Sleeve	115	50/60	8	35	27	80	15	18 AWG 12.2" Leads	√	√	√
1	3806	Ball	115	50/60	8	35	28	95	15	18 AWG 12.2" Leads	√	√	√
1	3850	Sleeve	230	50/60	8	35	27	80	15	18 AWG 12.2" Leads	√	√	√
1	3856	Ball	230	50/60	8	35	28	95	15	18 AWG 12.2" Leads	√	√	√
1	3860	Sleeve	115/230	50/60	8	35	27	80	15	18 AWG 12.2" Leads	√	√	√
2	3500	Sleeve	115	50/60	8	44	35	80	15	18 AWG 12.2" Leads	√	√	√
2	3556	Ball	230	50/60	8	44	37	95	15	18 AWG 12.2" Leads	√	√	√
3	3600	Sleeve	115	50/60	11	53	41	65	15	18 AWG 12.2" Leads	√	√	√
3	3606	Ball	115	50/60	11	53	42	75	15	18 AWG 12.2" Leads	√	√	√
3	3650	Sleeve	230	50/60	11	53	41	65	15	18 AWG 12.2" Leads	√	√	√
3	3656	Ball	230	50/60	11	53	42	75	15	18 AWG 12.2" Leads	√	√	√
3	3660	Sleeve	115/230	50/60	11	53	41	65	15	18 AWG 12.2" Leads	√	√	√
3	3666	Ball	115/230	50/60	11	53	42	65	15	18 AWG 12.2" Leads	√	√	√

* UL yellow card E38324, CSA file 27697, VDE file 1182

CONSTRUCTION MOUNTING & CONNECTION	Mounting:	Either face using four .169" (4.3mm) holes.	Housing:	Metal with metal impeller
	Weight:	15 ounces(420g)	Connection:	Leads with stripped, tinned ends