


# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

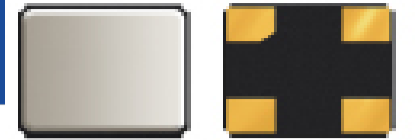

2.5 x 2.0 x 0.6mm

RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## ABM10W SERIES

### FEATURES

- Optimized for energy saving wearables and IoT applications
- Plated at exceptionally low plating capacitance, as low as 4pF, with optimized ESR
- 0.6 mm max height ideally suited for height constrained designs
- Seam sealed for longterm reliability


### APPLICATIONS

- Wearables
- Internet of Things (IoT)
- Bluetooth/Bluetooth Low Energy (BLE)
- Wireless modules
- Machine-to-machine (M2M) connectivity
- Ultra-low power MCU
- Near Field Communication (NFC)
- ISM Band

### STANDARD SPECIFICATIONS

Parameters	Minimum	Typical	Maximum	Units	Notes
Frequency Range	16.0000		50.0000	MHz	
Operation Mode	Fundamental				
Operating Temperature Range	-40		+125	°C	See options
Storage Temperature	-55		+125	°C	
Frequency Tolerance @ +25°C	-10		+10	ppm	See options
Frequency Stability over the Operating Temperature ( ref. to +25°C)	-10		+10	ppm	See options
Equivalent series resistance "R1" (over Operating Temperature Range) (CL=4pF)		< 70	100	Ω	16.0000 – 19.9999MHz
		< 50	80		20.0000 – 29.9999MHz
		< 40	60		30.0000 – 39.9999MHz
		< 25	40		40.0000 – 50.0000MHz
Equivalent series resistance "R1" (over Operating Temperature Range) (CL=6pF, 7pF, 8pF)		< 50	70	Ω	16.0000 – 19.9999MHz
		< 35	50		20.0000 – 29.9999MHz
		< 30	40		30.0000 – 39.9999MHz
		< 25	30		40.0000 – 50.0000MHz
Shunt capacitance (C0)		< 1.0	2.0	pF	
Load capacitance (CL)		4.0		pF	See options
Drive Level		10	100	μW	
Aging (1 year)	-2		+2	ppm	@ 25°C±3°C
Insulation Resistance	500			MΩ	@ 100Vdc ± 15V

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

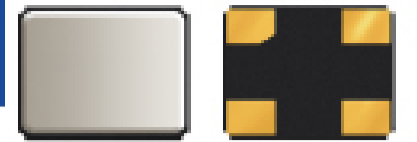

2.5 x 2.0 x 0.6mm




RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## ABM10W SERIES

### OPTIONS AND PART IDENTIFICATION (NOTE 1)

Note 1: Contact Abracon for part number requests with carrier frequency callouts up to 5 & 6 digit accuracy after the decimal.

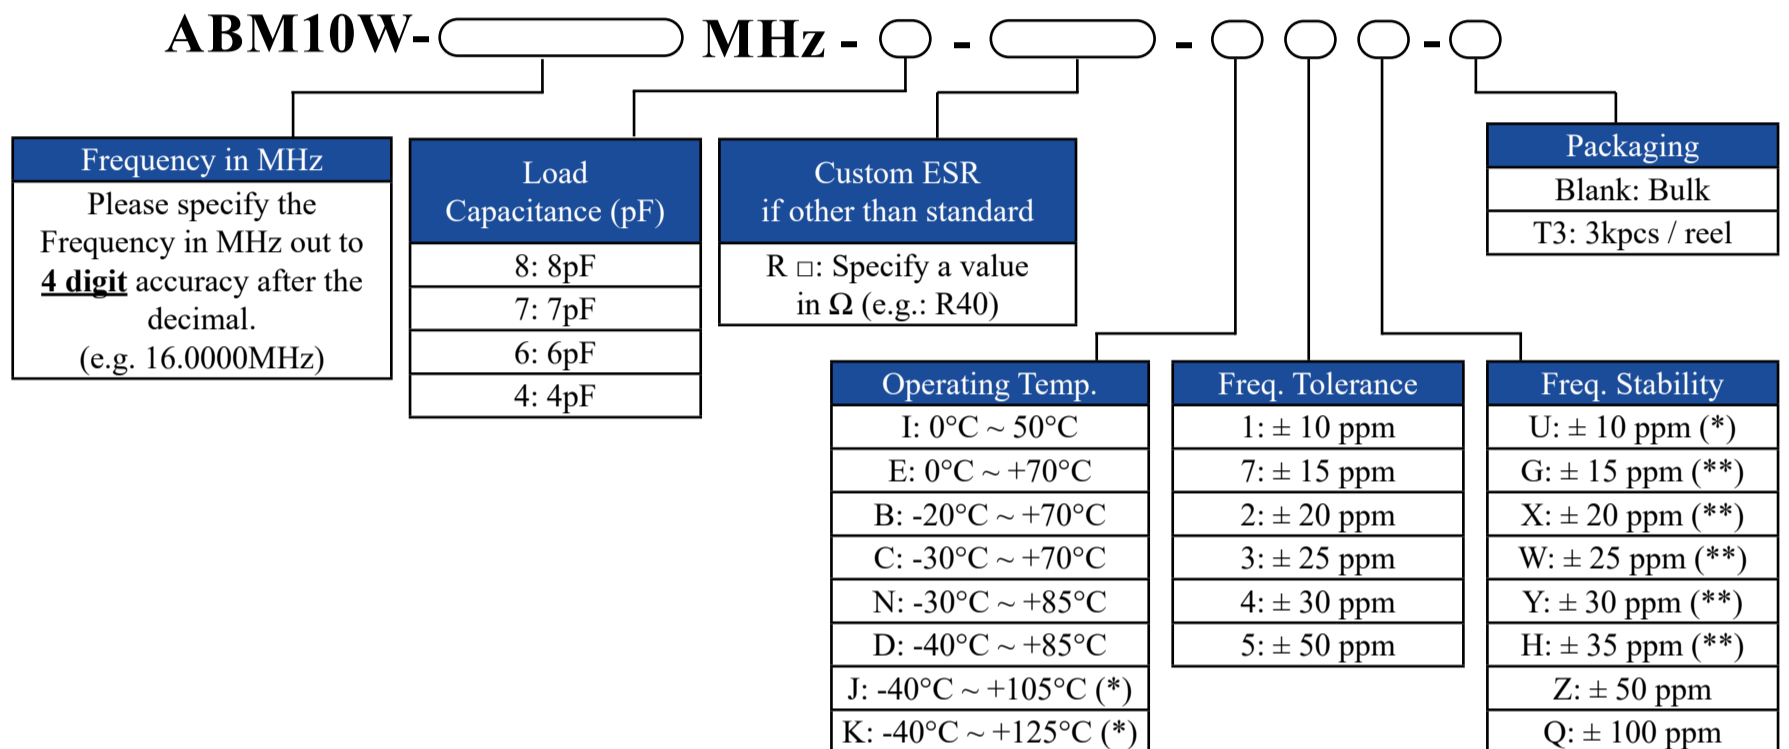

Packaging
Blank: Bulk
T3: 3kpcs / reel

(\*) Only offered @ Freq. Stability options: Z & Q.


Contact ABRACON for tighter Frequency Stability.

(\*) Only offered @ Operating Temp. Range options: I, E, & B

(\*\*) Only offered @ Operating Temp. Range options: I, E, B, C, N, & D

Contact ABRACON for wider Operating Temp. Range.

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

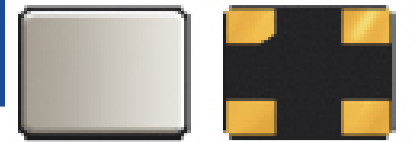

ABM10W SERIES



2.5 x 2.0 x 0.6mm





RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE

## TYPICAL FREQUENCY Vs. TEMPERATURE CHARACTERISTICS

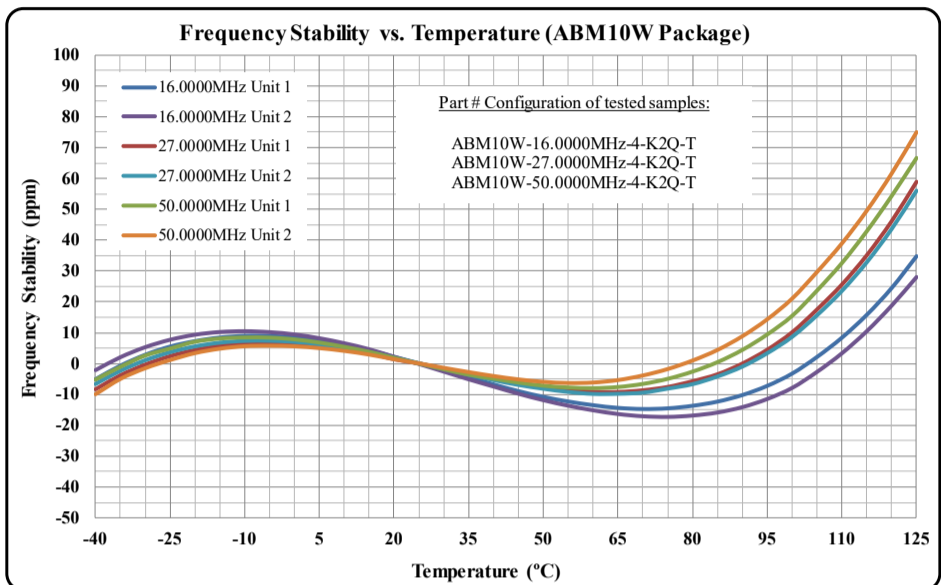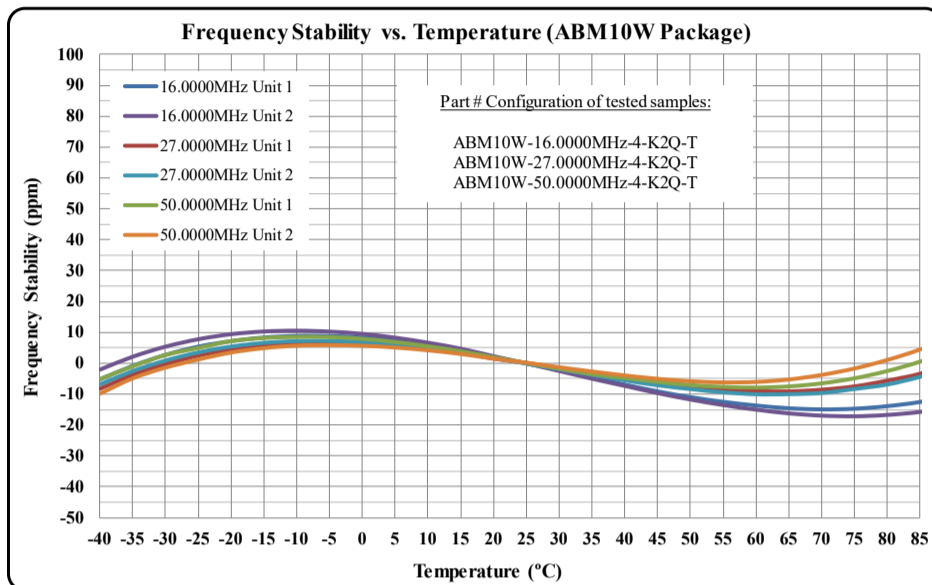

## TYPICAL ESR (EQUIVALENT SERIES RESISTANCE) Vs. TEMPERATURE CHARACTERISTICS

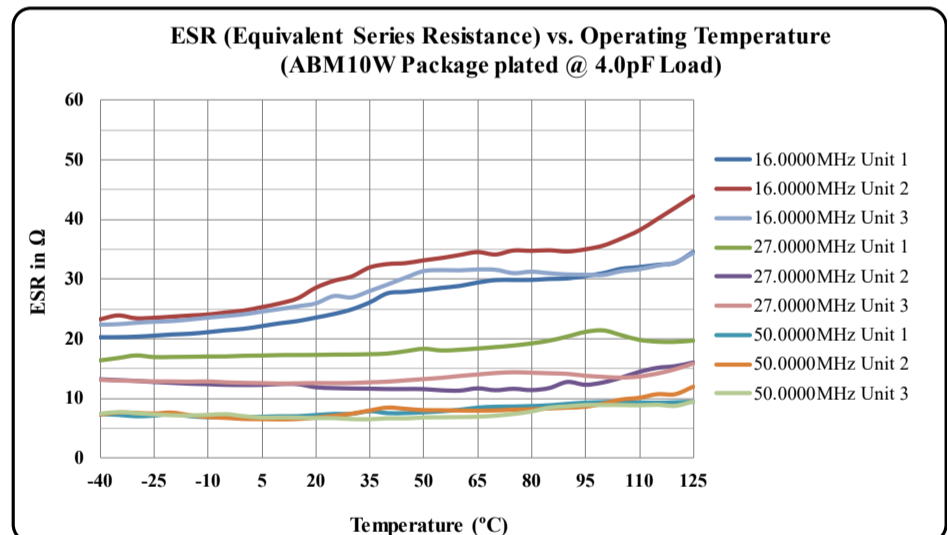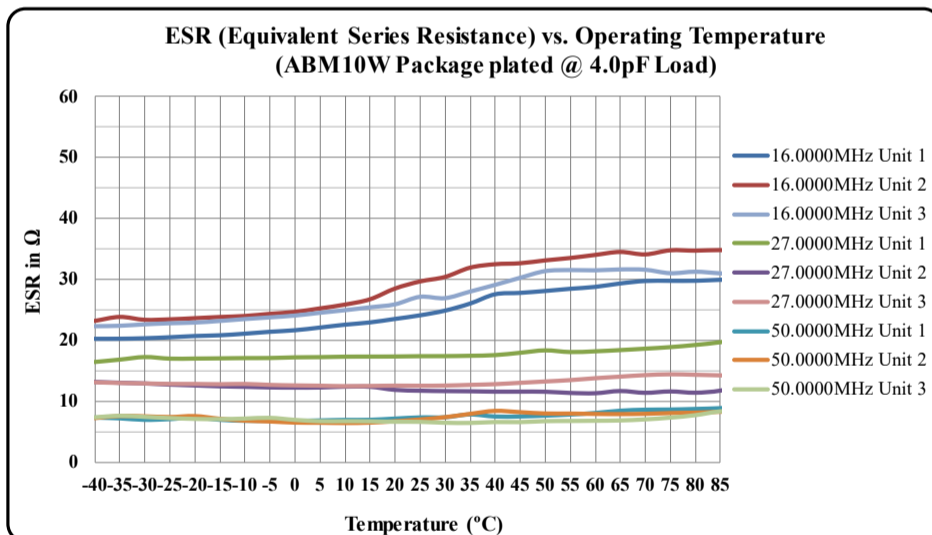

(\* ) Plating Load = Load Capacitance (CL)




5101 Hidden Creek Ln Spicewood TX 78669  
 Phone: 512-371-6159 | Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 10.06.2020

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

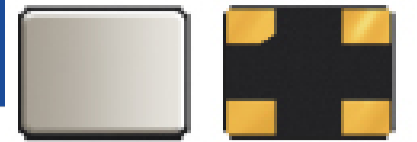

ABM10W SERIES


2.5 x 2.0 x 0.6mm






RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## TYPICAL FREQUENCY TOLERANCE DISTRIBUTION (AT 25°C ± 3°C)

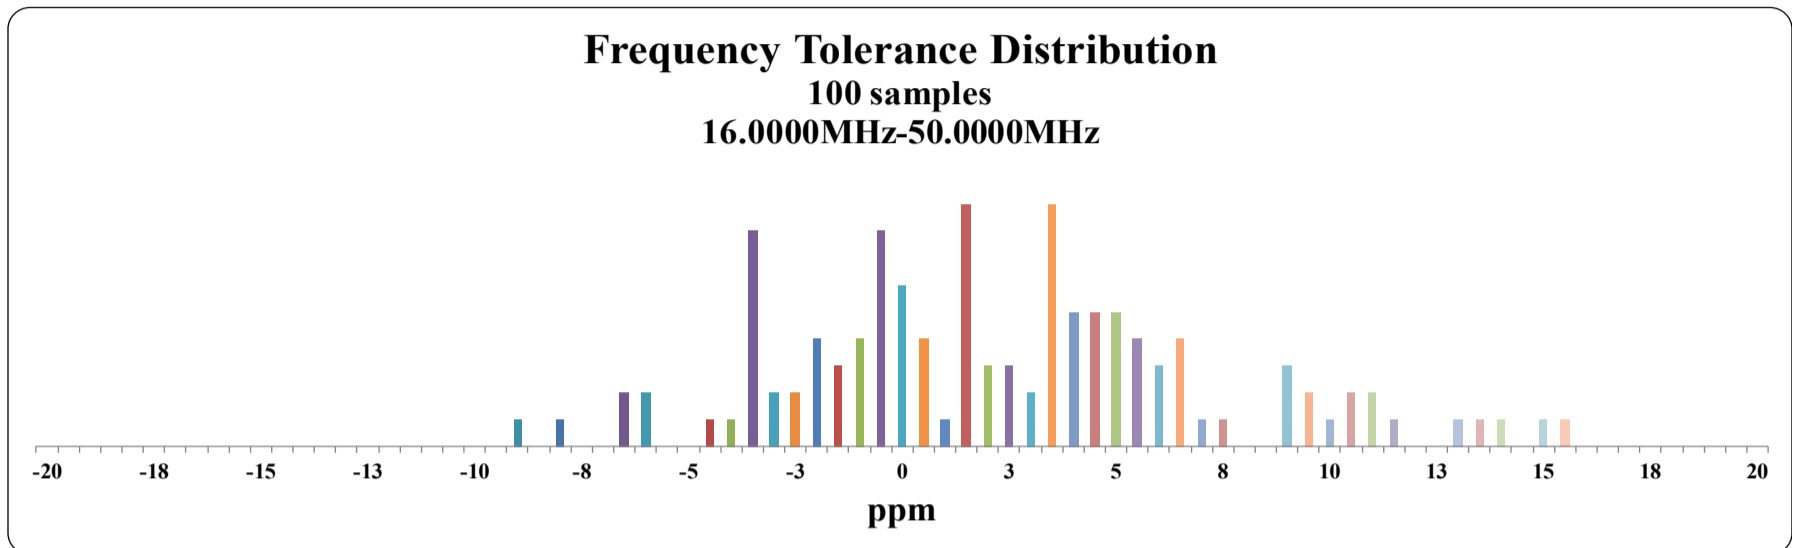

## TYPICAL ESR DISTRIBUTION (AT 25°C ± 3°C)

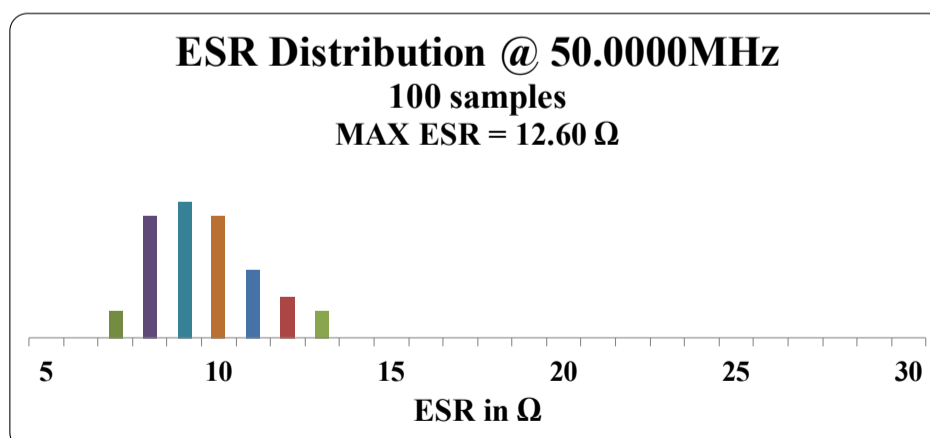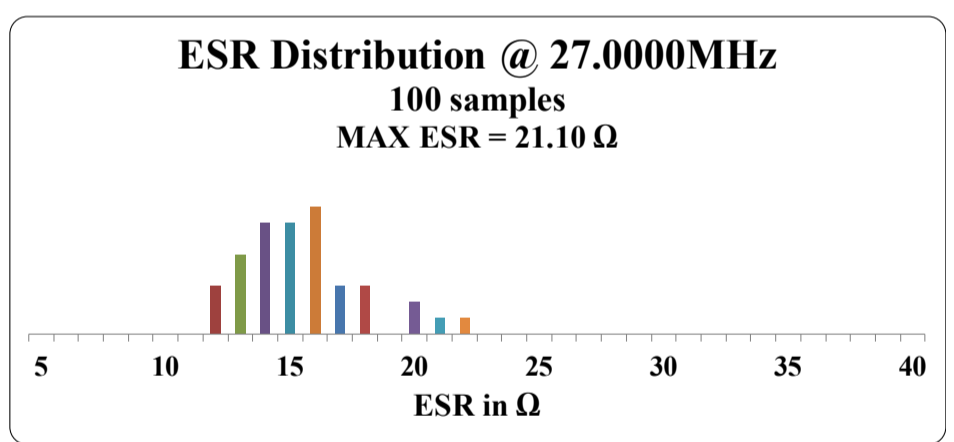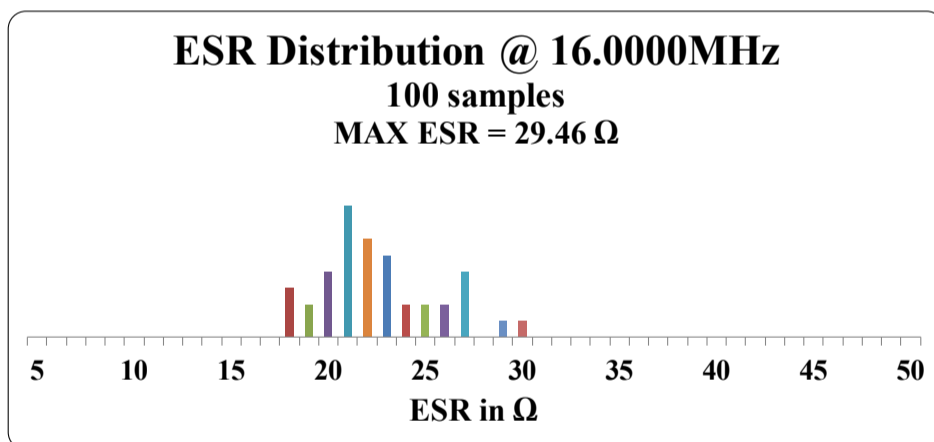

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

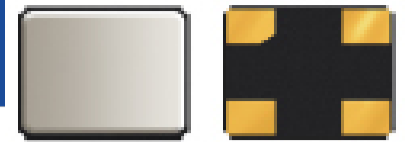

ABM10W SERIES


2.5 x 2.0 x 0.6mm



RoHS/RoHS II Compliant





MSL = N/A: NOT APPLICABLE

## SPICE MODELS (BASED ON TYPICAL VALUES AT 25°C ± 3°C)

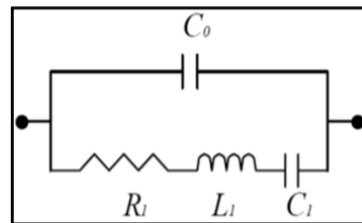

<b>Frequency: 16.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 16.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.65 pF	C0	=	0.65 pF
R1	=	22.77 Ω	R1	=	21.43 Ω
L1	=	70.34 mH	L1	=	70.13 mH
C1	=	1.41 fF	C1	=	1.41 fF
<b>Frequency: 27.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 27.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.65 pF	C0	=	0.66 pF
R1	=	14.39 Ω	R1	=	17.38 Ω
L1	=	16.51 mH	L1	=	16.56 mH
C1	=	2.11 fF	C1	=	2.10 fF
<b>Frequency: 50.0000MHz</b> <b>Plating Load: 4pF</b>			<b>Frequency: 50.0000MHz</b> <b>Plating Load: 6pF</b>		
C0	=	0.89 pF	C0	=	0.87 pF
R1	=	8.40 Ω	R1	=	8.03 Ω
L1	=	3.24 mH	L1	=	3.19 mH
C1	=	3.13 fF	C1	=	3.18 fF

## MECHANICAL DIMENSIONS

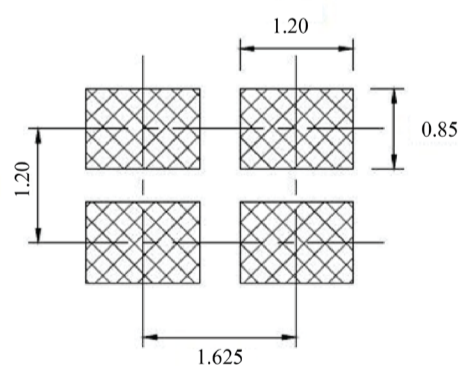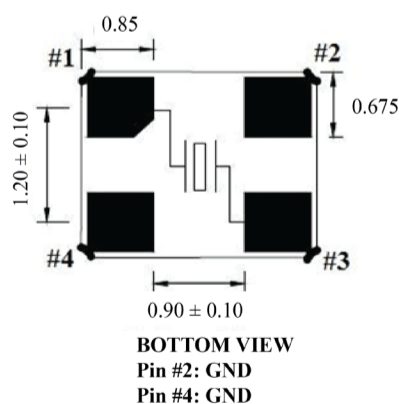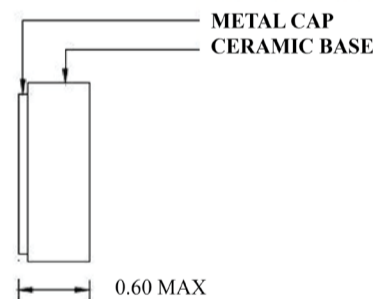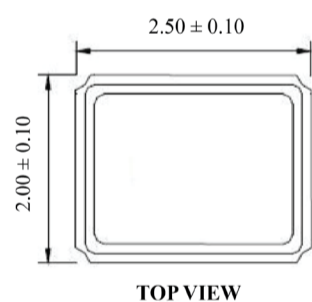

DIMENSIONS: mm

DIMENSIONS: mm

Note:

Due to material availability the Chamfer could be located on pin #1, 2 or 4. Be advised that the Chamfer location has no impact on the electrical performance of the device.




5101 Hidden Creek Ln Spicewood TX 78669  
 Phone: 512-371-6159 | Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 10.06.2020

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# IoT OPTIMIZED LOW PROFILE QUARTZ CRYSTAL

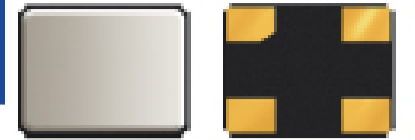

ABM10W SERIES


2.5 x 2.0 x 0.6mm



RoHS/RoHS II Compliant

MSL = N/A: NOT APPLICABLE


## REFLOW PROFILE

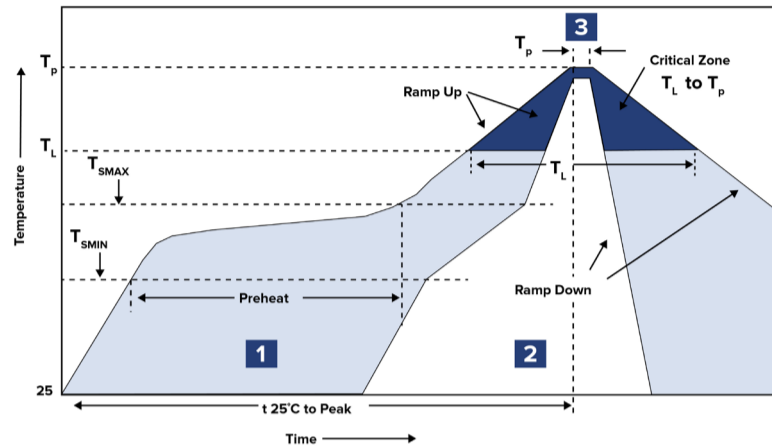

Zone	Description	Temperature	Time
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 180°C	60 ~ 120 sec.
2	Reflow	$T_L$ 217°C	45 ~ 90 sec.
3	Peak Heat	$T_P$ 260°C MAX	10 sec.

## PACKAGING

T3: Tape and reel (3,000 pcs/reel)

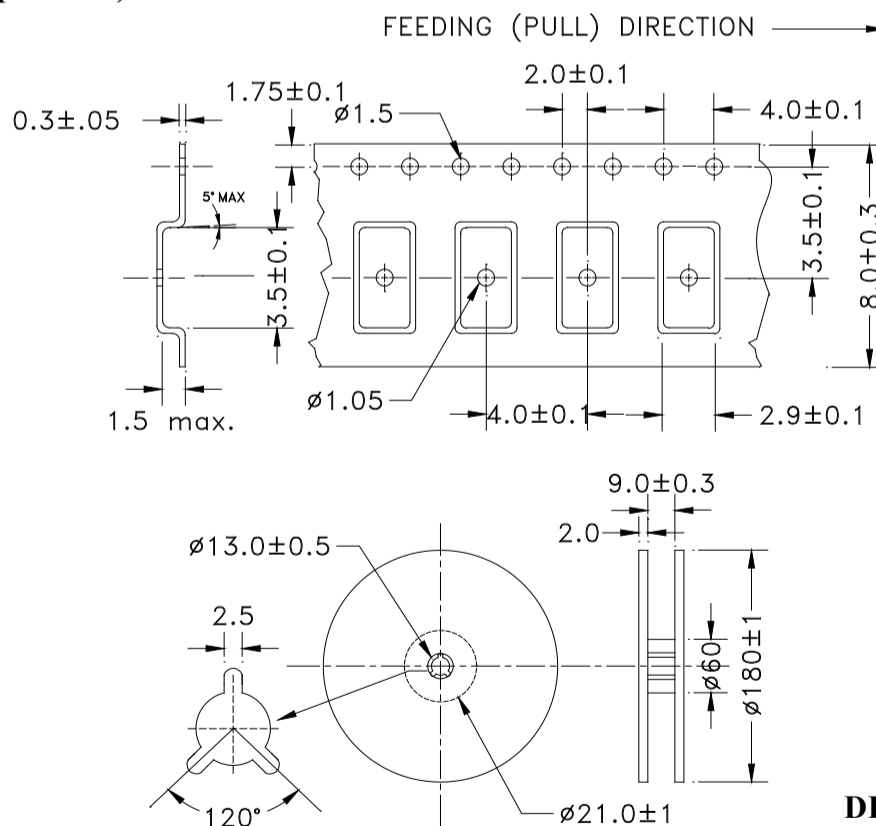

DIMENSIONS:mm



5101 Hidden Creek Ln Spicewood TX 78669  
 Phone: 512-371-6159 | Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISED: 10.06.2020

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## ABRACON:

[ABM10W-49.1520MHZ-8-K1J-T3](#) [ABM10W-27.0000MHZ-8-J2Z-T3](#) [ABM10W-16.6667MHZ-6-J1J-T3](#) [ABM10W-33.8680MHZ-8-D2X-T3](#) [ABM10W-42.0000MHZ-4-B2U-T3](#) [ABM10W-45.0000MHZ-4-D1X-T3](#) [ABM10W-30.7200MHZ-6-K1J-T3](#) [ABM10W-31.2500MHZ-8-K2Z-T3](#) [ABM10W-27.1200MHZ-6-J1J-T3](#) [ABM10W-22.5792MHZ-7-K2J-T3](#) [ABM10W-32.0000MHZ-7-J2Z-T3](#) [ABM10W-21.9487MHZ-4-D2X-T3](#) [ABM10W-41.6000MHZ-4-K2J-T3](#) [ABM10W-18.0800MHZ-6-J2J-T3](#) [ABM10W-24.5454MHZ-6-B2U-T3](#) [ABM10W-24.5535MHZ-7-J2Z-T3](#) [ABM10W-19.2800MHZ-7-K2J-T3](#) [ABM10W-28.6364MHZ-7-J2Z-T3](#) [ABM10W-16.8000MHZ-6-J1Z-T3](#) [ABM10W-24.0000MHZ-4-D1X-T3](#) [ABM10W-18.0896MHZ-7-K2Z-T3](#) [ABM10W-24.3050MHZ-7-K1J-T3](#) [ABM10W-38.8800MHZ-7-D1X-T3](#) [ABM10W-16.6667MHZ-7-J1J-T3](#) [ABM10W-40.6100MHZ-4-K1Z-T3](#) [ABM10W-45.0000MHZ-7-K2J-T3](#) [ABM10W-30.0000MHZ-6-D1X-T3](#) [ABM10W-24.5727MHZ-7-B1U-T3](#) [ABM10W-29.4912MHZ-6-K2J-T3](#) [ABM10W-29.4912MHZ-7-D2X-T3](#) [ABM10W-24.5535MHZ-4-J1Z-T3](#) [ABM10W-22.1184MHZ-8-B1U-T3](#) [ABM10W-19.9680MHZ-7-K2J-T3](#) [ABM10W-16.3676MHZ-6-K2J-T3](#) [ABM10W-24.5455MHZ-4-D2X-T3](#) [ABM10W-20.0000MHZ-4-D2X-T3](#) [ABM10W-16.9344MHZ-4-J2J-T3](#) [ABM10W-40.9600MHZ-8-K1Z-T3](#) [ABM10W-35.4160MHZ-7-J2J-T3](#) [ABM10W-33.0000MHZ-7-K1J-T3](#) [ABM10W-16.0000MHZ-6-J1J-T3](#) [ABM10W-38.4000MHZ-7-K1J-T3](#) [ABM10W-49.1520MHZ-8-D1X-T3](#) [ABM10W-24.5455MHZ-4-J2J-T3](#) [ABM10W-16.0000MHZ-7-D2X-T3](#) [ABM10W-32.0000MHZ-6-J1J-T3](#) [ABM10W-25.0000MHZ-8-K1J-T3](#) [ABM10W-18.0800MHZ-8-J1J-T3](#) [ABM10W-38.8800MHZ-7-K1J-T3](#) [ABM10W-20.0000MHZ-6-K2Z-T3](#) [ABM10W-41.6000MHZ-4-J1Z-T3](#) [ABM10W-44.0000MHZ-4-J1J-T3](#) [ABM10W-24.5455MHZ-8-J2J-T3](#) [ABM10W-16.93MHZ-4-K2J-T3](#) [ABM10W-19.2000MHZ-7-D1X-T3](#) [ABM10W-44.0000MHZ-7-B2U-T3](#) [ABM10W-42.0000MHZ-4-D1X-T3](#) [ABM10W-48.0000MHZ-7-K2J-T3](#) [ABM10W-33.8680MHZ-7-D2X-T3](#) [ABM10W-19.6800MHZ-7-J2J-T3](#) [ABM10W-24.0000MHZ-7-J1J-T3](#) [ABM10W-38.0000MHZ-6-K1J-T3](#) [ABM10W-26.0000MHZ-6-J1Z-T3](#) [ABM10W-48.0000MHZ-6-J2Z-T3](#) [ABM10W-18.4320MHZ-7-K2Z-T3](#) [ABM10W-40.6100MHZ-7-K1J-T3](#) [ABM10W-22.5792MHZ-8-D1X-T3](#) [ABM10W-40.9600MHZ-6-K2Z-T3](#) [ABM10W-41.6000MHZ-8-J1Z-T3](#) [ABM10W-33.8688MHZ-6-D1X-T3](#) [ABM10W-24.0000MHZ-8-J2J-T3](#) [ABM10W-37.4000MHZ-7-K2J-T3](#) [ABM10W-18.0896MHZ-6-K1Z-T3](#) [ABM10W-16.9344MHZ-7-J1J-T3](#) [ABM10W-19.6800MHZ-4-D1X-T3](#) [ABM10W-30.4000MHZ-8-J2J-T3](#) [ABM10W-38.8800MHZ-4-J2J-T3](#) [ABM10W-32.0000MHZ-8-J2Z-T3](#) [ABM10W-37.0500MHZ-8-K2J-T3](#) [ABM10W-22.5792MHZ-7-B2U-T3](#) [ABM10W-27.0000MHZ-6-J2Z-T3](#) [ABM10W-31.2500MHZ-4-B1U-T3](#) [ABM10W-39.0000MHZ-4-D1X-T3](#) [ABM10W-49.1520MHZ-6-K1J-T3](#) [ABM10W-30.4000MHZ-7-K1Z-T3](#) [ABM10W-16.93MHZ-6-K2J-T3](#) [ABM10W-16.9344MHZ-4-K1Z-T3](#) [ABM10W-40.9600MHZ-8-D2X-T3](#) [ABM10W-24.5454MHZ-7-K2J-T3](#) [ABM10W-24.3050MHZ-6-K2J-T3](#) [ABM10W-26.0000MHZ-4-K1Z-T3](#) [ABM10W-40.0000MHZ-8-K2J-T3](#) [ABM10W-16.9344MHZ-8-K1J-T3](#) [ABM10W-16.3676MHZ-6-J2J-T3](#) [ABM10W-16.3840MHZ-8-D2X-T3](#) [ABM10W-39.0000MHZ-6-K2J-T3](#) [ABM10W-28.6364MHZ-4-](#)