



HCMOS 7x5mm SMD Oscillator

O7HH
(former F3345 Series)
DATASHEET

- HCMOS Output
- Stabilities to ± 20 PPM
- Temperature Ranges as wide as -40°C to $+85^{\circ}\text{C}$
- Supply Voltages: 5.0V

5.0V ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (F_0)	1 ~ 125 MHz
Storage Temperature Range (T_{STG})	$-55 \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	$5.0 \pm 10\%$
Input Current (I_{DD})	
01.000 ~ 25.000 MHz	25 mA
25.000+ ~ 50.000 MHz	40 mA
50.000+ ~ 67.000 MHz	60 mA
67.000+ ~ 80.000 MHz	73 mA
80.000+ ~ 125.000 MHz	90 mA
Output Symmetry (50% V_{DD})	45 % ~ 55 %
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	
1.000 ~ 125.000 MHz	7 nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Current (I_{OL})	16 mA Min
(I_{OH})	-16 mA Min
Output Load (HCMOS)	50 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	100 nS
Output Enable Time ¹	100 nS

ENABLE / DISABLE FUNCTION

Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\% V_{DD}$	Active
'0' Level $V_{IL} \leq 30\% V_{DD}$	High Z

• Available Options by Stability & Operating Temp for 5.0V²

Frequency Stability ²	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}$	$-10 \sim +70$	1.000 ~ 125.000
$\pm 100\text{PPM}$	$-40 \sim +85$	1.000 ~ 80.000
$\pm 50\text{PPM}$	$-10 \sim +70$	1.000 ~ 80.000
$\pm 50\text{PPM}$	$-40 \sim +85$	1.000 ~ 80.000
$\pm 25\text{PPM}$	$-10 \sim +70$	1.000 ~ 80.000
$\pm 25\text{PPM}$	$-40 \sim +85$	1.000 ~ 80.000
$\pm 20\text{PPM}^*$	$-10 \sim +70$	1.000 ~ 80.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open


² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, reflow, and one year aging. *Excludes Shock/Vibration.

Notes:

A $0.01\mu\text{F}$ capacitor should be placed between V_{DD} (Pin 4) and GND (Pin2) to minimize power supply line noise.

Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary

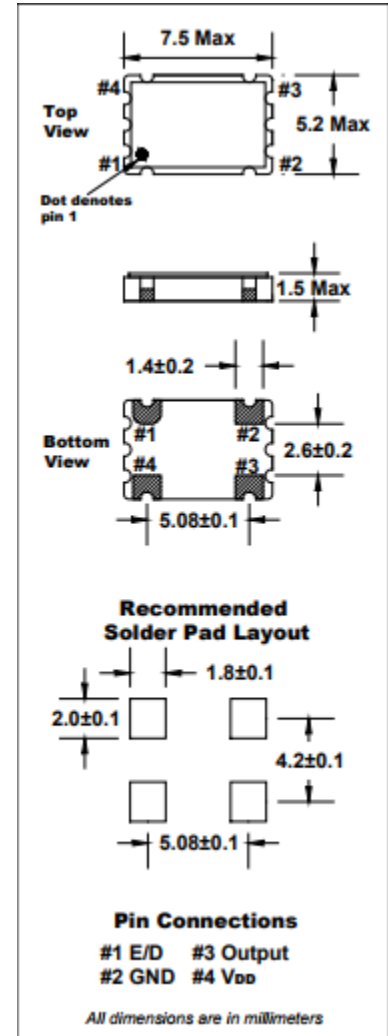

Maximum Soldering Temp / Time	260°C / 10 Seconds
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam Seal
Lead (Pb) Free	Yes
ROHS/REACH Compliant	Yes


	Title / Description: O7HH SERIES STANDARD SPECIFICATIONS	
	Drawing Number: 101164	Size: A
	Part Number:	Cage: 61429
	Draftsperson: MK	Approved: RB
		Revision Date: 08/23/2017

© Copyright 2017 Fox Electronics, All rights reserved



HCMOS 7x5mm SMD Oscillator

O7HH
(former F3345 Series)
DATASHEET

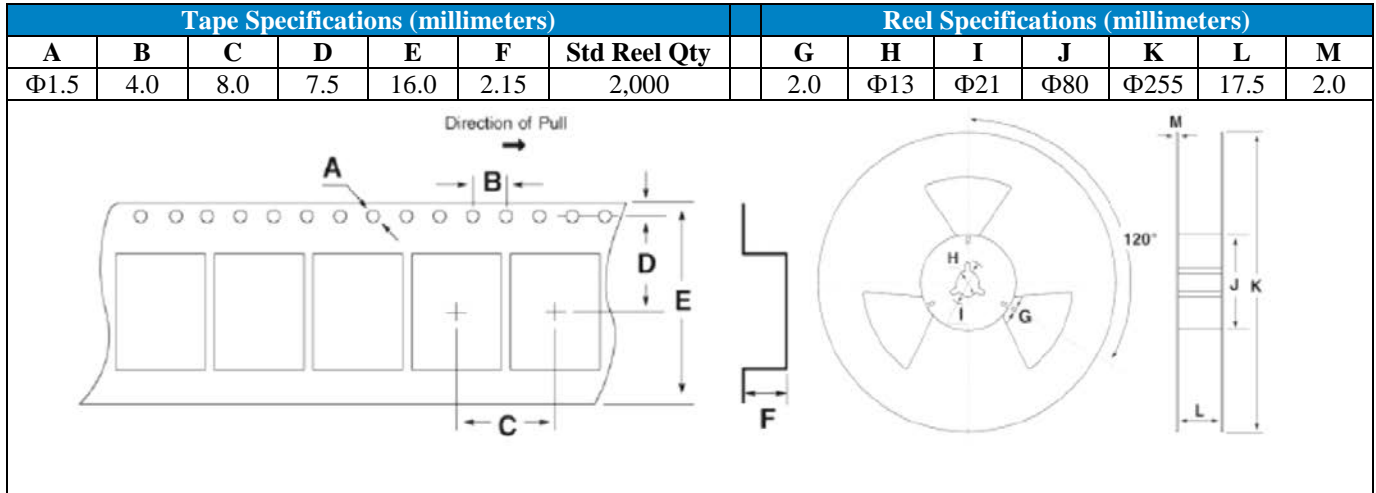

Available Options & Part Identification*

Example: **F O7HH A B M 25.0**

F	O7HH	A	B	M	25.0
Fox	Model Number	Voltage A = 5V±10%	Stability A = 100 PPM B = 50 PPM D = 25 PPM E = 20 PPM	Operating Temperature E = -10 to +70°C M = -40 to +85°C	Frequency

*Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps on page 1.



Corporate Headquarters
5570 Enterprise Parkway
Fort Myers, FL 33905
<http://www.FOXONLINE.com>

Sales
1-888-GET-2-FOX (1-888-438-2369)
or
1-239-693-0099
<http://www.FOXONLINE.com/repdisty>

Tech Support
<http://www.FOXONLINE.com/email>

Product use: Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners.

	Title / Description: O7HH SERIES STANDARD SPECIFICATIONS		
	Drawing Number: 101164	Size: A	
	Part Number:	Cage: 61429	
	Draftsperson: MK	Approved: RB	Revision Date: 08/23/2017

© Copyright 2017 Fox Electronics. All rights reserved