
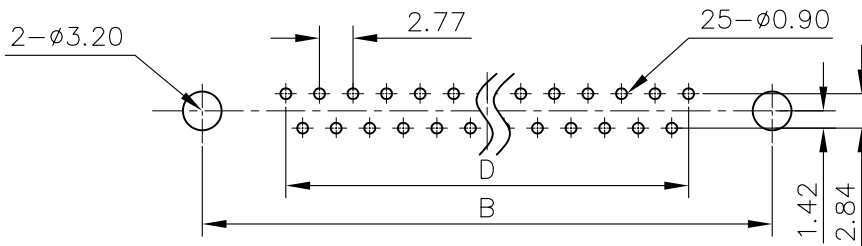
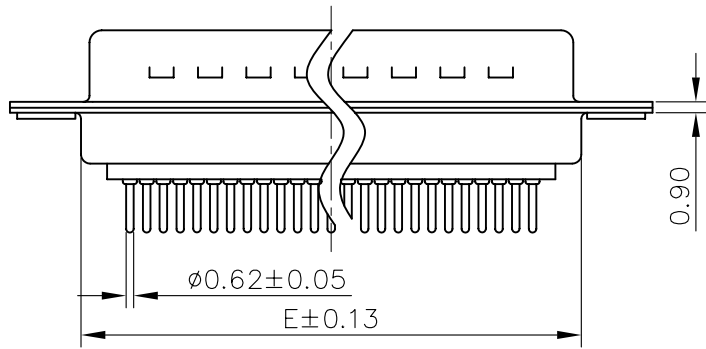



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

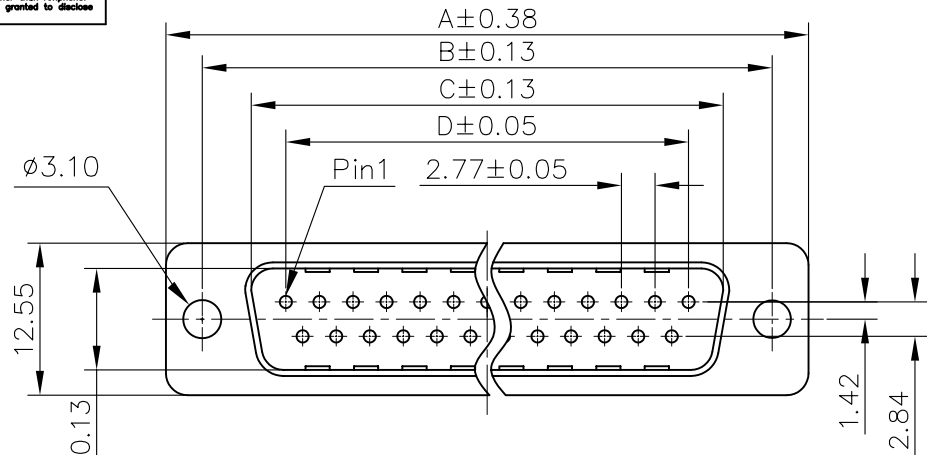

RECOMMENDED P.C.B LAYOUT
(TOLERANCE +/- 0.03)

POSITION	A	B	C	D	E
9	30.84	24.99	16.92	11.09	19.28
15	39.24	33.32	24.70	19.39	27.51
25	53.04	47.04	38.96	33.24	41.30
37	69.32	63.50	55.42	49.86	57.71


REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1		Initial Release	07/14/10	IP

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel
 BODY : Glass filled thermoplastic.
 Flame retarding to UL94 V-0 Color Black
 CONTACTS : Brass.
 0.76um(30u") min gold over 1.25um (50u") min nickel
 ELECTRICAL : Voltage rating : 250 V RMS at 50 Hz
 Current rating 5A.
 Insulation resistance >1000 M Ohms
 Contact resistance 20 mOhms max.
 CLIMATIC : Temperature range -55°C up to 125°C
 MARKING : Amphenol Logo
 Commercial Code
 Manufacturing date(YWW)

PRODUCT CODE

L 717 SD X XX P OL2 C309

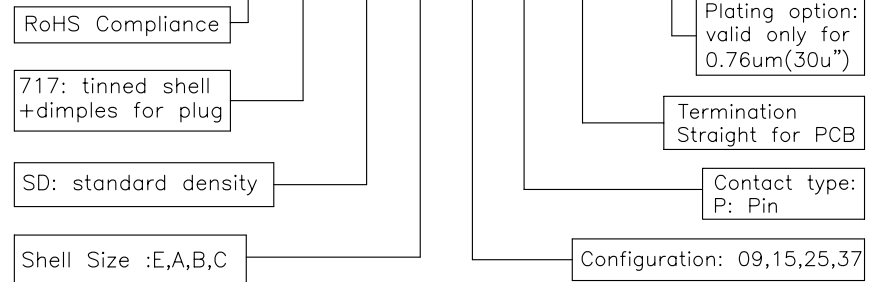

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	Checked	DATE
.X +/-	0.50	Lamon Ho		07/14/10
.XX +/-	0.30	CHECKED	Lak Wang	07/14/10
.XXX +/-	0.20	CHECKED		
FRACTIONS +/-				
ANGLES +/-	2'			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol		
TITLE		
Stamped and Formed connector, SD series		
SIZE	DRAWING NO.	REV.
A4	C L717SDXXXPOL2C309	1
SCALE	NONE	SHEET 1 OF 1