
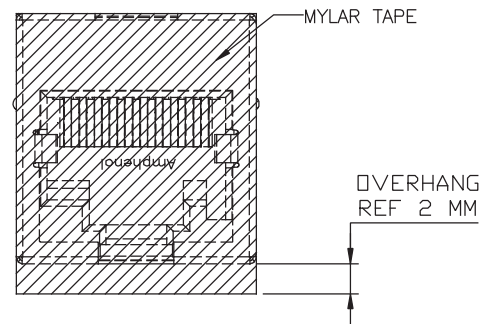

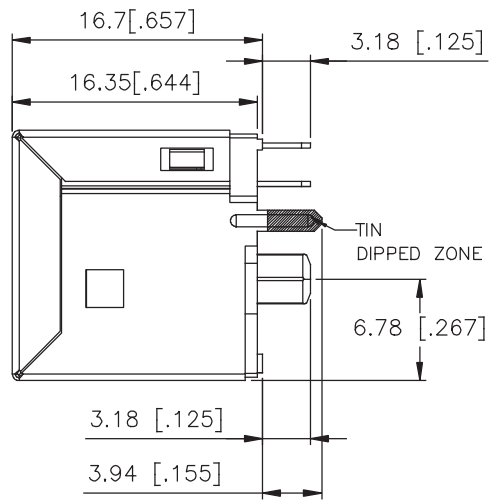


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN15/12	A.G
B	CORRECT GOLD PLATING SPEC.	SEP29/12	L.CHAN
C	CORRECT "AMPHENOL" LOGO DIRECTION	OCT29/13	L.CHAN

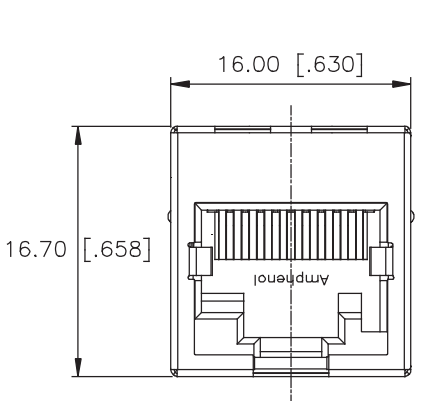


1. MATERIALS:
 PLASTIC HOUSING: THERMOPLASTIC PER MATERIAL OPTION IN PART NO.
 FLAMMABILITY RATING UL 94V-0
 COLOUR: BLACK

CONTACTS: PHOSPHOR BRONZE
 PLATING: REFER TO PART NO. FOR GOLD THICKNESS ON MATING SURFACES.
 50 μ " [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ " [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

SHIELD: STAINLESS STEEL WITH TIN DIPPED PCB TAILS.
 2, THE DRAWING VIEWS ARE BASED ON PRODUCT WITH SHIELD.

AMPHENOL PART NUMBER: RJE74-1XX-XX11-X

NUMBER OF POSITION
 8 = 8 POSITION
 A = 10 POSITION
 NUMBER OF CONTACT
 4 = 4 CONTACT
 6 = 6 CONTACT
 8 = 8 CONTACT
 A = 10 CONTACT
 SHIELD OPTION
 0 = NO SHIELD
 1 = FULL SHIELD
 BLANK = PBT, TRAY PACKAGING, W/O MYLAR
 A = HIGH TEMP. MATERIAL, TRAY PACKAGING, W/O MYLAR
 H = HIGH TEMP. MATERIAL TAPE/REEL PACKAGING, WITH MYLAR
 GOLD PLATING
 1 = 6 μ " 3 = 30 μ "
 2 = 15 μ " 4 = 50 μ "

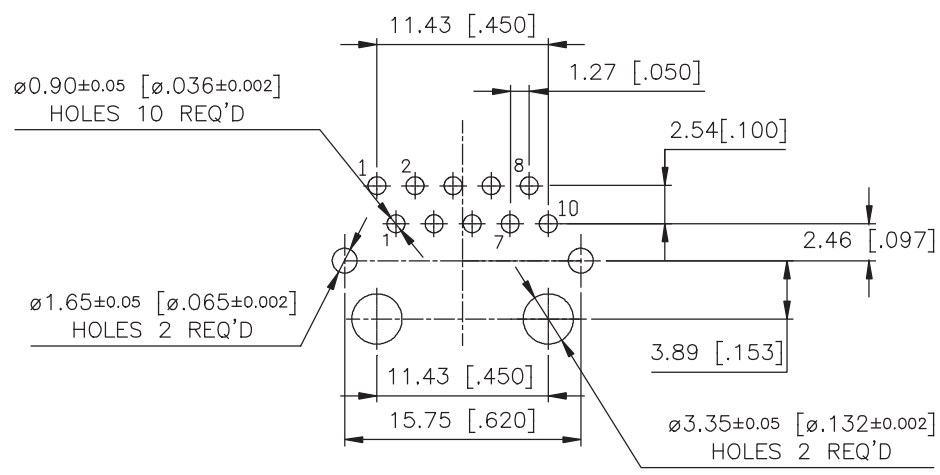


LOCATE HOLES
 ϕ [0.13 [0.005]]
 POSITION DIMENSIONS ARE BASIC

RECOMMENDED P.C.B LAYOUT
 (COMPONENT SIDE OF BOARD
 TOLERANCES: +/- 0.05 [0.002],
 BASED ON PRODUCT WITH SHIELD)

UNLESS SPECIFIED OTHERWISE	DRAWN B.COPPING	JUN15/12	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS MILLIMETERS	CHECKED		
SECONDARY INCHES	M.E. APP'D		MODULAR JACK, POSITION & CONTACT OPTION, WITH SHIELD OPTION, KAPTON TAPE OPTION, WITH KEYING FEATURE—ROHS COMPLIANT
REFERENCE IN PARENTHESES	Q.A. APP'D		
	DWG APP'D A.GREEN	JUN15/12	DWG NO. P-RJE74-1XX-XX11-X
	ENG. REL NO.		
	REF.		REV C
	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	CODE ID NO. 03554 DWG SIZE SCALE SHEET 1 OF 2

REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JUN15/12	A.G
B	CORRECT GOLD PLATING SPEC	SEP29/12	L.CHAN
C	CORRECT "AMPHENOL" LOGO DIRECTION	OCT29/13	L.CHAN

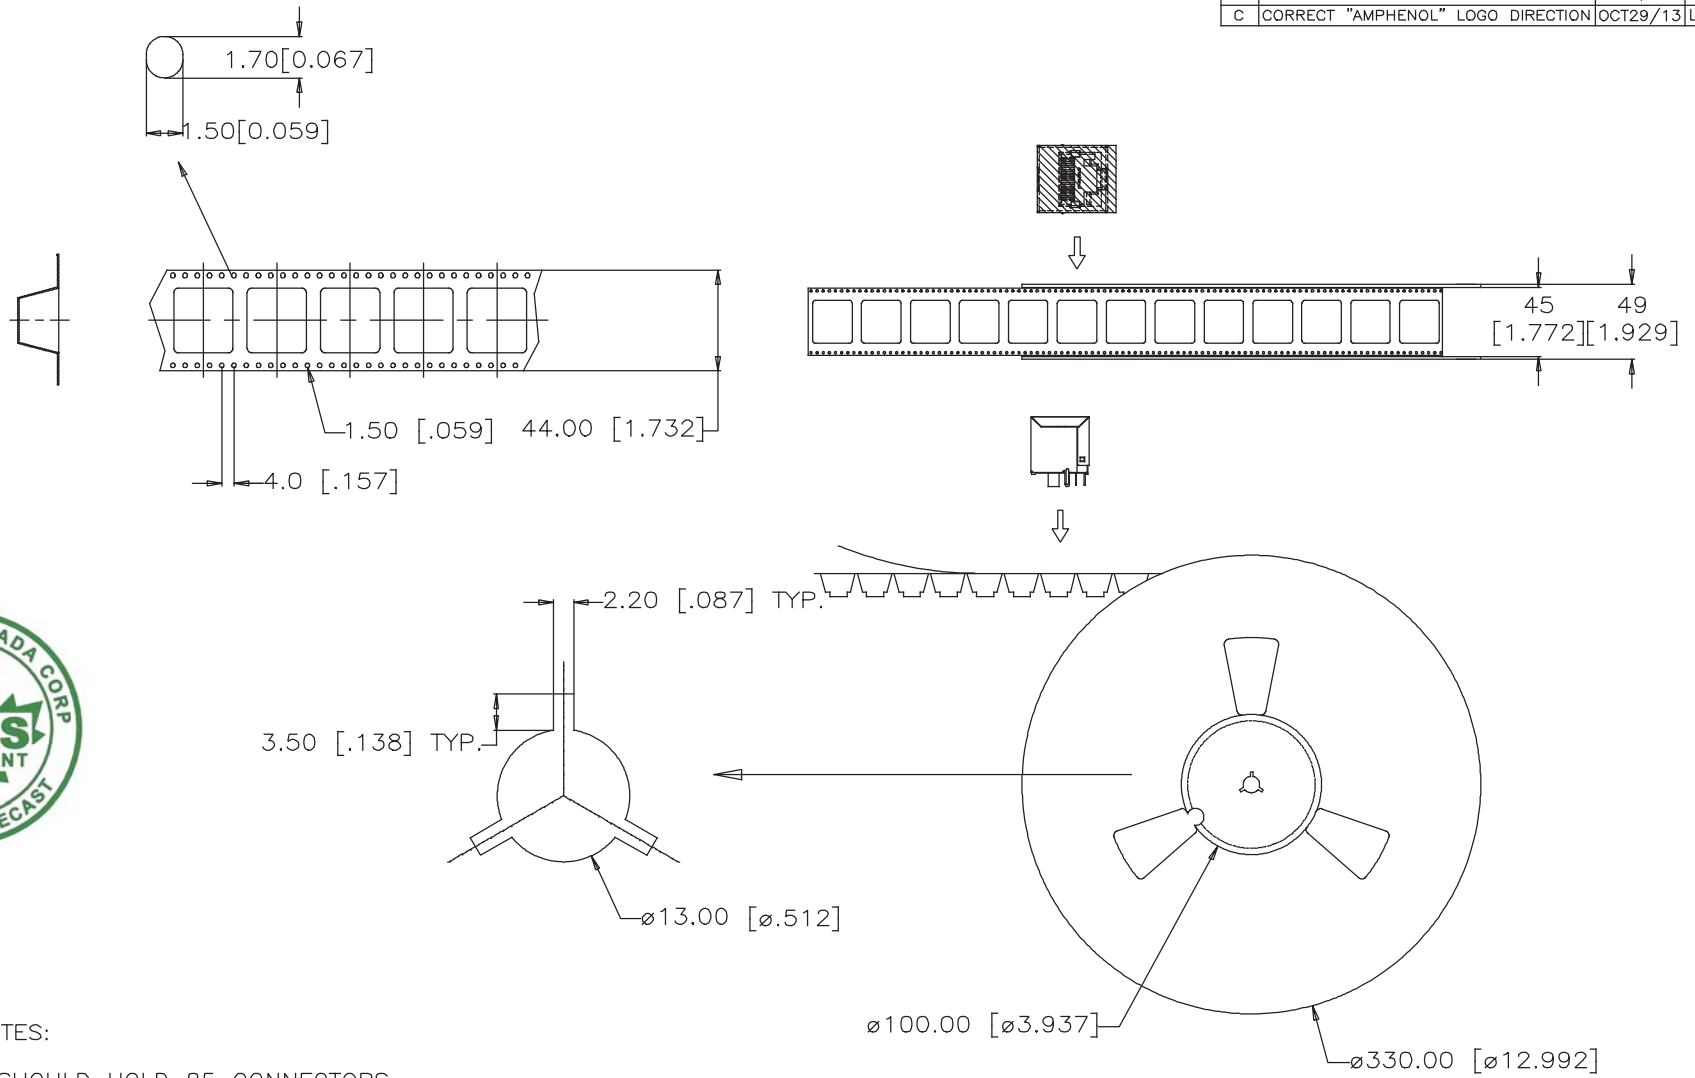

PACKAGING NOTES:

1. ONE REEL SHOULD HOLD 85 CONNECTORS.
2. 10 EMPTY CAVITIES FOR BOTH TOP AND BOTTOM OF THE CARRIER.
3. A FULLY LOADED CARTON SHOULD CONTAIN 5 REELS (425 PCS) OF CONNECTOR.

UNLESS SPECIFIED OTHERWISE	DRAWN B.COPPING	JUN15/12	Amphenol Canada Corp.	
PRIMARY UNITS MILLIMETERS	CHECKED		www.amphenolcanada.com	
SECONDARY INCHES	M.E. APP'D		MODULAR JACK, POSITION & CONTACT OPTION, WITH SHIELD OPTION, KAPTON TAPE OPTION, WITH KEYING FEATURE—RoHS COMPLIANT	
REFERENCE IN PARENTHESES	Q.A. APP'D			
	DWG APP'D A.GREEN	JUN15/12	DWG NO.	P-RJE74-1XX-XX11-X
	ENG. REL. NO.			REV C
	REF.			
	THIRD ANGLE PROJECTION			
			CODE ID NO. 03554	DWG SIZE
			SCALE	SHEET 2 OF 2