




REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	SEP10/14	L.CHAN

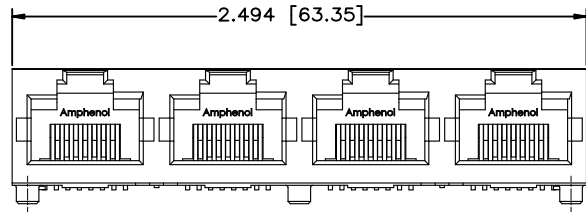

FRONT VIEW

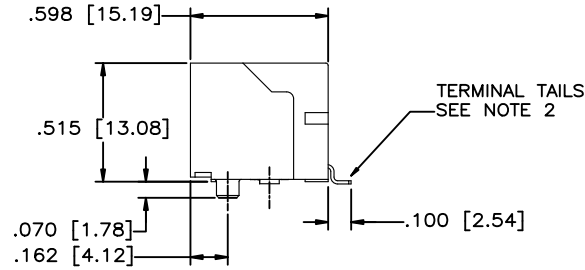

SIDE VIEW

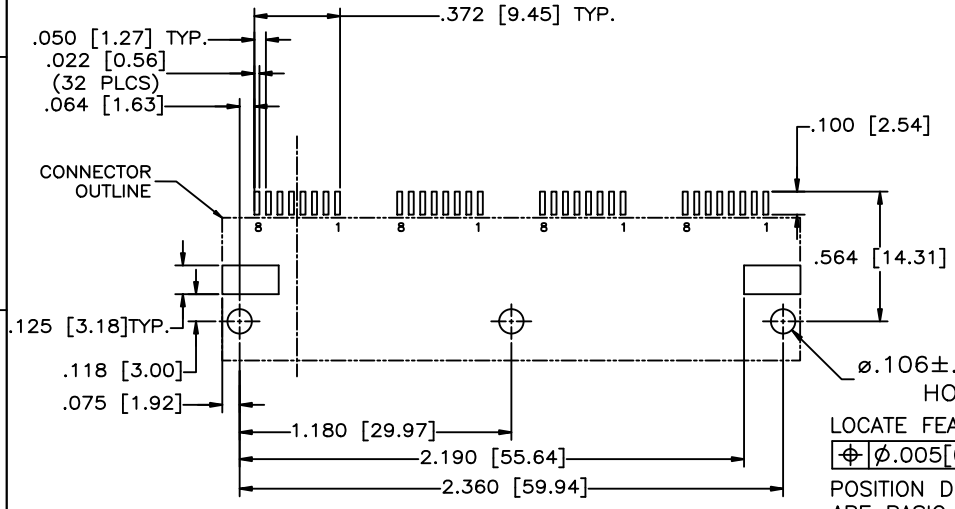


RECOMMENDED P.C.B. LAYOUT
(COMPONENT SIDE OF BOARD)

1. MATERIALS:
 PLASTIC HOUSING: HIGH TEMPERATURE THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0,
 COLOUR: BLACK
- CONTACTS:
 PHOSPHOR BRONZE
 PLATING: 20 μ" [0.5 MICRONS]
 MIN. GOLD ON MATING SURFACES.
 50 μ" [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE.
 100 μ" [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

SOLDER TAB: COPPER ALLOY WITH TIN PLATING.

2. COPLANARITY SPECIFICATION:
 WITH THE MODULART JACK SITTING ON A LEVEL
 SURFACE, THE MAXIMUM GAP BETWEEN THE LEVEL
 SURFACE AND ALL TERMINAL TAILS AND BOTH FITTING
 NAILS IS .004[0.10].

PART NUMBER: RJ SSE-5080-04

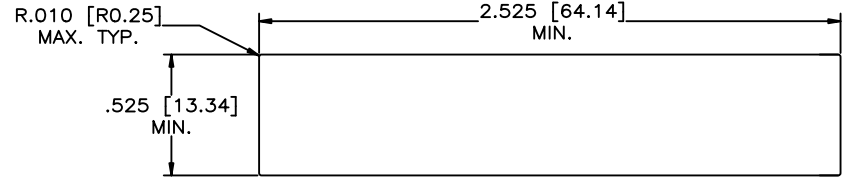

RECOMMENDED PANEL CUTOUT

UNLESS SPECIFIED OTHERWISE		DRAWN AMY.Z	DATE SEP10/14	Amphenol Canada Corp. www.amphenolcanada.com
PRIMARY UNITS INCH	CHECKED L.CHAN			
SECONDARY MILLIMETER	M.E. APP'D			TITLE
REFERENCE IN PARENTHESES	Q.A. APP'D			4 PORT SURFACE MOUNT JACK 8P8C WITH HOLD DOWN BRACKETS, W/O SHIELD-RoHS COMPLIANT
GENERAL TOLERANCES	DWG APPR.			DWG. NO.
1 DECIMAL PLACE ±0.025	ENG. REL. NO.			P-RJSSE-5080-04
2 DECIMAL PLACES ±0.020	REF.			REV A
3 DECIMAL PLACES ±0.015	THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING
ANGULAR DEGREES ±1.0°				CODE ID NO. 03554 DWG SIZE: C SCALE: N/A SHEET 1 OF 1

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE DISCLOSED TO OTHERS FOR ANY PURPOSE OR USED FOR MANUFACTURING PURPOSES WITHOUT WRITTEN PERMISSION FROM AMPHENOL CANADA CORP.