


Product Details for SSFR90P

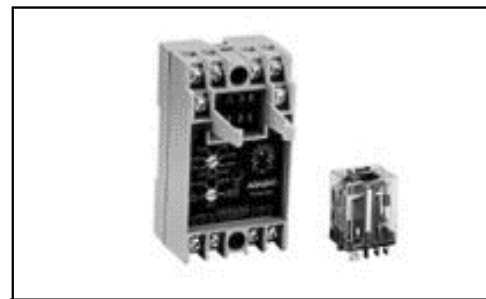

SSFR90P

Tyco Part Number:
1423167-6

[Active](#)

Time Delay Relays

[Not ELV or RoHS Compliant](#)

Product Highlights:

- ? SSF Universal Timer Series
- ? Time Delay Relay
- ? Input Voltage = 125 VDC
- ? Contact Arrangement = 2 Form C, DPDT, 2 C/O
- ? Contact Rating = 10A Resistive @ 28 VDC/120 VAC

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us](#)
- [About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? None Available

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

Product Features

(Please use the Product Drawing for all design activity)

Product Type Features:

- ? Product Type = Time Delay Relay
- ? Termination Type = Screw Terminal

Electrical Characteristics:

- ? Input Voltage (VDC) = 125
- ? Contact Rating = 10A Resistive @ 28 VDC/120 VAC

Body Related Features:

- ? [Series](#) = SSF Universal Timer

Contact Related Features:

- ? Mounting Options = DIN Rail, Machine Tool Track Mounting, Surface
- ? Mode of Operation = Interval, Latching Interval, Off-Delay, On-Delay
- ? Delay Time = 0.1 seconds to 3 seconds, 0.33 seconds to 10 seconds, 0.33 minutes to 10 minutes, 0.33 hours to 10 hours, 1 minute to 30 minutes, 1 second to 30 seconds, 2 minutes to 60 minutes, 4 seconds to 120 seconds
- ? Type of Control = Screw
- ? Repeatability, Max. = $\pm 1\% \pm 10$ msec
- ? Approved Standards = CE Approved, CSA Certified, UL Recognized
- ? Approx. Dimensions (L x W x H) (mm [in]) = 56.00 x 68.00 x 97.00 [2.206 x 2.679 x 3.821]

Configuration Related Features:

- ? [Contact Arrangement](#) = 2 Form C, DPDT, 2 C/O
- ? Multiple Timing Ranges = Without

Industry Standards:

- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Not suitable for lead free processing

Conditions for Usage:

- ? Temperature Range (°C) = -30 – +65

Other:

- ? Brand = Agastat