


MPR20A4R7J Product Details

[Live Product Chat](#)

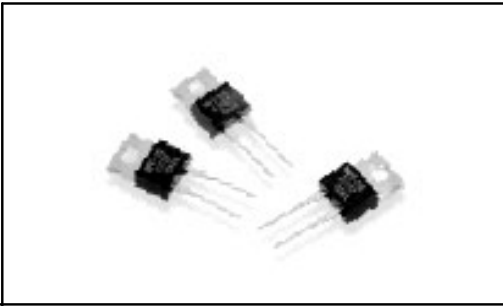

MPR20A4R7J
(1623809-4)

TE Internal Number: 1623809-4

[Active](#)

Fixed Resistors

[Converted to EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Resistor Type = Power Resistor
- Resistance Selection = <1K ?
- Resistance = 4.7 ?
- Power Rating = 20.00 W
- Tolerance = 5 %

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

[Add to My Part List](#) [Request Sample](#) [Find Similar Products](#) [Buy Product](#)

Documentation & Additional Information

<p>Product Drawings:</p> <ul style="list-style-type: none"> • None Available <p>Catalog Pages/Data Sheets:</p> <ul style="list-style-type: none"> • Radial Leaded High Power Resistors - Type MPR Series... (PDF, English) <p>Product Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Application Specifications:</p> <ul style="list-style-type: none"> • None Available <p>Instruction Sheets:</p> <ul style="list-style-type: none"> • None Available <p>CAD Files:</p> <ul style="list-style-type: none"> • None Available 	<p>Additional Information:</p> <ul style="list-style-type: none"> • Product Line Information <p>Related Products:</p> <ul style="list-style-type: none"> • Tooling
---	--

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

<p>Product Type Features:</p> <ul style="list-style-type: none"> • Resistor Type = Power Resistor • Resistance (?) = 4.7 • Element = Thin Film • Termination Type = Tinned Copper Leads <p>Electrical Characteristics:</p> <ul style="list-style-type: none"> • Resistance Selection (?) = <1K • Power Rating (W) = 20.00 • Tolerance (%) = 5 • Package Type = Loose Piece - Bag <p>Body Related Features:</p> <ul style="list-style-type: none"> • Series = MPR • Mount Style = Radial Leaded • Packaging Style = TO220 • Package, Component Size = 10.6 x 19 	<p>Industry Standards:</p> <ul style="list-style-type: none"> • RoHS/ELV Compliance = RoHS compliant, ELV compliant • Lead Free Solder Processes = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C • RoHS/ELV Compliance History = Converted to comply with RoHS directive <p>Conditions for Usage:</p> <ul style="list-style-type: none"> • Temperature Coefficient (ppm/°C) = ?100 <p>Operation/Application:</p> <ul style="list-style-type: none"> • Application = High Power <p>Other:</p> <ul style="list-style-type: none"> • Brand = CGS
--	--

[Provide Website Feedback](#) | [Need Help?](#)