

## TSS21PG1PC Product Details


### Have a Question?

Chat with a Product Information Specialist



### Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

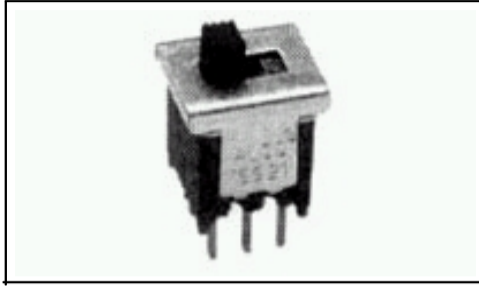

**TSS21PG1PC**

TE Internal Number: 2 - 1437579 - 1

 [Active](#)

### Slide Switches

[Not EU RoHS or ELV Compliant](#) ( [Find RoHS Compliant Alternates](#) )

#### Product Highlights:

- ? 2 Positions
- ? Double Pole - Double Throw Configuration (Pole - Throw)
- ? Actuator Style = Extended, Side, Top
- ? Actuator Color = Black
- ? TSS Series

[View all Features](#)

[Add to My Part List](#) | 
  [Request Sample](#) | 
  [Find Similar Products](#) | 
  [Buy Product](#)

### Documentation & Additional Information

#### Product Drawings:

- ? [SLIDE SWITCH](#) (PDF, English)

#### Catalog Pages/Data Sheets:

- ? [ALCOSWITCH PRODUCTS](#) (PDF, English)

#### Product Specifications:

- ? None Available

#### Application Specifications:

- ? None Available

#### Instruction Sheets:

- ? None Available

#### CAD Files:

- ? None Available

#### Additional Information:

- ? [Product Line Information](#)

#### Related Products:

- ? [Tooling](#)

[List all Documents](#)

### Product Features (Please use the Product Drawing for all design activity)

#### Product Type Features:

- ? Configuration (Pole - Throw) = Double Pole - Double Throw
- ? Actuator Style = Extended, Side, Top
- ? Mount Angle = Vertical
- ? Terminal Configuration = Standard
- ? Termination Type = PC

#### Electrical Characteristics:

- ? Contact Rating = 0.4 VA max @ 20 VDC or peak AC

#### Body Related Features:

- ? [Number of Positions](#) = 2
- ? Actuator Color = Black
- ? Series = TSS
- ? Mount Style = Through -Hole
- ? PCB Tail Length (mm [in]) = 3.30 [0.130]
- ? Actuator Material = Polyester

#### Contact Related Features:

- ? Contact Plating = Gold
- ? Contact Base Material = Copper

#### Housing Related Features:

- ? UL Flammability Rating = UL 94V -0

#### Configuration Related Features:

- ? Operating Function = On Off On
- ? Number of Actuators = Single

#### Industry Standards:

- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C

#### Identification Marking:

- ? Stamped Marking = With

#### Other:

- ? Brand = Alcoswitch

### Corporate Information

- [Who We Are](#)
- [Investors](#)
- [News Room](#)
- [Supplier Portal](#)
- [Careers](#)

### Quick Links

- [Check Distributor Inventory](#)
- [Cross Reference](#)
- [Find Documents & Drawings](#)
- [Product Compliance Support Center](#)
- [Site Map](#)

### Customer Support

- [Email or Chat with Us](#)
- [Find a Phone Number](#)
- [Search Knowledge Base](#)
- [Manage Your Account](#)

### Sign up for our eNewsletter

Enter your email address

### Follow Us On:



Visit Us On:

