


3 - 1571552 -5 Product Details

Live Product Chat US Only
8:30am - 5pm ET, Mon - Fri

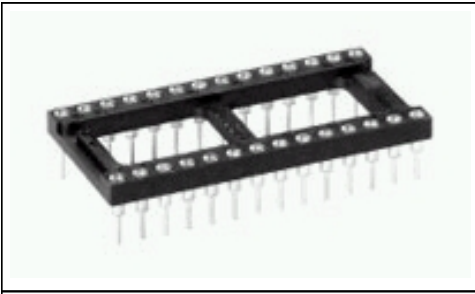

3 - 1571552 -5
(864 -AG11D -ESL- LF)
✔ [Active](#)

DIP Sockets

[Always EU RoHS/ELV Compliant](#) ([Statement of Compliance](#))

Product Highlights:

- ? DIP Socket
- ? Number of Positions = 64
- ? Row-to -Row Spacing = 22.85 mm
- ? Thru Hole
- ? Mount Style = Vertical

[View all Features](#) | [Find Similar Products](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [OPEN FRAME DIP. ECONOMY \(STAMPED CONTACT\) \(REF AUGA...](#)
(PDF, English)

Catalog Pages/Data Sheets:

- ? None Available

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files: ([CAD Format & Compression Information](#))

- ? [2D Drawing](#) (DXF, Version E2)
- ? [3D Model](#) (IGES, Version E2)
- ? [3D Model](#) (STEP, Version E2)

[List all Documents](#)

Additional Information:

- ? [Product Line Information](#)

Additional Product Images:

- ? [Product Photo](#)

Related Products:

- ? [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Product Type](#) = DIP Socket
- ? [Number of Positions](#) = 64
- ? [Profile](#) = Zero
- ? [Frame Style](#) = Open
- ? [Leg Style](#) = Straight
- ? [Sleeve Finish](#) = Tin

Electrical Characteristics:

- ? [Contact Resistance \(m?\)](#) = 10
- ? [Contact Rating](#) = 3A

Termination Related Features:

- ? [Termination \(Solder\) Post Length \(mm \[in\]\)](#) = 3.18 [0.125]

Body Related Features:

- ? [Row-to -Row Spacing \(mm \[in\]\)](#) = 22.85 [0.900]
- ? [Mount Style](#) = Vertical
- ? [Centerline \(mm \[in\]\)](#) = 2.54 [0.100]
- ? [Length \(mm \[in\]\)](#) = 81.28 [3.200]

Contact Related Features:

- ? [Contact Mount](#) = Thru Hole
- ? [Contact Material](#) = Beryllium Copper
- ? [Contact Mating Area Plating Material](#) = Gold
- ? [Contact Style](#) = Screw Machine
- ? [Mating Contact Type](#) = Four -Fingered

Housing Related Features:

- ? [Number of Patterns Per Reel](#) = 1

Configuration Related Features:

- ? [Height Above PC Board \(mm \[in\]\)](#) = 4.57 [0.180]

Industry Standards:

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- ? [RoHS/ELV Compliance History](#) = Always was RoHS compliant

Conditions for Usage:

- ? [Temperature Range \(°C\)](#) = -55 - +105

Packaging Related Features:

- ? [Packaging Method](#) = Reel

Other:

- ? [Brand](#) = Tyco Electronics