


REV. 0
DCO 150555

@ 25°C
 INPUT CURRENT _____ 10 mA PLUS LOAD CURRENT
 INPUT VOLTAGE _____ 18-31 VDC
 TIME DELAY _____ TIME DELAY-ON-OPERATE 5 ± .05 SEC

ENVIRONMENT:
 VIBRATION _____ 10 Hz TO _____ 2000 Hz @ _____ 20 g's
 SHOCK _____ 50 g's _____ 11 MS. DURATION
 TEMPERATURE _____ -55 °C TO _____ 125 °C
 NOTES: _____ DIELECTRIC STRENGTH: 500 VAC 60 CPS
 RECYCLE TIME 10 MS
 RECYCLE TIME 20 MS

CUSTOMER DATA SHEET

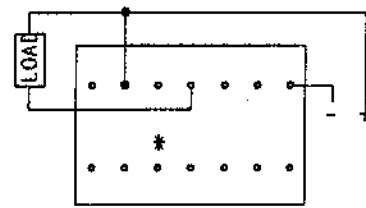

TERMINAL VIEW

OUTPUT RATING: _____ 28 VDC
 _____ 1,000,000 OPERATIONS
 SPST-NO 300 mA (25°C) . 280 mA (85°C)
 100 mA MAX (125°C) SATURATION VOLTAGE 2.5 VDC MAX

DR. PBB 7/13/01 CK. 7/16/01 JPB



CUST. _____ CII STD
 CUST. NO. _____ REV. _____

6150 RELAY

6150-5001