




# 891 Series LED

## 5 1/4" WAYSIDE SIGNAL LAMP MODULE

With Rear LED Indicator and AREMA Terminal Block

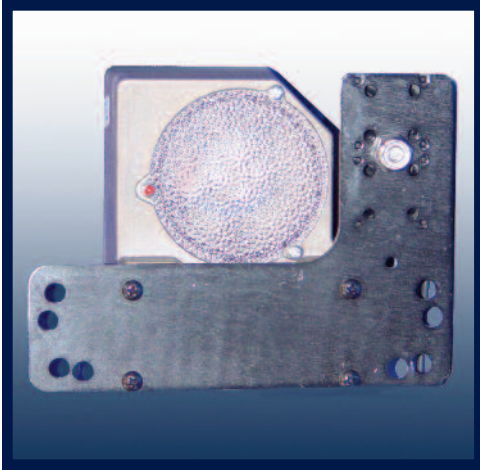


### FEATURES / BENEFITS

- ▲ Features hi-flux LEDs to simulate point light source for enhanced optical performance
  - Faster on/off response time than incandescent lamps improves safety
  - Flicker resistance & reduced current draw
  - 5+ year life reduces maintenance costs
  - Redundant LED circuits (single LED failure does not turn off lamp)
- ▲ Prevents sun phantom effects by eliminating use of colored inner filter lenses
- ▲ Designed to fit Safetran, US&S, GRS, and other 5 1/4 inch diameter transit wayside signal heads
- ▲ 120 volt AC versions
- ▲ Uses existing signal head outer lens
- ▲ Power factor correction & reduced THD
- ▲ Certified for rail environment
- ▲ Rear indicator for use by maintenance crew
- ▲ AREMA Class A Compliant

### APPLICATION

▲ The 891 Series LED Wayside Signal Lamp Modules were developed by Dialight specifically for use in transit railroad, 5 1/4" signals in retrofit applications where replacement of existing incandescent light bulbs is desired. This installation approach provides all the benefits of LEDs without the complex retrofit of the entire lens and housing assemblies. Installation is nearly as simple as replacement of the incandescent bulb. Dialight lamp modules have been fully qualified for the Rail environment and incorporate power factor correction and total harmonic distortion reduction circuitry.

**Mechanical Dimensions in inches and (millimeters)  
Shown with mounting hardware and AREMA terminal**

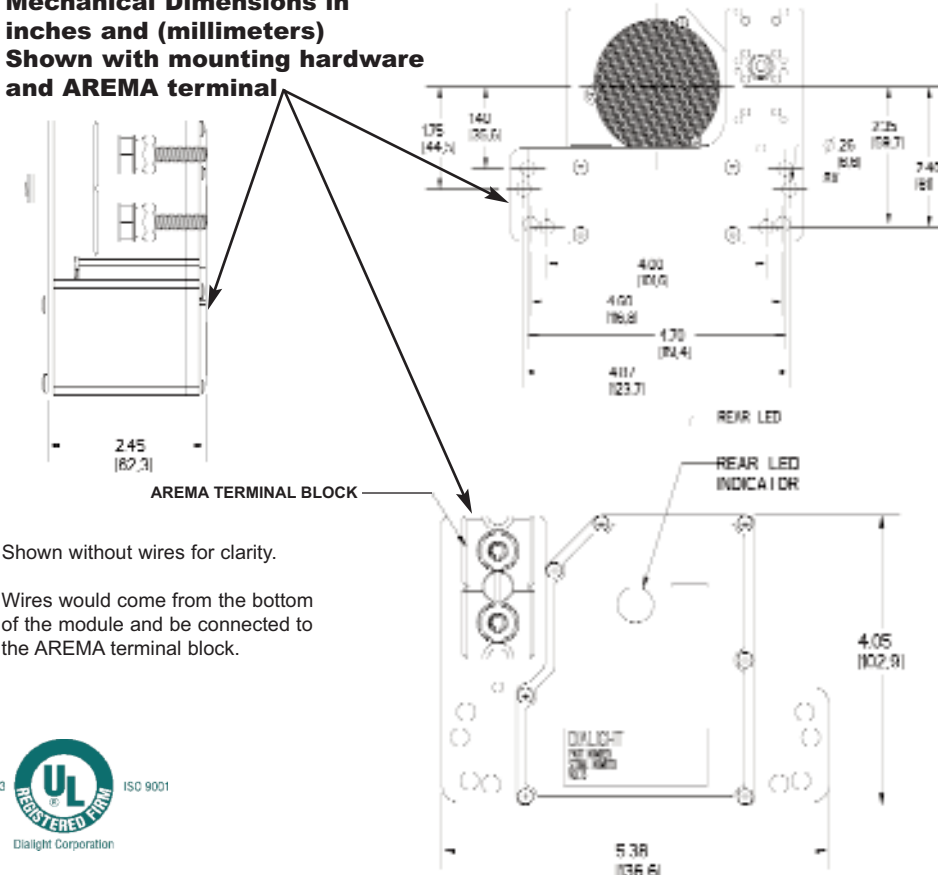

▲ Dialight is the recognized leader in LED applications for transportation signaling, and has worked cooperatively with leading transit rail customers to develop this unique solution to wayside signal applications for LEDs. It is proven to be a preferred product over traditional 5mm LED distributed array solutions.

Shown without wires for clarity.  
Wires would come from the bottom of the module and be connected to the AREMA terminal block.





# 891 Series LED 5 1/4" Wayside Signal Lamp Module

With Rear LED Indicator and AREMA Terminal Block

## ELECTRICAL CHARACTERISTICS @ 25°C

Part Number	Color	Description	Operating Voltage
891-1G02-111-RA-001	Green	Ring lug, 12" leads, with hardware	120 VAC
891-1R02-111-RA-001	Red	Ring lug, 12" leads, with hardware	120 VAC
891-1Y02-111-RA-001	Yellow	Ring lug, 12" leads, with hardware	120 VAC
891-1W02-111-RA-001	Lunar	Ring lug, 12" leads, with hardware	120 VAC

## OPTICAL PERFORMANCE @ 25°C

Part Number	Description	Minimum Initial Light Output		Typical Initial Light Output		Beam Angles*
		On-axis* Intensity (cd)	Luminous flux (lm)	On-axis* Intensity (cd)	Luminous flux (lm)	
891-1R02-111-RA-001	Red Wayside Signal	110	22	190	36	20°Hx20°V
891-1Y02-111-RA-001	Yellow Wayside Signal	110	22	165	30	20°Hx20°V
891-1G02-111-RA-001	Green Wayside Signal	85	20	120	28	20°Hx20°V
891-1W02-111-RA-001	White Wayside Signal	85	20	120	28	20°Hx20°V

\*Tested with tinted inner and clear outer wayside lenses.



Dialight reserves the right to make changes at any time in order to supply the best product possible. The most current version of this document will always be available at: [www.dialight.com/Assets/Brochures\\_And\\_Catalogs/Illumination/MDTR891X001.pdf](http://www.dialight.com/Assets/Brochures_And_Catalogs/Illumination/MDTR891X001.pdf). Warranty Statement: EXCEPT FOR THE WARRANTY EXPRESSLY PROVIDED FOR [HEREIN/ABOVE/BELOW], DIALIGHT DISCLAIMS ANY AND ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, WITHOUT LIMITATION, ANY WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT