




# IC Sockets

## Dual Row IC Socket

- ❖ Socket accepts IC leads  $\varnothing 0.40$  to  $0.56\text{mm}$ .
- ❖ End and side stackable.
- ❖ Utilizes four finger Beryllium Copper contact technology.
- ❖ Gold finish on contact, with Tin finish on shells/termination.
- ❖ Please consult Technical Drawings online for further specifications.

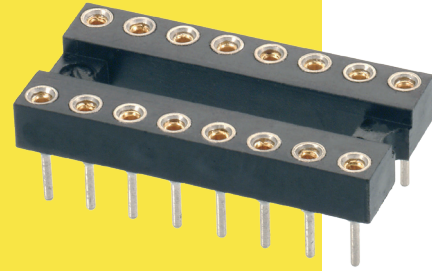

### IC SOCKET

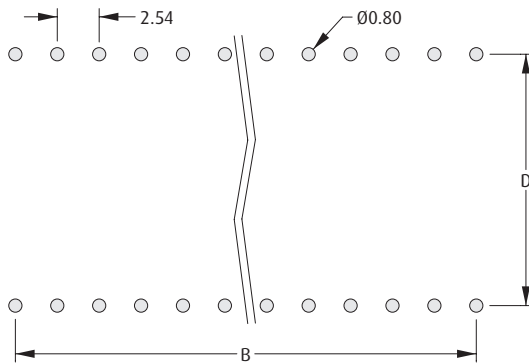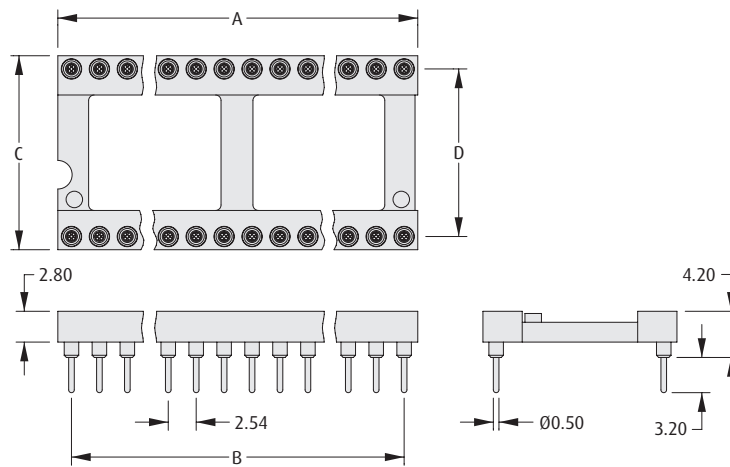

Recommended PC Board Pattern

ORDER CODE	NO. OF CONTACTS	A	B	C	D
D2806-42	6	7.60	5.08	10.02	7.62 (0.3")
D2808-42	8	10.10	7.62	10.02	7.62 (0.3")
D2814-42	14	17.70	15.24	10.02	7.62 (0.3")
D2816-42	16	20.30	17.78	10.02	7.62 (0.3")
D2818-42	18	22.80	20.32	10.02	7.62 (0.3")
D2820-42	20	25.30	22.86	10.02	7.62 (0.3")
D2922-42	22	27.80	25.40	10.02	7.62 (0.3")
D2822-42	22	27.80	25.40	12.60	10.16 (0.4")
D2924-42	24	30.40	27.94	10.02	7.62 (0.3")
D2724-42	24	30.40	27.94	12.60	10.16 (0.4")
D2824-42	24	30.40	27.94	17.64	15.24 (0.6")
D2928-42	28	35.50	33.02	10.02	7.62 (0.3")
D2828-42	28	35.50	33.02	17.64	15.24 (0.6")
D2832-42	32	40.60	38.10	17.64	15.24 (0.6")
D2840-42	40	50.80	48.26	17.64	15.24 (0.6")
D2948-42	48	60.90	58.42	17.64	15.24 (0.6")
D2864-42	64	81.20	78.74	25.40	22.86 (0.9")

All dimensions in mm.