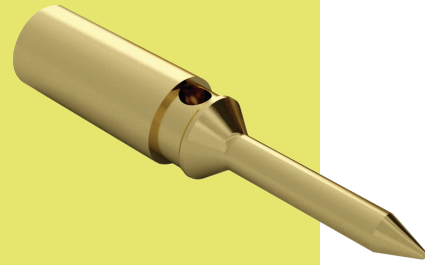


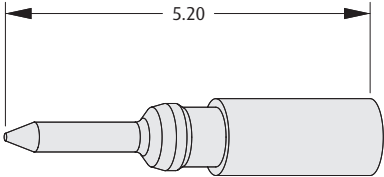
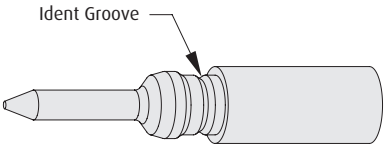

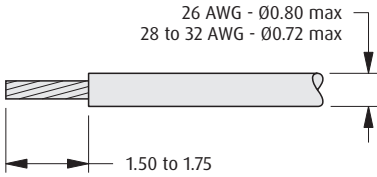
# Gecko with Latches Connectors

## Male Crimp Contacts

- ❖ Crimp barrel meets all crimp guidelines and standards.
- ❖ 2A current capacity, resists high vibration and shock.
- ❖ Withstands extremes of temperature: -65°C to +150°C.
- ❖ Instruction video online at [www.harwin.com/harwintv](http://www.harwin.com/harwintv).
- ❖ Dummy Contact can be used for additional polarization of keying of multiple connectors. Also called Blanking Plug.



GEEKO WITH LATCHES

CONTACTS	DUMMY CONTACT										
<p><b>26 AWG</b></p>  <p><b>28 - 32 AWG</b></p> 	 <p><b>WIRE STRIPPING DETAILS</b></p> 										
TOOLS											
<p><b>Recommended Crimp Tool</b> - Z125-900</p> <p><b>Positioner</b> - Z125-901</p> <p><b>Contact Insertion/Removal Tool</b> - Z125-902</p>	<ul style="list-style-type: none"> <li>❖ Male crimp housing shown on previous page.</li> <li>❖ Pre-cable contacts shown on following page.</li> <li>❖ Instruction sheets available at <a href="http://www.harwin.com/instructions">www.harwin.com/instructions</a>.</li> </ul>										
HOW TO ORDER											
<p style="text-align: center;"><b>G125 - XXX 00 05</b></p> <div style="display: flex; justify-content: space-between;"> <div style="width: 30%;"> <p><b>SERIES CODE</b></p> <table border="1" style="width: 100%;"> <thead> <tr> <th colspan="2">TYPE</th> </tr> </thead> <tbody> <tr> <td><b>101</b></td> <td>Male 26 AWG crimp contact</td> </tr> <tr> <td><b>102</b></td> <td>Male 28-32 AWG crimp contact</td> </tr> <tr> <td><b>020</b></td> <td>Dummy Contact (blanking plug)</td> </tr> </tbody> </table> </div> <div style="width: 30%; text-align: center;"> <p><b>FINISH</b></p> <table border="1" style="width: 100%;"> <tbody> <tr> <td><b>05</b></td> <td>Gold</td> </tr> </tbody> </table> </div> </div>		TYPE		<b>101</b>	Male 26 AWG crimp contact	<b>102</b>	Male 28-32 AWG crimp contact	<b>020</b>	Dummy Contact (blanking plug)	<b>05</b>	Gold
TYPE											
<b>101</b>	Male 26 AWG crimp contact										
<b>102</b>	Male 28-32 AWG crimp contact										
<b>020</b>	Dummy Contact (blanking plug)										
<b>05</b>	Gold										

All dimensions in mm.

Patent Published