


Datamate J-Tek Connectors

Female Crimp Kit

- ❖ Part numbers are for a complete kit of a housing and the applicable number of contacts.
- ❖ Jackscrews are assembled where specified.
- ❖ Crimp contacts are rear insertable.
- ❖ Version also available for 28 – 32 AWG cable – see the following page.
- ❖ Spare contacts are available.

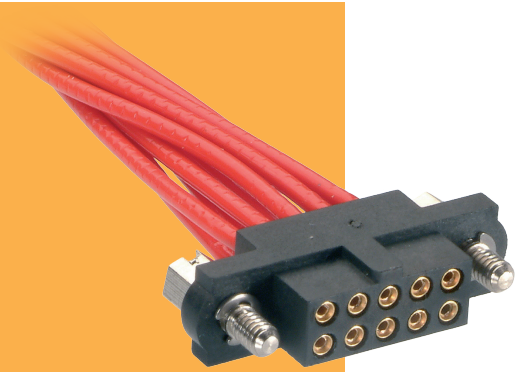

DATAMATE J-TEK

WITHOUT JACKSCREWS		WITH JACKSCREWS																	
		<table border="1"> <thead> <tr> <th colspan="2">CALCULATION</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>B + 12</td> </tr> <tr> <td>B</td> <td>Total no. of contacts - 2</td> </tr> <tr> <td>C</td> <td>B + 7</td> </tr> </tbody> </table>		CALCULATION		A	B + 12	B	Total no. of contacts - 2	C	B + 7								
CALCULATION																			
A	B + 12																		
B	Total no. of contacts - 2																		
C	B + 7																		
		<p>Hex Slotted Jackscrew Hex Socket Jackscrew</p>																	
TOOLS		WIRE STRIPPING DETAILS																	
<p>Recommended Crimp Tool – M22520/2-01 Positioner – T5747 Contact Insertion/Removal Tool – Z80-280</p> <ul style="list-style-type: none"> ❖ Spare and pre-cabled contacts shown on following pages. ❖ Instruction sheets available at www.harwin.com/instructions. 																			
HOW TO ORDER																			
<p>M80 - 4XX XX XX</p>																			
<table border="1"> <thead> <tr> <th colspan="2">SERIES CODE</th> </tr> </thead> <tbody> <tr> <th>LARGE BORE (22 AWG)</th> <th>SMALL BORE (24-28 AWG)</th> </tr> <tr> <td>470</td> <td>471</td> </tr> <tr> <td>460</td> <td>461</td> </tr> <tr> <td>480</td> <td>481</td> </tr> </tbody> </table>		SERIES CODE		LARGE BORE (22 AWG)	SMALL BORE (24-28 AWG)	470	471	460	461	480	481	<table border="1"> <thead> <tr> <th colspan="2">FINISH</th> </tr> </thead> <tbody> <tr> <td>05</td> <td>Gold</td> </tr> <tr> <td>42</td> <td>Gold + Tin</td> </tr> </tbody> </table>		FINISH		05	Gold	42	Gold + Tin
SERIES CODE																			
LARGE BORE (22 AWG)	SMALL BORE (24-28 AWG)																		
470	471																		
460	461																		
480	481																		
FINISH																			
05	Gold																		
42	Gold + Tin																		
<table border="1"> <thead> <tr> <th>LARGE BORE (22 AWG)</th> <th>SMALL BORE (24-28 AWG)</th> <th></th> </tr> </thead> <tbody> <tr> <td>470</td> <td>471</td> <td>Without Jackscrews</td> </tr> <tr> <td>460</td> <td>461</td> <td>With Hex Slotted Jackscrews</td> </tr> <tr> <td>480</td> <td>481</td> <td>With Hex Socket Jackscrews</td> </tr> </tbody> </table>		LARGE BORE (22 AWG)	SMALL BORE (24-28 AWG)		470	471	Without Jackscrews	460	461	With Hex Slotted Jackscrews	480	481	With Hex Socket Jackscrews	<table border="1"> <thead> <tr> <th>TOTAL NO. OF CONTACTS</th> </tr> </thead> <tbody> <tr> <td>04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50</td> </tr> </tbody> </table>		TOTAL NO. OF CONTACTS	04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50		
LARGE BORE (22 AWG)	SMALL BORE (24-28 AWG)																		
470	471	Without Jackscrews																	
460	461	With Hex Slotted Jackscrews																	
480	481	With Hex Socket Jackscrews																	
TOTAL NO. OF CONTACTS																			
04, 06, 08, 10, 12, 14, 20, 26, 34, 42, 50																			

All dimensions in mm.