

**MICRO SWITCH**

A DIVISION OF AMHEALPOLIS-HONEYWELL REGULATOR COMPANY  
 FREDERICK, MARYLAND

FED. MFR. CODE 91929

**SWITCH-BASIC**

(M) BZ-RQX66  
 ISSUE 1

**BZ-RQX66**

**M**

DRAWING  
 NUMBER

7

ISSUE

REPLACES

RELEASE NO.

CHECK

57

57


57

57

57


57

57

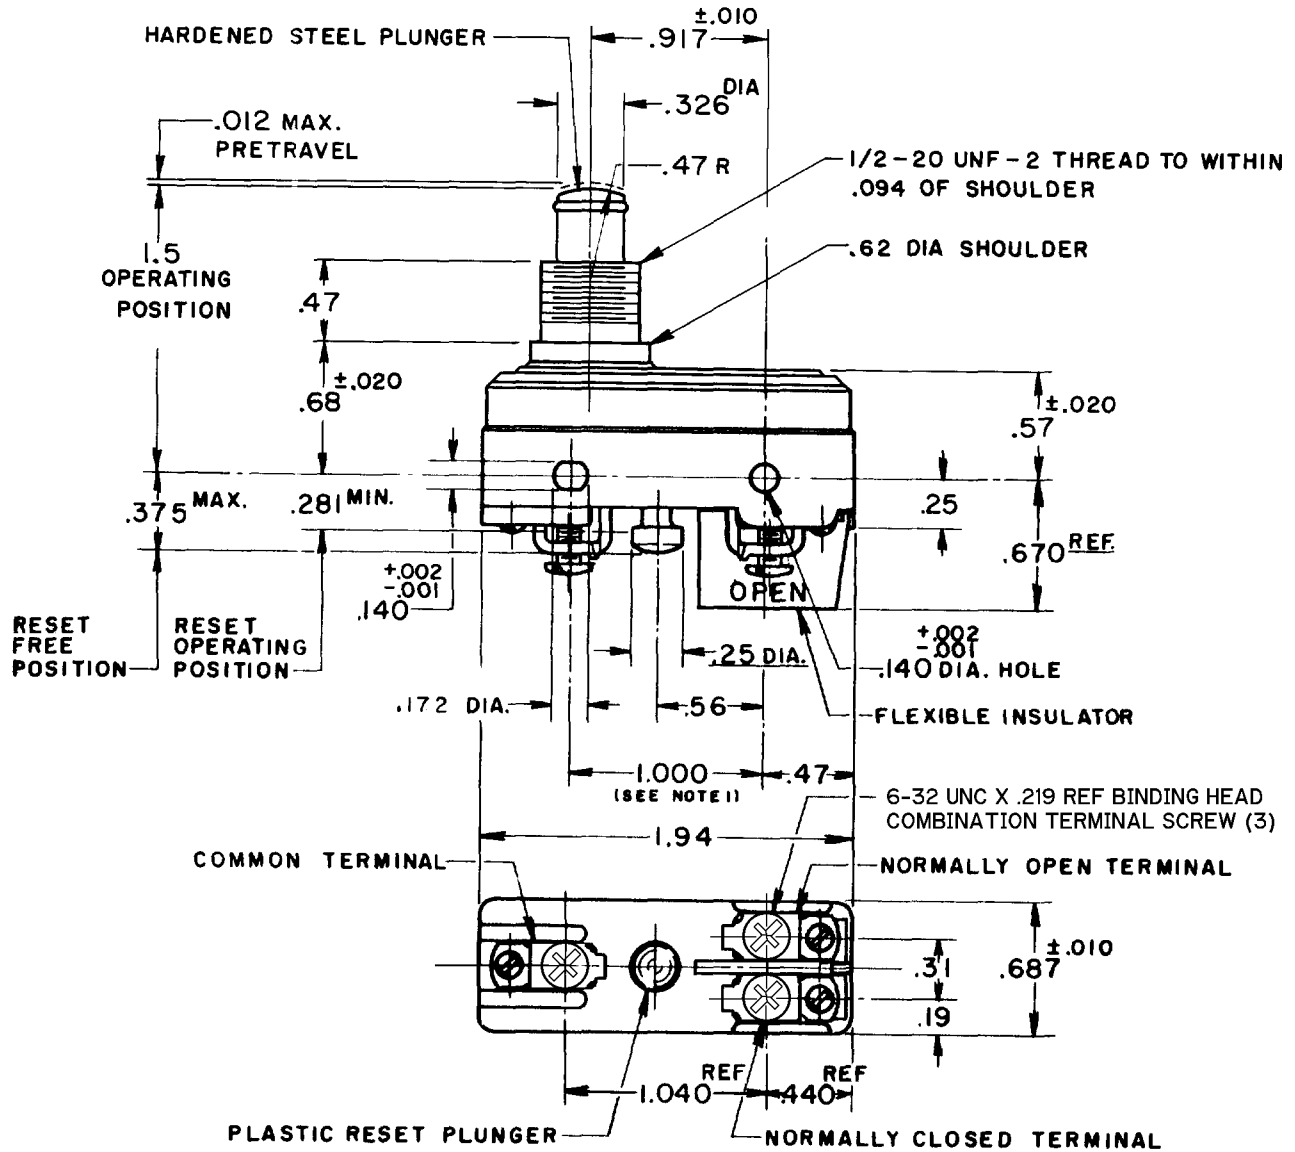

NOTE -  
 1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS  
 OF .139 MAX. DIA. ON 1.000 ±.002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA		SCALE - FULL
OPERATING FORCE ----- 6-9 1/2 OZ.		CONTACT ARRANGEMENT		DO NOT SCALE PRINT
OVERTRAVEL ----- .188 MIN.		SINGLE POLE DOUBLE THROW MAINTAINED CONTACT		
<b>RESET CHARACTERISTICS</b>		BREAK DISTANCE .070 MIN.		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES <b>TOLERANCES ARE:</b>
OPERATING FORCE ----- 2-10 OZ.		UNDERWRITERS LAB. INC. LISTED RATING		
OVERTRAVEL ----- .015 MIN.		15 A-125, 250, OR 480 VAC -L 67- 1/4 HP-125 VAC; 1/2 HP-250 VAC 1/2 A-125 VDC; 1/4 A-250 VDC		
O. M. W.				ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.008 ANGLES ±
DRAWN		WEIGHT		

RASTOR

O. M. W.