


Metalink HDSL recommendations



Midcom

DigitalTelecom

EP13 - SMD

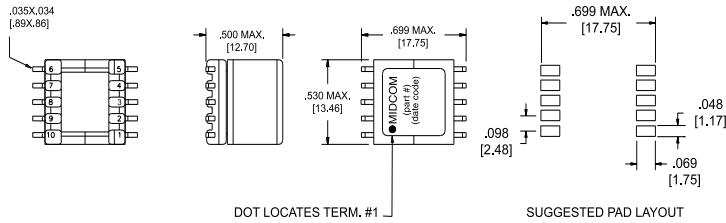

EP13 - TH

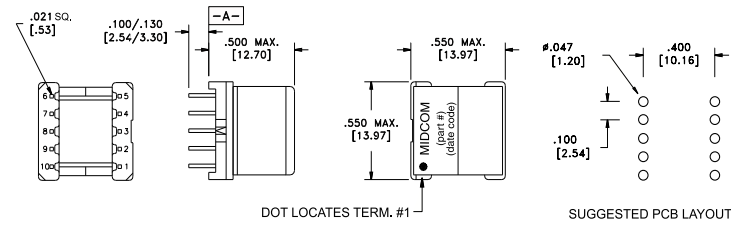

Features

- Compatible with Metalink chip sets
- Good total harmonic distortion characteristics
- Optimized design for size and performance
- Customization available
- Volume production and automated lines
- For IC manufacturer approval status, contact Midcom
- 135 ohm line

Part Number	IC Number	Application	Turns Ratio PRI:SEC	Safety Agency	Mechanicals	Schematic
50693R	MtH2445, Mtxx40B series	Multi rate	2.3:1	IEC950	Surface-mount	1
50681	MtH2445, Mtxx40B series	Multi rate	2.3:1	IEC950	Through-hole	1
50787R	MtH1243	Multi rate	2:1	IEC950	Surface-mount	1
50688	MtH1243	Multi rate	2:1	IEC950	Through-hole	1
51145R	MtS140 AFE	External LineDriver	3:1	IEC950	Surface-mount	1
51058	MtS140 AFE	External LineDriver	3:1	IEC950	Through-hole	1
51180	MtS140 AFE	Direct to AFE	3.7:1	IEC950	Through-hole	1



Midcom, Inc

121 Airport Drive
PO Box 1330
Watertown, SD 57201-6330 USA

www.midcom-inc.com

e-mail: sales@midcom-inc.com
Toll Free (US & Canada) 800.643.2661
Phone 605.886.4385
Fax 605.886.4486