


5.4" [137 mm]




3.7" [95 mm]

The model IT9420 is a rugged yet simple device which provides a 4 to 20 mA current feedback signal for incline position. The heart of the IT9420 is a magnetically-damped pendulum coupled to a conductive plastic precision potentiometer. A highly linear relationship between inclination and a 4 to 20 mA output is maintained over the full range of the IT9420.

The IT9420 is easy to use: simply attach it to the object of measurement and install two wires for the current loop.

Output Signal

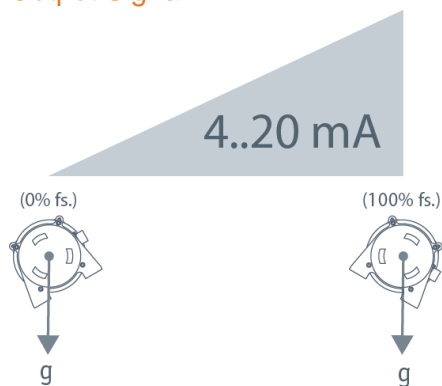

IT9420

Inclinometer • 4..20 mA

Measuring Range Options from 0-45° to 0-240°

Aluminum or Stainless Steel Enclosure Options

Perfect for Water Management/ Tainter Gate Position

IP68 • NEMA 6 Protection • Hazardous Area Certification

General

Available Full Stroke Ranges	0-45 to 0-240 degrees
Weight (aluminum enclosure)	5 lb. typical (aluminum enclosure)
Enclosure Material	aluminum (stainless steel available)
Sensor	precision potentiometer
Electrical Connector	MS3102E-14S-6P
Mating Plug (included)	MS3106E-14S-6S

Electrical

Output Signal	4...20 mA
Input Voltage	see ordering information
Input Current	20 mA max.
Circuit Protection	38 mA maximum

Performance

Sensitivity	16 mA/full stroke, $\pm 0.25\%$
Accuracy*	$\pm 1\%$ full stroke
Accuracy Option	0.5% full stroke (please contact factory)
Resolution	essentially infinite

Full Stroke Ranges of 45° - 105°

Zero Adjustment	from factory set zero to 20% of full stroke range
Span Adjustment	to 20% of factory set span

Full Stroke Ranges of 120° - 240°

Zero Adjustment	from factory set zero to 40% of full stroke range
Span Adjustment	to 40% of factory set span

*—when plane of pendulum motion parallel to plane of rotation within $\pm 3^\circ$


Environmental

Enclosure	NEMA 4/4X/6, IP 67/68
Hazardous Area Certification	see ordering information
Operating Temperature	-30° to 200°F (-34° to 90°C)
Vibration	up to 10 g to 2000 Hz maximum

IT9420

Inclinometer • 4..20 mA

Outline Drawing

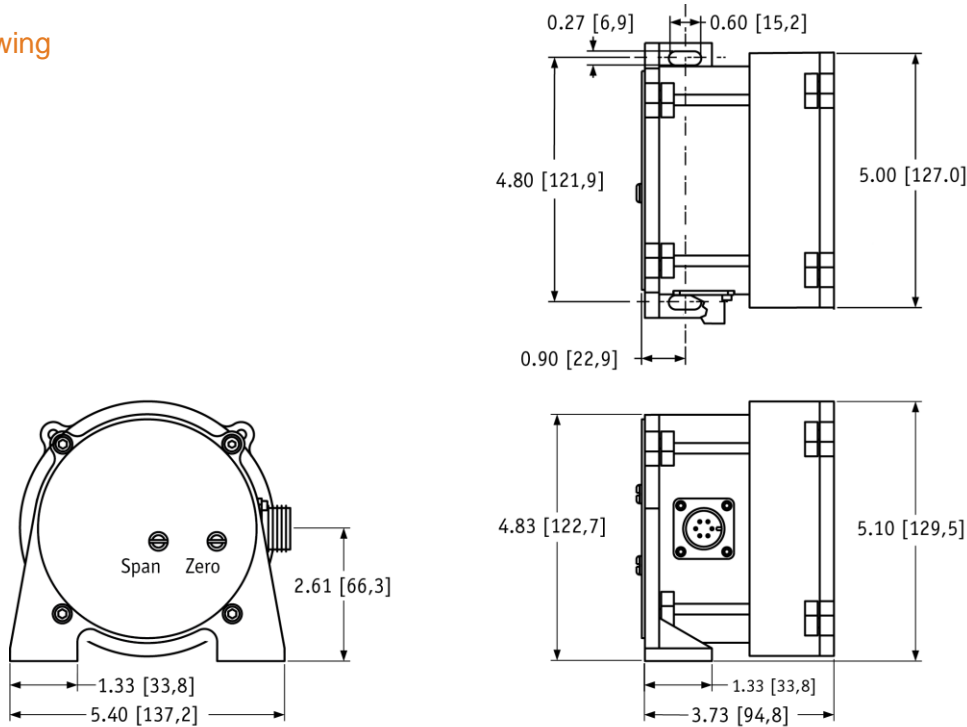

DIMENSIONS ARE IN INCHES [MM]
tolerances are ±0.02 in. [±0,5 mm] unless otherwise noted

Ordering Information

Model Number:

IT9420 - - - - - - - -
order code: **CW** **CCW** **A** **B** **C** **D**


Sample Model Number:

IT9420 - 060 - 120 - 1110

- | | | |
|--|-----------------------------------|-------------------------|
| CW clockwise rotation: | 60° | } total rotation = 180° |
| CCW counter-clockwise rotation: | 120° | |
| A enclosure: | aluminum | |
| B output signal: | 4 mA @ 120° CCW
20 mA @ 60° CW | |
| C electrical connection: | 6-pin plastic connector | |
| D magnetic dampening: | yes | |

Full Clockwise Rotation:


CW order code:	000	015	030	045	060	075	090	105	120
	0°	15°	30°	45°	60°	75°	90°	105°	120°

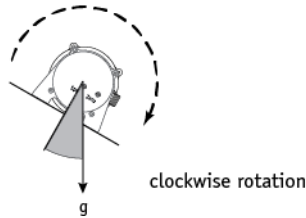

Important--
the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°

Full Counter-Clockwise Rotation:

CCW order code:	000	015	030	045	060	075	090	105	120
	0°	15°	30°	45°	60°	75°	90°	105°	120°

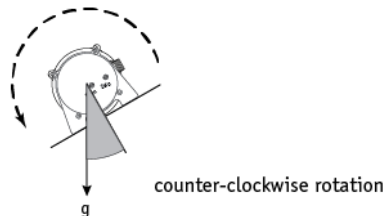

Important--
the sum of the Clockwise and Counter-Clockwise Rotations must be in the range of 45° to 240°

IT9420

Inclinometer • 4...20 mA

Enclosure Material:

A order code:	1	2
	powder-painted aluminum	303 stainless steel

Output Signal:

B order code:	1	2	5	6
output signal options:	4...20 mA	20...4 mA	4...20 mA	20...4 mA

input voltage:	8 – 34 vdc	14 – 32 vdc
----------------	------------	-------------

hazardous area certification:	not certified	CSA Standard 22.2 Class 1 Groups A, B, C and D	Cenelec LCIE EEx ia IIc T4
-------------------------------	---------------	--	----------------------------------

***IMPORTANT:** intrinsically safe when powered from a CSA certified zener barrier rated 28 VDC max, 110 mA max per installation drawing#677984

Electrical Connection:

C order code:	1	2	4																												
	6-pin plastic connector w/mating plug IP 67, NEMA 4X**,6	10-ft. [3 M] waterproof cable IP 67, NEMA 4X**, 6	25-ft. [7.5 M] instrumentation cable IP 67, NEMA 6																												
	1/2 - 5/16" [14 - 8 mm] cable dia. 16 AWG max conductor size connector: MS3102E-14S-6P mating plug: MS3106E-14S-6S	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	25 ft. x 0.2-in. dia. [7,5 M x 5 mm dia.] 24 AWG, shielded																												
C order code:	5	6	7																												
	100-ft. [30 M] waterproof cable IP 67, NEMA 4X**,6	10-ft. [3 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P	100-ft. [30 M] pressure tested* waterproof cable IP 68, NEMA 4X**, 6P																												
	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW	10 ft. x 0.4-in. dia. [3 M x 10 mm dia.] 18 AWG, type SJTW	100 ft. x 0.4-in. dia. [30 M x 10 mm dia.] 18 AWG, type SJTW																												
	6-pin Mating Plug	Waterproof Cable	Instrumentation Cable																												
	<table border="1"> <tr> <th>pin</th> <th>signal</th> </tr> <tr> <td>A</td> <td>8...34 vdc</td> </tr> <tr> <td>B</td> <td>4...20 mA out</td> </tr> <tr> <td>C</td> <td>-</td> </tr> <tr> <td>D</td> <td>case ground</td> </tr> </table> <p style="text-align: center;"><i>contact view</i></p>	pin	signal	A	8...34 vdc	B	4...20 mA out	C	-	D	case ground	<table border="1"> <tr> <th>color code</th> <th>signal</th> </tr> <tr> <td>WHITE</td> <td>8...34 vdc</td> </tr> <tr> <td>BLACK</td> <td>4...20 mA out</td> </tr> <tr> <td>GREEN</td> <td>case ground</td> </tr> </table>	color code	signal	WHITE	8...34 vdc	BLACK	4...20 mA out	GREEN	case ground	<table border="1"> <tr> <th>color code</th> <th>2-wire</th> </tr> <tr> <td>RED</td> <td>8...34 vdc</td> </tr> <tr> <td>BLACK</td> <td>4...20 mA out</td> </tr> <tr> <td>WHITE</td> <td>n/a</td> </tr> <tr> <td>GREEN</td> <td>case ground</td> </tr> </table>	color code	2-wire	RED	8...34 vdc	BLACK	4...20 mA out	WHITE	n/a	GREEN	case ground
pin	signal																														
A	8...34 vdc																														
B	4...20 mA out																														
C	-																														
D	case ground																														
color code	signal																														
WHITE	8...34 vdc																														
BLACK	4...20 mA out																														
GREEN	case ground																														
color code	2-wire																														
RED	8...34 vdc																														
BLACK	4...20 mA out																														
WHITE	n/a																														
GREEN	case ground																														

*--Test pressure: 100 feet [30 meters] H₂O (40 PSID) Test Medium: Air; Duration: 2 hours. **--applies to stainless steel enclosure only.

IT9420

Inclinometer • 4..20 mA


Dampening Option:

① <i>order code:</i>	0	1
	with magnetic dampening	without magnetic dampening

Output Signal Selection:

The output signal direction can be reversed at any time by simply changing the dip-switch settings found on the internal signal board. After the settings have been changed, adjustment of the Zero and Span trimpots will be required to precisely match the 4 mA and 20mA signal values to the beginning and end points of the stroke.

To gain access to the signal board, remove four Allen-Head Screws and remove end cover bracket.

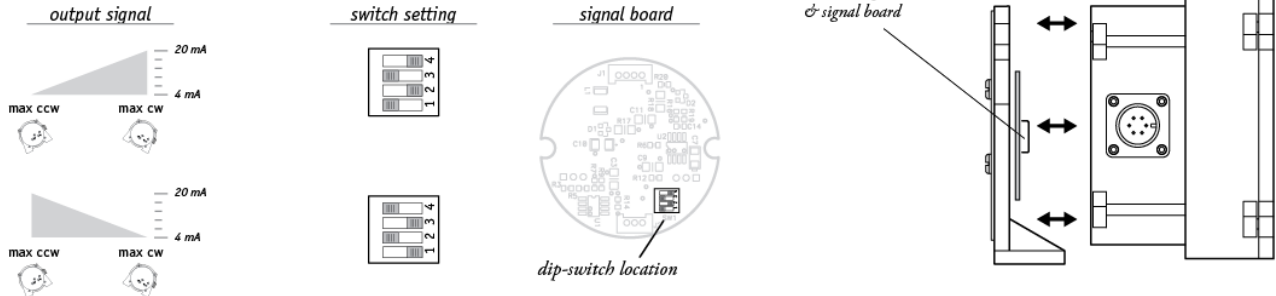

NORTH AMERICA

Measurement Specialties, Inc.,
a TE Connectivity company
Tel: 800-522-6752
Email: customer-care.chtw@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

CH25 12/01/2015