


M20 Connectors

Female Crimp Housings

- Female crimp housing - contacts are ordered separately (shown on following page).
- For polarising key use **order code M20-003**

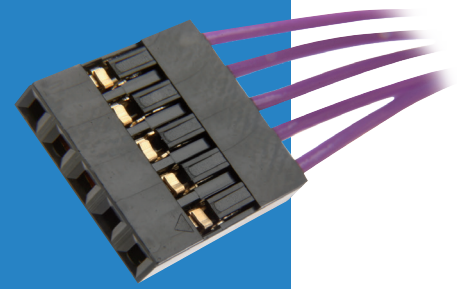

2.54mm (.100") PITCH

SINGLE ROW	CALCULATION	DOUBLE ROW	CALCULATION								
	<table border="1"> <tr> <td style="background-color: #0056b3; color: white;">A</td> <td>$B + 2.74$</td> </tr> <tr> <td style="background-color: #0056b3; color: white;">B</td> <td>$2.54 \times (\text{No. of contacts per row} - 1)$</td> </tr> </table>	A	$B + 2.74$	B	$2.54 \times (\text{No. of contacts per row} - 1)$		<table border="1"> <tr> <td style="background-color: #0056b3; color: white;">A</td> <td>$2.54 \times \text{No. of contacts per row}$</td> </tr> <tr> <td style="background-color: #0056b3; color: white;">B</td> <td>$2.54 \times (\text{No. of contacts per row} - 1)$</td> </tr> </table>	A	$2.54 \times \text{No. of contacts per row}$	B	$2.54 \times (\text{No. of contacts per row} - 1)$
A	$B + 2.74$										
B	$2.54 \times (\text{No. of contacts per row} - 1)$										
A	$2.54 \times \text{No. of contacts per row}$										
B	$2.54 \times (\text{No. of contacts per row} - 1)$										

HOW TO ORDER

M20 - 10 X XX 00

SERIES CODE

TYPE

6	Single Row
7	Double Row

NO. OF CONTACTS PER ROW

02 to 12

All dimensions in mm.