

# Detailed information for: BC6-30-01-P-01

This page contains technical data sheet, documents library and links to offering related to this product. If you require any other information, please contact us using form located at the bottom of the page.

[Print...](#)

[Print to Pdf...](#)

Data Sheet

Documentation

## BC6-30-01-P-01

### General Information

Extended Product Type:BC6-30-01-P-01

Product ID: GJL1213009R0011

EAN: 4013614053276

Catalog Description: BC6-30-01-P-01 Mini Contactor 24VDC

**Long Description:** The BC6-30-01-P mini contactor is a compact 3 pole contactor with 1 auxiliary contact and soldering pins. They are ideally suited for applications where reliability is a must and space is at a premium. Mini contactors are used in residential buildings, commercial buildings and industrial applications for the control of single or three-phase loads up to 4 kW (AC-3) and 20 A / 690 V (AC-1) or switching of control signals. Further features are the noiseless and hum-free coil and a switch position indication.



### Categories

Products » Low Voltage Products and Systems » Control Products » Contactors » Mini Contactors

### + Accessories

### Ordering

Minimum Order Quantity: 1 piece

Customs Tariff Number: 85365080

### Popular Downloads

Data Sheet, Technical Information: [1SBC100173C0201](#)

Dimension Diagram: [GJL1200438F0001](#)

### Dimensions

Product Net Width: 47.5 mm

Product Net Height:	45.5 mm
Product Net Depth:	51.5 mm
Product Net Weight:	0.17 kg

## Technical

Number of Poles:	4
Mini Contactor Type:	Mini Contactor
Rated Operational Voltage:	Auxiliary Circuit 12 ... 240 V DC Auxiliary Circuit 12 ... 500 V AC/DC Main Circuit 12 ... 690 V AC/DC Main Circuit 690 V AC
Rated Frequency (f):	Control Circuit DC Main Circuit 60 Hz Main Circuit 50 Hz Main Circuit DC
Rated Impulse Withstand Voltage (U <sub>imp</sub> ):	Auxiliary Circuit 6 kV Main Circuit 6 kV
Rated Insulation Voltage (U <sub>i</sub> ):	690 V acc. to UL/CSA 600 V
Number of Main Contacts NC:	0
Number of Main Contacts NO:	3
Rated Operational Current AC-1 (I <sub>e</sub> ):	(220 / 240 V) 40 °C 12 A (220 / 240 V) 55 °C 12 A (380 / 440 V) 40 °C 12 A (380 / 440 V) 55 °C 12 A (690 V) 40 °C 6 A (690 V) 55 °C 6 A
Rated Operational Power AC-3 (P <sub>e</sub> ):	(220 / 230 / 240 V) 2.2 kW (400 V) 4 kW (400 V) Three Phase 4 kW (440 V) 4 kW (500 V) 4 kW (690 V) 3 kW
Rated Short-time Withstand Current (I <sub>cw</sub> ):	at 40 °C Ambient Temp, in Free Air, from a Cold State 10 s 64 A
Number of Auxiliary Contacts NC:	1
Number of Auxiliary Contacts NO:	0
Rated Operational Current AC-15 (I <sub>e</sub> ):	(120 V) 4 A (220 / 240 V) 4 A (24 V) 4 A (380 / 400 V) 3 A (500 V) 2 A
Rated Operational Current DC-13 (I <sub>e</sub> ):	(110 V) 0.7 A (220 / 240 V) 0.4 A (24 V) 2.5 A
Conventional Free-air Thermal Current (I <sub>th</sub> ):	Main Circuit 12 A
Rated Control Circuit Voltage (U <sub>c</sub> ):	24 V DC
Coil Operating Limits:	(acc. to IEC 60947-4-1) for DC supply 0.85 ... 1.1 x U <sub>c</sub> (at θ ≤ 55 °C)
Degree of Protection:	Auxiliary Circuit Terminals IP20 Control Circuit Terminals IP20 Main Circuit Terminals IP20
Mechanical Durability:	10000000 cycle
Minimum Switching Capacity:	17 V 5 mA

<b>Maximum Electrical Switching Frequency:</b>	AC-1 300 cycles per hour AC-15 600 cycles per hour AC-3 600 cycles per hour DC-1 600 cycles per hour DC-13 600 cycles per hour DC-3 600 cycles per hour
--	--

<b>Mounting on DIN Rail:</b>	TH35-7.5 (35 x 7.5 mm Mounting Rail) acc. to IEC 60715 TH35-15 (35 x 15 mm Mounting Rail) acc. to IEC 60715
------------------------------	--

<b>Power Loss:</b>	at Rated Operating Conditions per Pole 2 W
--------------------	--

<b>Standards:</b>	IEC/EN 60947-1 IEC/EN 60947-4-1 IEC/EN 60947-5-1 UL 60947-1 UL 60947-4-1
-------------------	--

## Environmental

<b>Ambient Air Temperature:</b>	Operation -25 ... +55 °C Storage -40 ... +80 °C
---------------------------------	--

<b>Maximum Operating Altitude Permissible:</b>	2000 m
--	--------

<b>Resistance to Shock acc. to IEC 60068-2-27:</b>	11 ms Pulse 15g
--	-----------------

<b>Resistance to Vibrations acc. to IEC 60068-2-6:</b>	5g / 5 ... 150 Hz
--	-------------------

<b>RoHS Status:</b>	Following EU Directive 2011/65/EC
---------------------	-----------------------------------

## Technical UL/CSA

<b>Maximum Operating Voltage UL/CSA:</b>	Main Circuit 600 V AC Auxiliary Circuit 600 V AC/DC
--	--

<b>Full Load Amps Motor Use:</b>	(240 V AC) Single Phase 4.9 A (440 ... 480 V AC) Three Phase 4.8 A
----------------------------------	---

<b>Horsepower Rating UL/CSA:</b>	(208 V AC) Three Phase 1 Hp (220 ... 240 V AC) Single Phase 0.5 Hp (220 ... 240 V AC) Three Phase 2 Hp (440 ... 480 V AC) Three Phase 3 Hp (550 ... 600 V AC) Three Phase 1 Hp
----------------------------------	--

<b>General Use Rating UL/CSA:</b>	(300 V AC) 8 A
-----------------------------------	----------------

## Certificates and Declarations (Document Number)

<b>BV Certificate:</b>	<a href="#">1SAA920000-0204</a>
------------------------	---------------------------------

<b>CB Certificate:</b>	<a href="#">1SAA938000-2002</a>
------------------------	---------------------------------

<b>CCC Certificate:</b>	<a href="#">1SAA938001-3804</a>
-------------------------	---------------------------------

<b>cUL Certificate:</b>	<a href="#">cUL E191658</a>
-------------------------	-----------------------------

<b>Declaration of Conformity - CE:</b>	<a href="#">1SAD938512-0001</a>
--	---------------------------------

<b>DNV Certificate:</b>	<a href="#">1SAA938000-0305</a>
-------------------------	---------------------------------

<b>EAC Certificate:</b>	<a href="#">1SAA920000-2702</a>
-------------------------	---------------------------------

<b>GL Certificate:</b>	<a href="#">1SAA938000-0403</a>
------------------------	---------------------------------

<b>Instructions and Manuals:</b>	<a href="#">2CDC102047M6801</a>
----------------------------------	---------------------------------

<b>KC Certificate:</b>	<a href="#">1SAA938000-1501</a>
------------------------	---------------------------------

<b>LR Certificate:</b>	<a href="#">1SAA938000-0503</a>
------------------------	---------------------------------

<b>RMRS Certificate:</b>	<a href="#">1SAA938000-0704</a>
--------------------------	---------------------------------

<b>RoHS Information:</b>	<a href="#">1SAD938512-0001</a>
--------------------------	---------------------------------

## Container Information

Package Level 1 Units: 10 piece

Package Level 1 Width: 108 mm

Package Level 1 Height: 69 mm

Package Level 1 Length: 247 mm

Package Level 1 Gross Weight: 1.775 kg

Package Level 1 EAN: 4013614415029

## Classifications

Object Classification Code: Q

ETIM 4: EC000066 - Magnet contactor, AC-switching

ETIM 5: EC000066 - Magnet contactor, AC-switching


ETIM 6: EC000066 - Power contactor, AC switching

eClass: 7.0 27371003

UNSPSC: 39121529

## Contact information

What would you like to do?

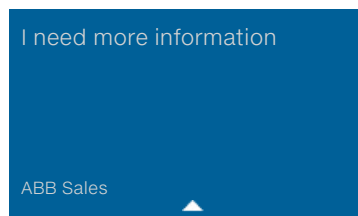

### Submit your inquiry

#### Country

United States of America ▼

#### Name

#### Company

#### E-Mail

#### Phone

#### Zip code

#### Your message

[→ Privacy policy](#)

Cancel

Send message

### Your local ABB Sales Team

#### Name

Customer Support

▲ Close