


# Bussmann CC12H Series

## High I<sup>2</sup>t Chip™ fuses

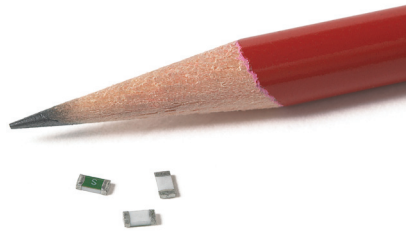

### Product description:

- Halogen free, lead free, RoHS compliant
- High I<sup>2</sup>t 1206 footprint surface mount fuse
- High inrush withstand capability
- Excellent temperature and cycling characteristics
- RoHS compliant, and lead free and halogen free construction
- Compatible with solder reflow and wave solder

### Applications

- Flat panel displays and televisions
- Automotive infotainment and ECU
- Computer servers
- Portable electronics
- Mobile device chargers

### Agency information

- cURus Recognition File number: E19180, Guide JDYX2/JDYX8
- AEC-Q200 Automotive Grade Certified

### Ordering

- 3000 fuses on 8mm tape-and-reel on a 7 inch (178mm) reel per EIA Standard 481. Specify Catalog Symbol and package code suffix "-TR" (e.g., CC12H1A-TR)

**Bussmann**  
by **EAT•N**



The Bussmann brand of circuit protection products (formerly of the Bussmann Division of Cooper Industries) is now part of Eaton's Electrical Group, Electronics Division.

**Bussmann is now part of Eaton**  
**Same great products plus even more.**

### Electrical characteristics

Amp Rating	% of Amp Rating	Opening Time
750mA-20A	100%	4 Hours, min
1-3A	200%	1-60 Seconds
1-5A	250%	5 Seconds, max
1-5A	300%	0.1-3 Seconds
750mA, 6-20A	350%	5 Seconds, max
750mA-20A	1000%	0.2-20mS

### Specifications

Catalog Symbol	Current Rating (amps)	Voltage Rating (Vdc)	Interrupting Rating* (amps)	Resistance (Ω)** Typical	Typical Melt (I <sup>2</sup> t)† DC	Typical Voltage Drop (mV)‡	Alpha Marking
CC12H750mA	0.75	63	50	0.780	0.15	840	E
CC12H1A	1	63	50	0.470	0.18	490	H
CC12H1.5A	1.5	63	50	0.218	0.4	355	K
CC12H2A	2	63	50	0.133	1.1	305	N
CC12H2.5A	2.5	63	50	0.079	1.7	240	O
CC12H3A	3	63	50	0.049	2.2	185	P
CC12H3.5A	3.5	63	50	0.037	2.7	180	R
CC12H4A	4	63	50	0.033	3.2	169	S
CC12H4.5A	4.5	32	100	0.028	4.2	160	X
CC12H5A	5	32	100	0.023	6.0	140	T
CC12H6A	6	32	100	0.0155	8.0	140	F
CC12H7A	7	32	100	0.011	9.0	120	J
CC12H8A	8	32	100	0.007	12.0	80	M
CC12H10A	10	32	100	0.0065	33	90	U
CC12H12A	12	32	100	0.0045	45	80	W
CC12H15A	15	32	100	0.0030	40	70	Y
CC12H20A	20	32	100	0.0020	50	60	Q

\* DC Interrupting Rating (Measured at rated voltage, time constant of less than 50 microseconds, battery source)

\*\* DC Cold Resistance (Measured at 10% of rated current)


† Typical Melting I<sup>2</sup>t (Measured with a battery bank at rated DC voltage, 10x-rated current, not to exceed interrupting rating, time constant of calibrated circuit less than 50 microseconds)

‡ Typical Voltage Drop (Measured at rated current after temperature stabilizes)


Device designed to carry rated current for four hours minimum. An operating current of 80% or less of rated current is recommended, with further derating required at elevated ambient temperatures.

### Dimensions - mm (in)

Drawing not to scale.

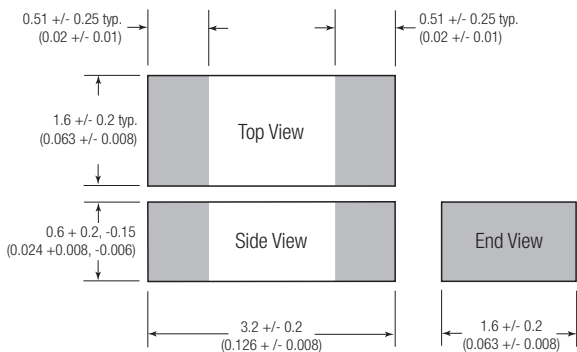

### Pad layout




### Environmental data

- Thermal Shock: MIL-STD-202, Method 107, Test Condition B
- Vibration: MIL-STD-202, Method 204, Test Condition C
- Moisture Resistance: MIL-STD-202, Method 106, 50 day cycle
- Solderability: ANSI/J-STD-002, Test B
- Normal ambient temperature: 23°C
- Operating temperature range -40°C to +125°C


### Soldering method

- Wave Solder Immersion: 260°C, 10 seconds maximum.
- Solder Reflow: 260°C, 30 seconds maximum.


Time-current curves — 750mA-5A average melt

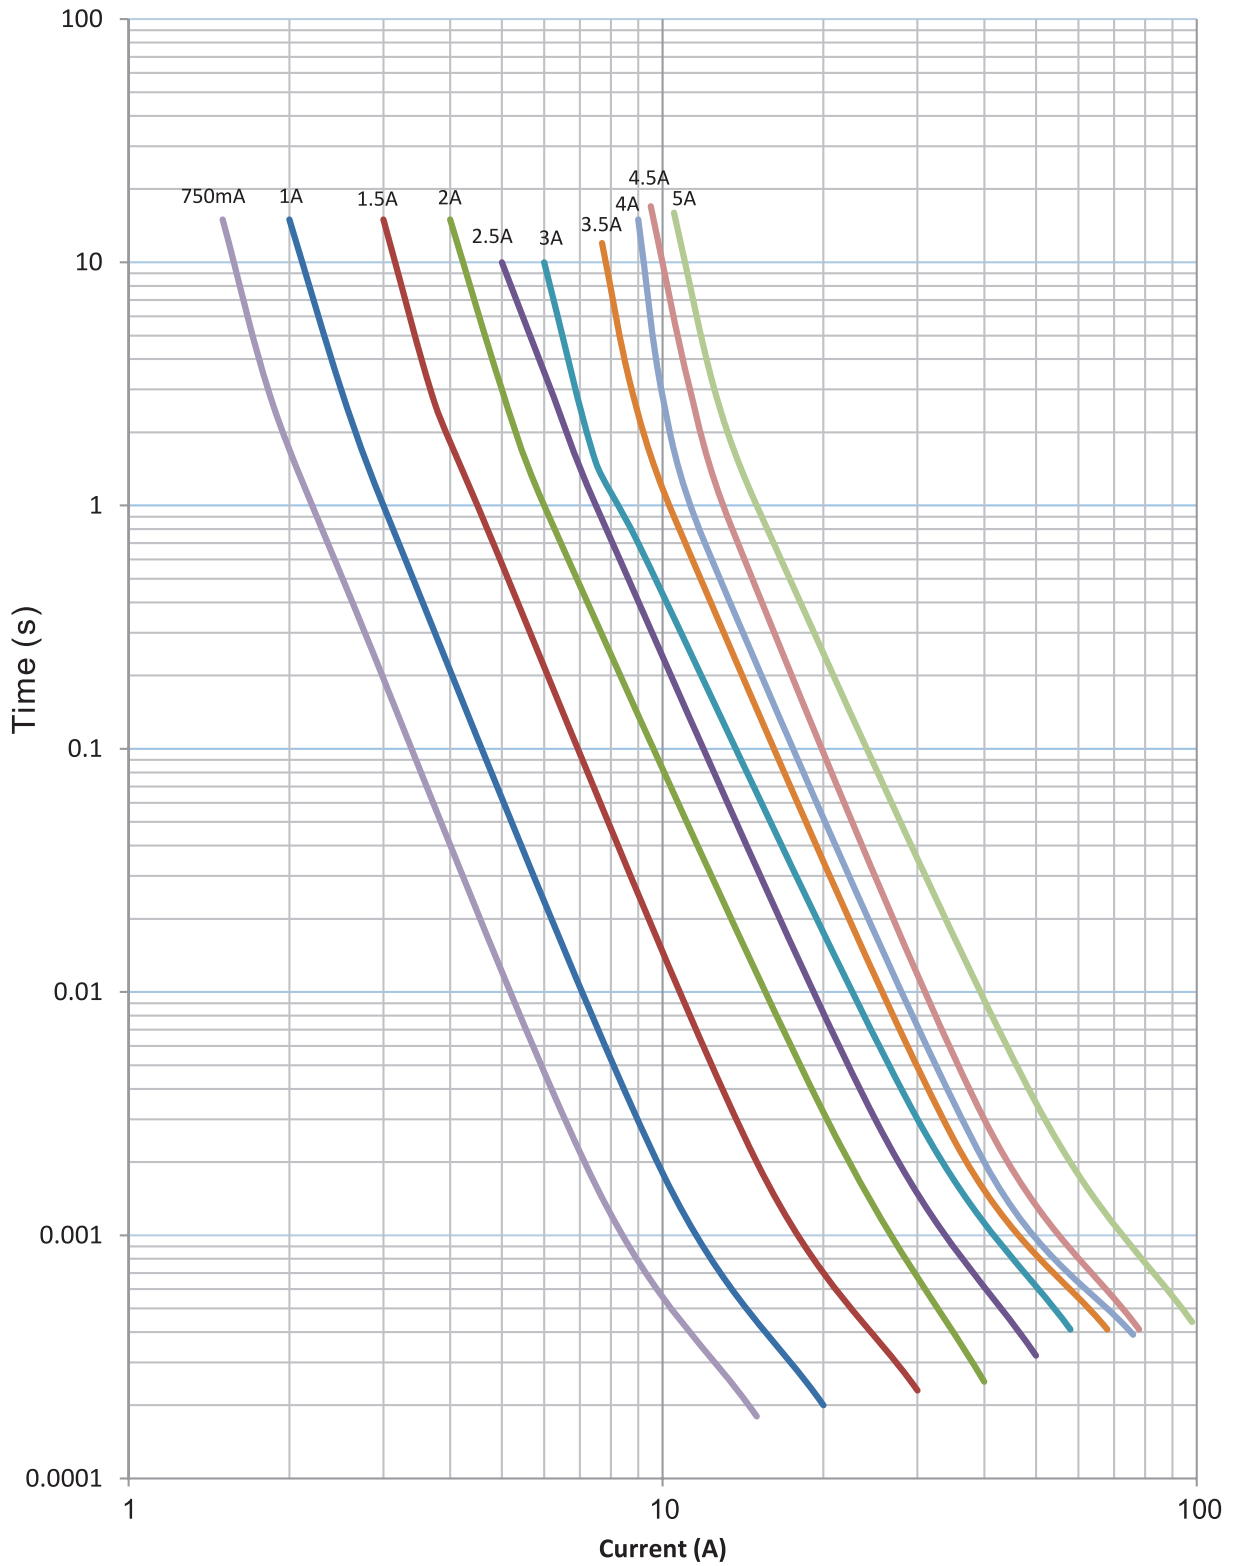


**Time-current curves — 6A-20A average melt**

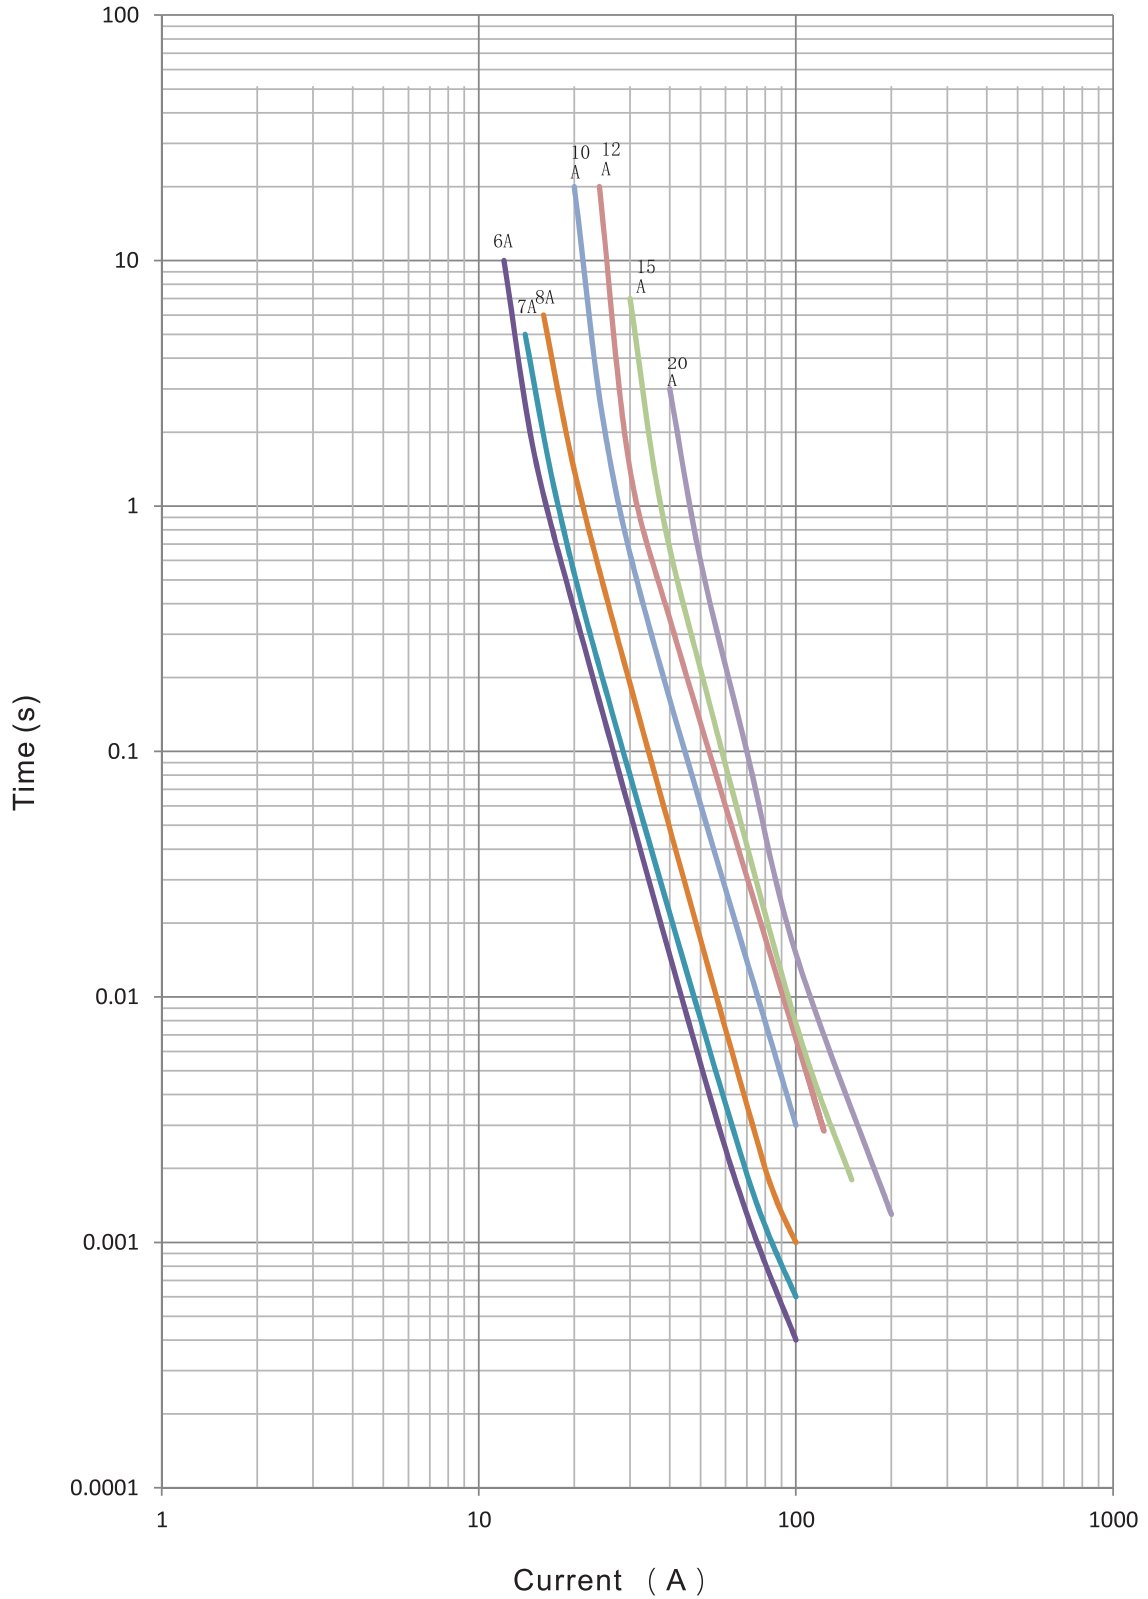


I<sup>2</sup>t vs. time curves — 750mA-5A

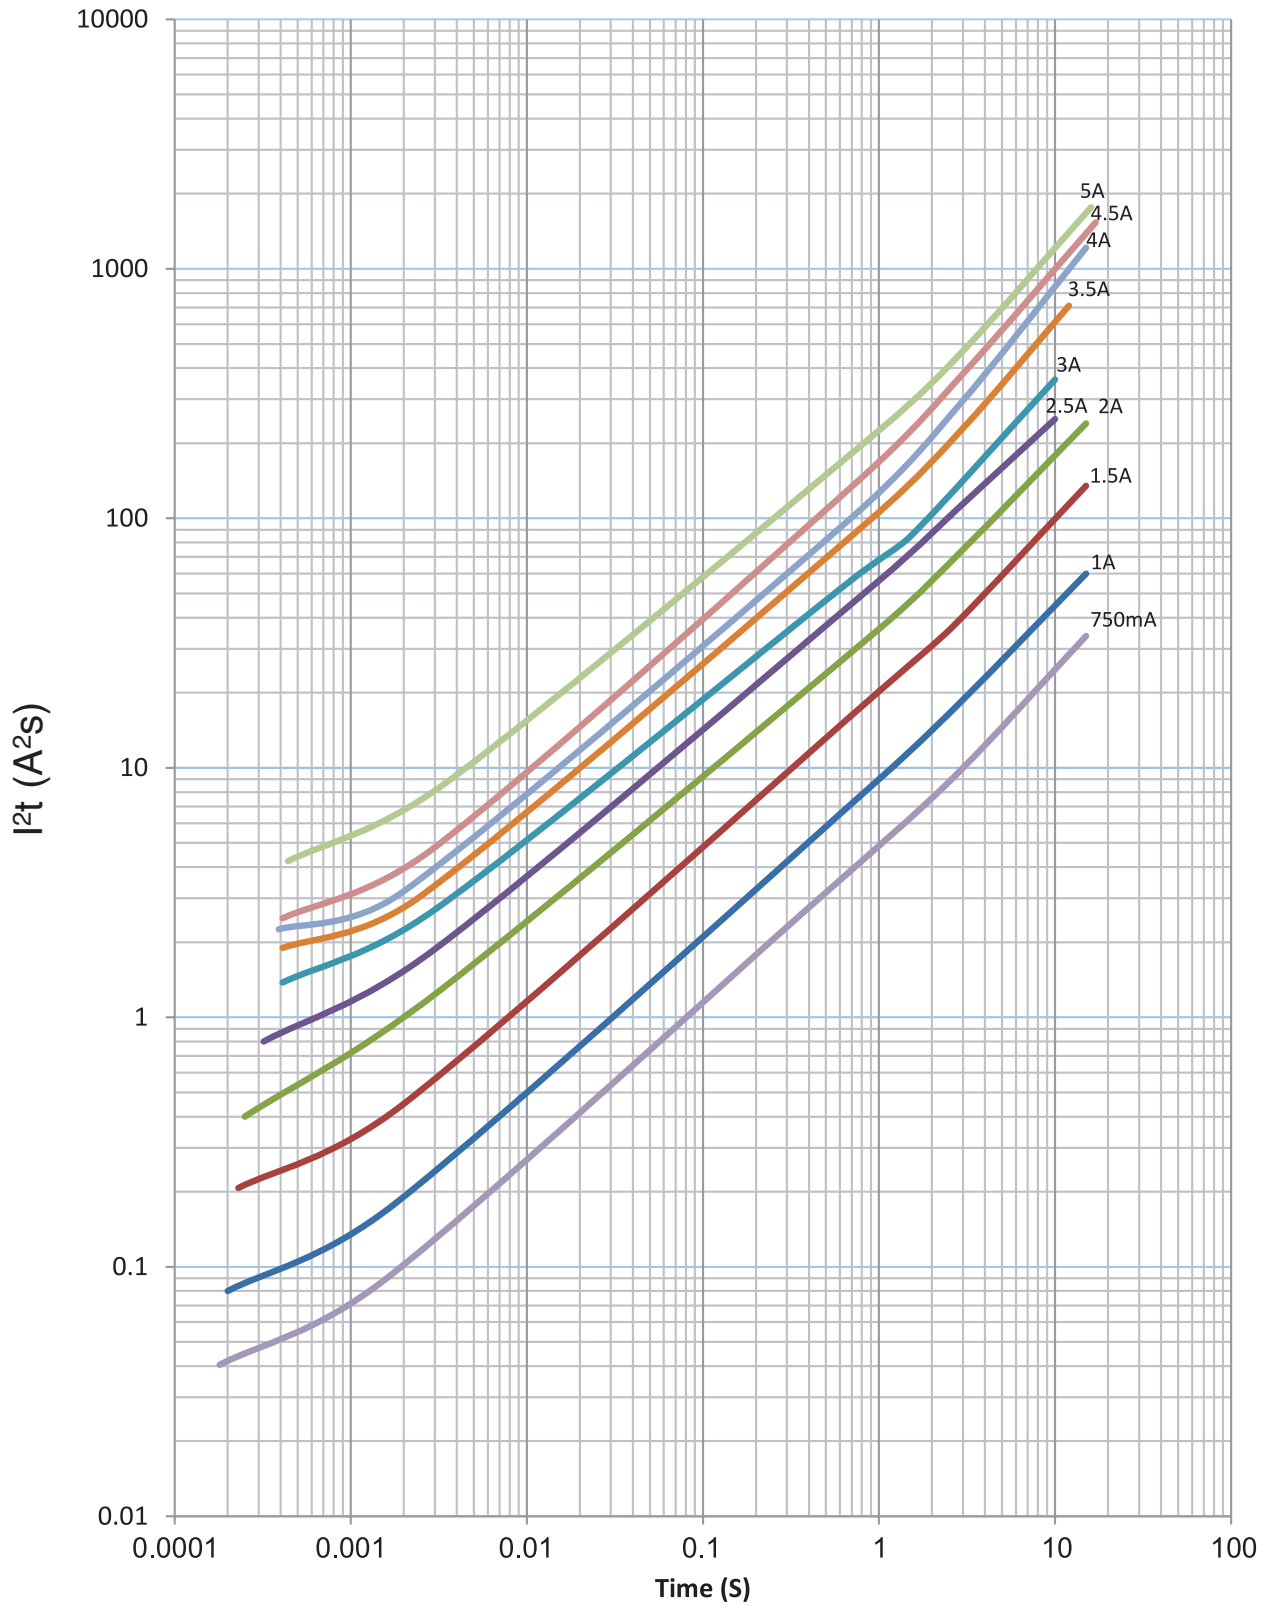


I<sup>2</sup>t vs. time curves — 6A-20A

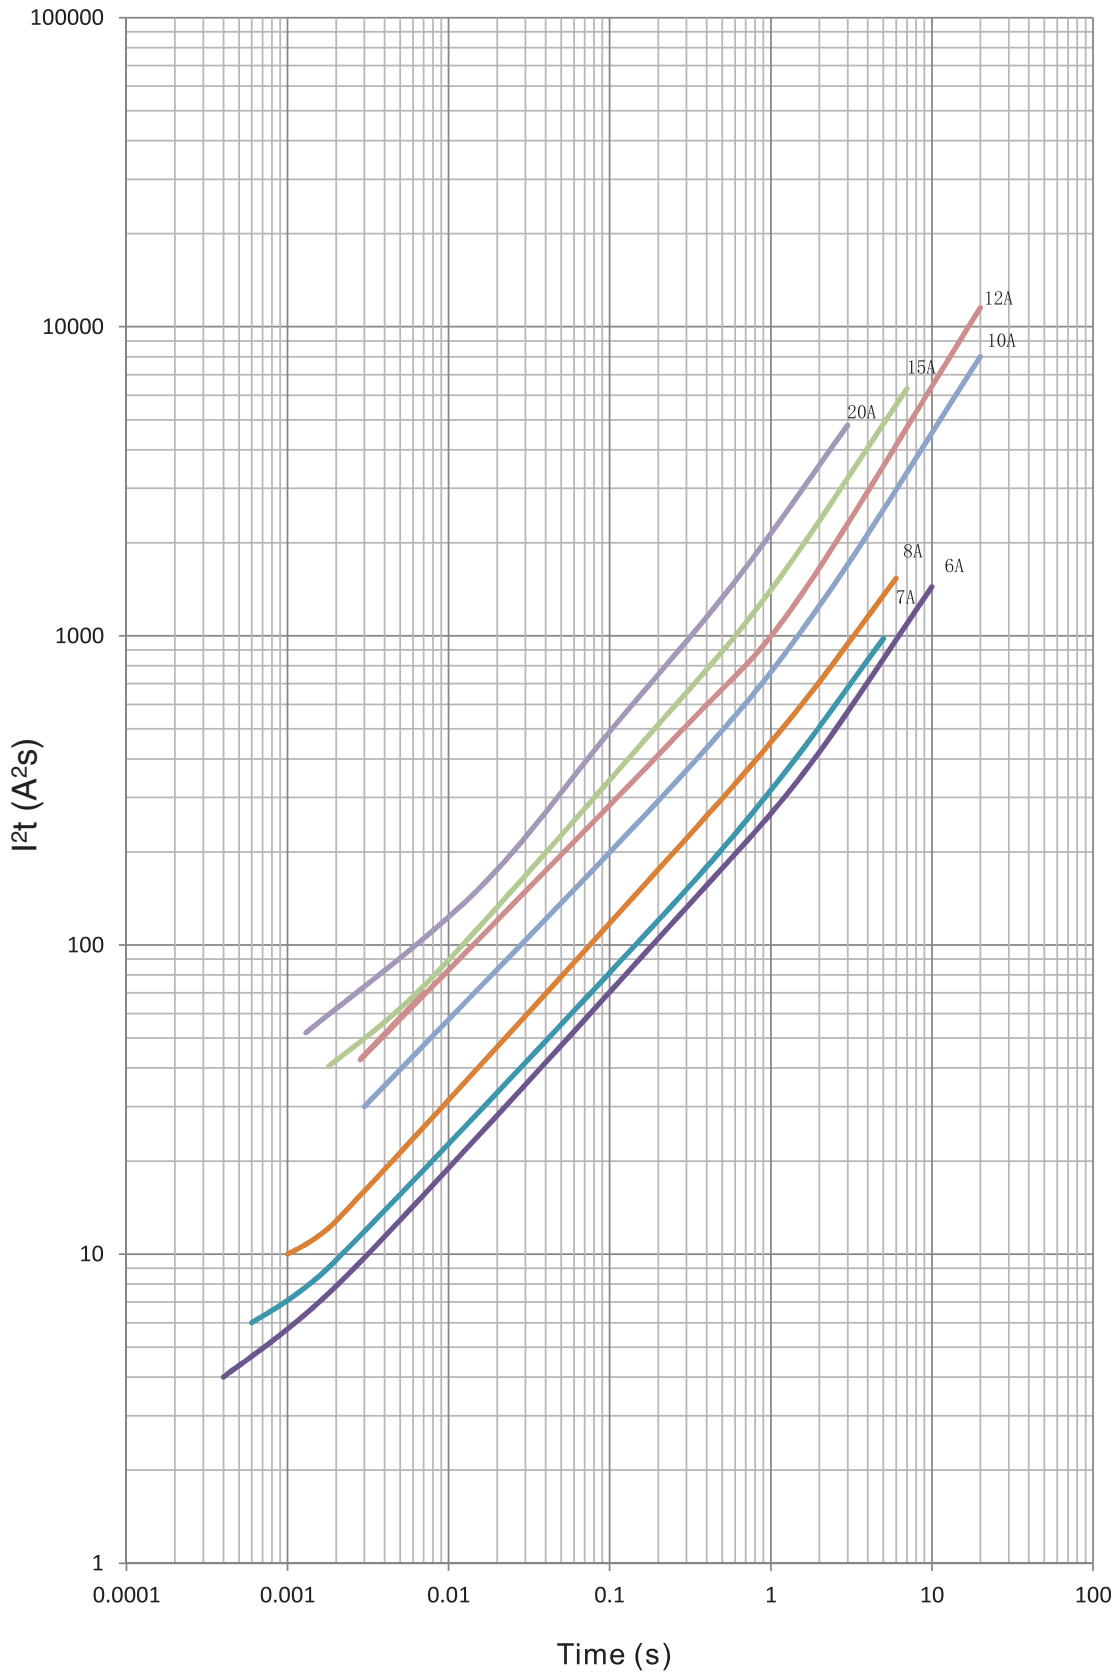

I<sup>2</sup>t vs. current curves — 750mA-5A

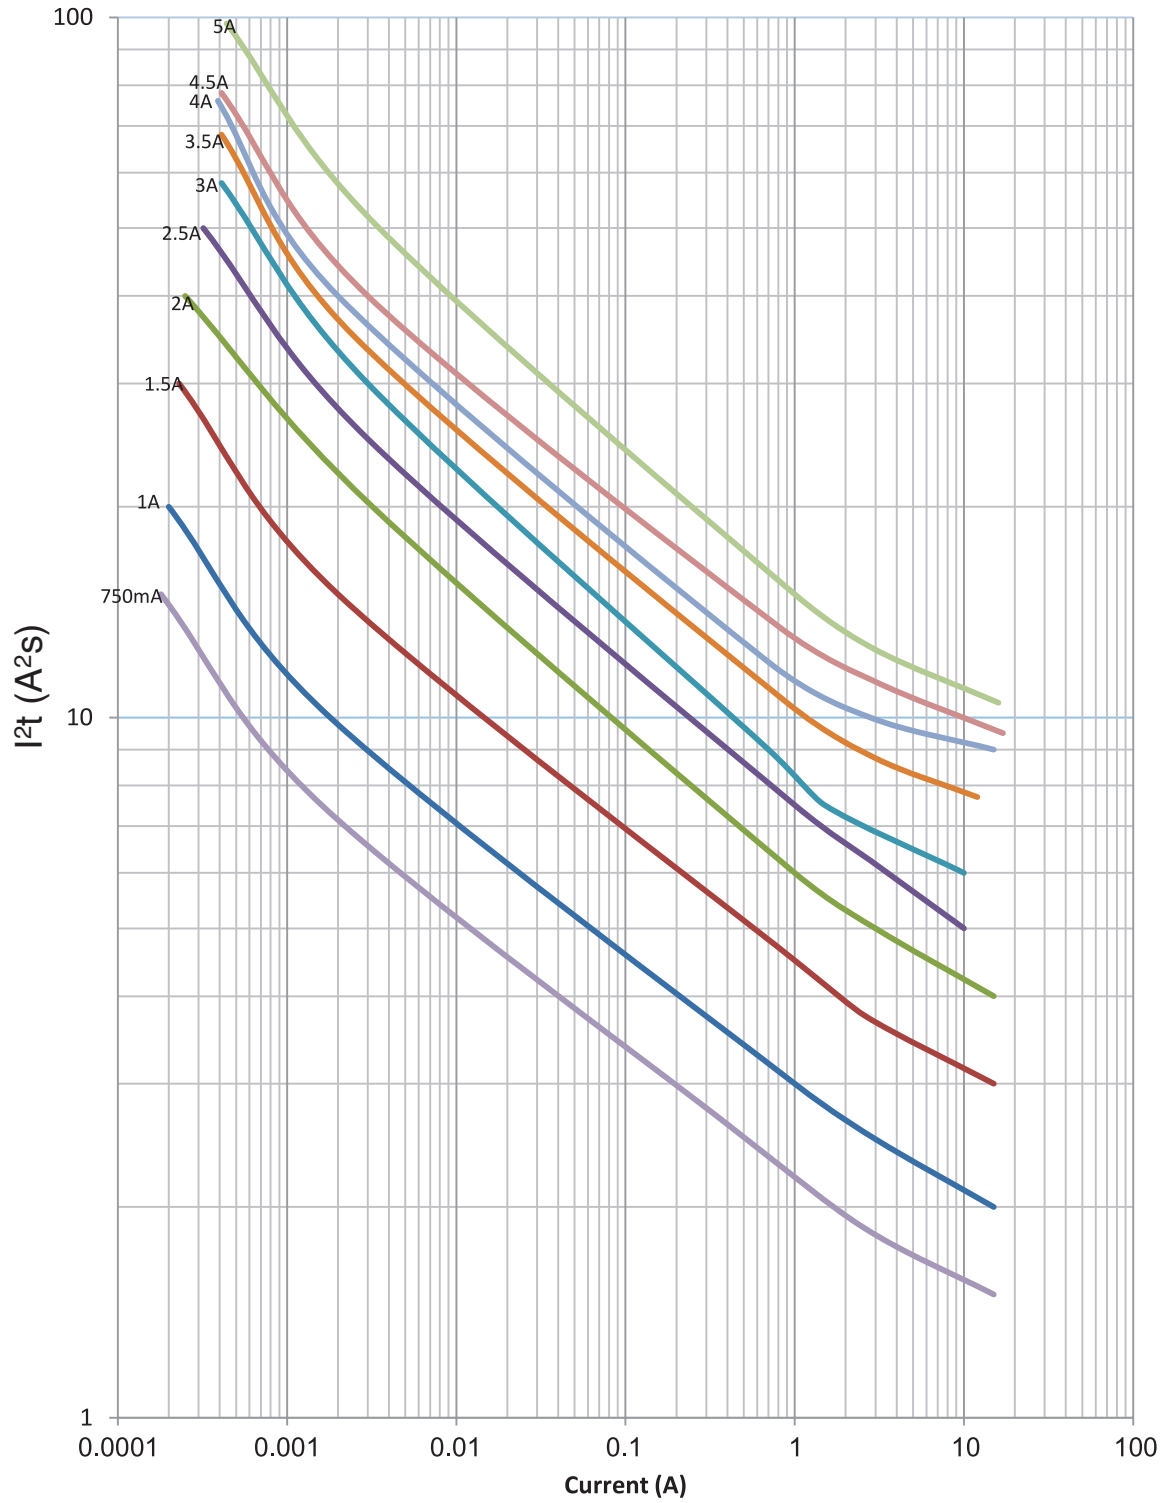


I<sup>2</sup>t vs. current curves — 6A-20A

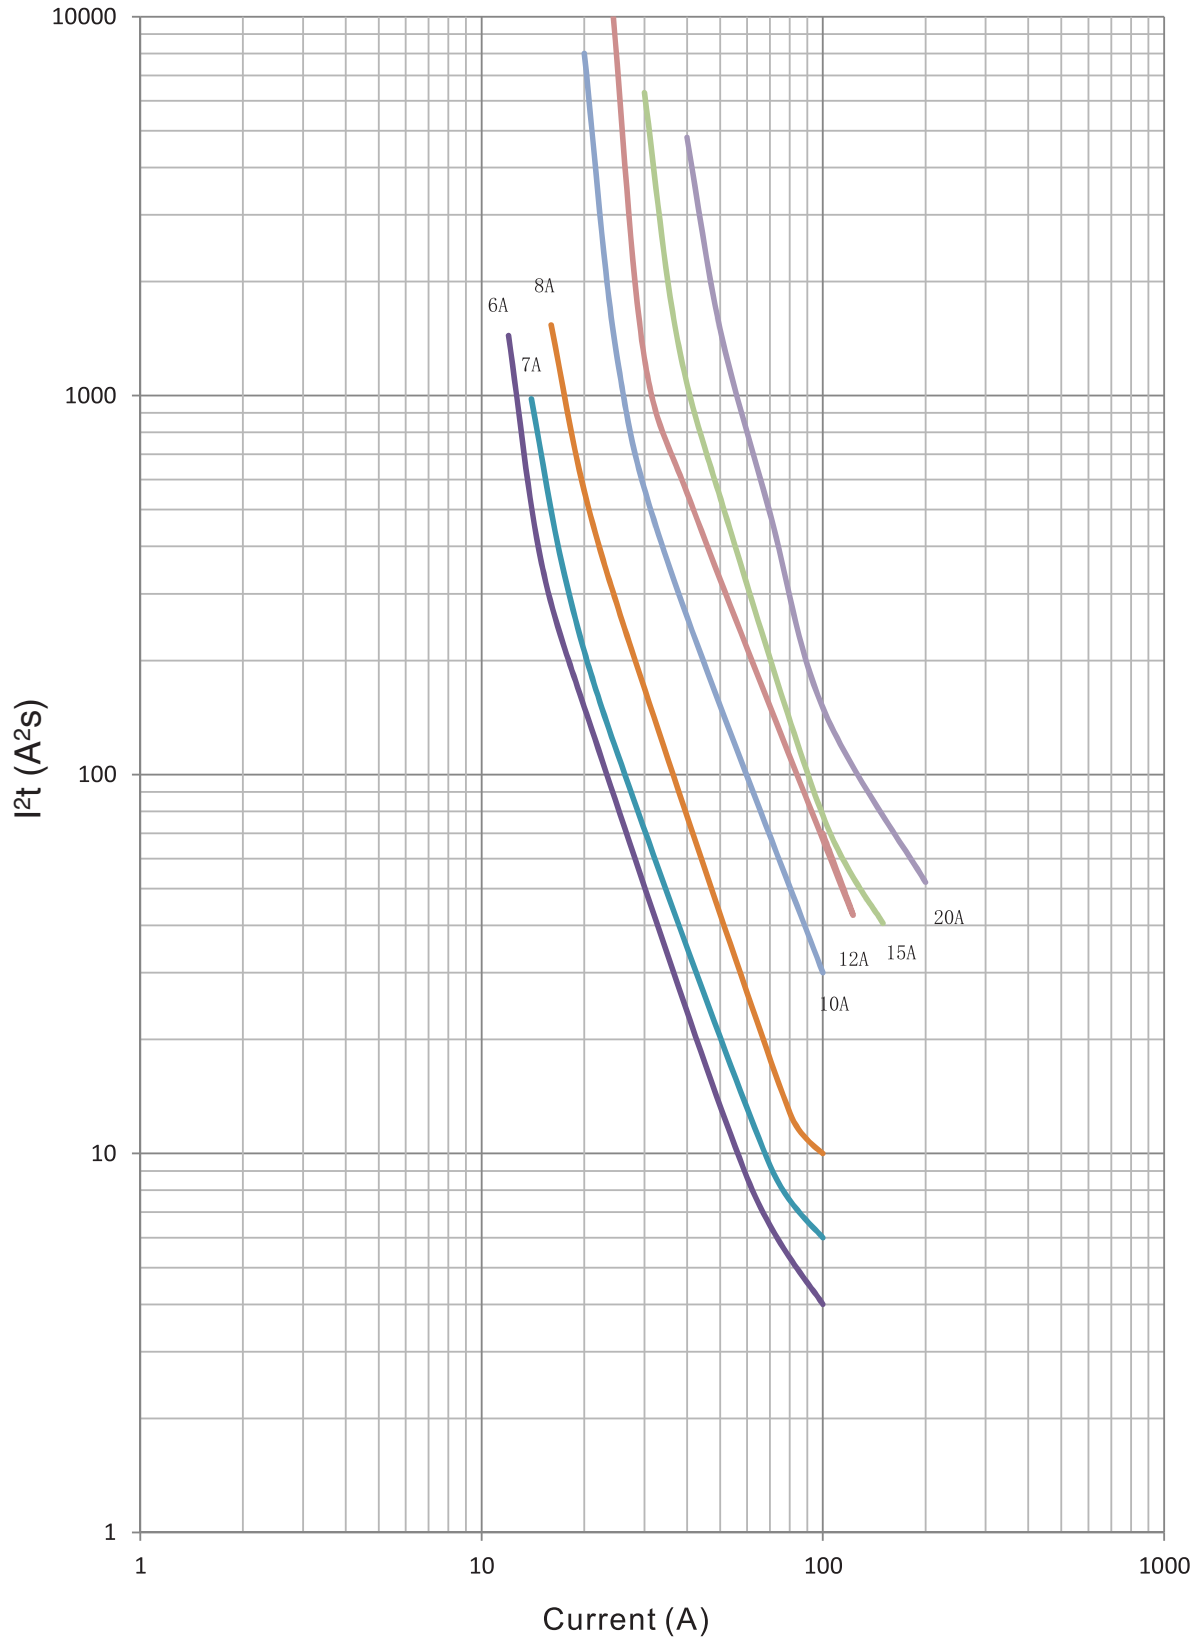



**Solder reflow profile**

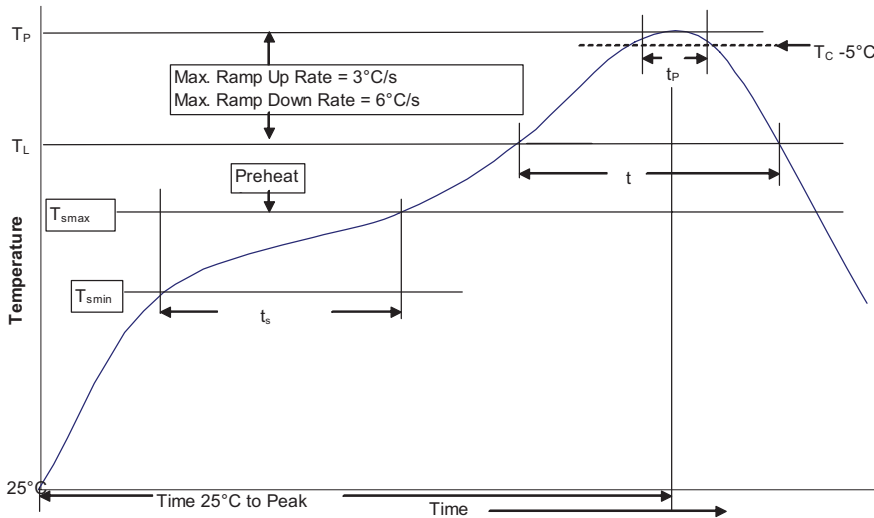

**Table 1 - Standard SnPb Solder (T<sub>c</sub>)**

Package Thickness	Volume <350 mm <sup>3</sup>	Volume ≥350 mm <sup>3</sup>
<2.5mm	235°C	220°C
≥2.5mm	220°C	220°C

**Table 2 - Lead (Pb) Free Solder (T<sub>c</sub>)**

Package Thickness	Volume <350 mm <sup>3</sup>	Volume 350 - 2000 mm <sup>3</sup>	Volume >2000 mm <sup>3</sup>
<1.6mm	260°C	260°C	260°C
1.6 – 2.5mm	260°C	250°C	245°C
>2.5mm	250°C	245°C	245°C

**Reference JDEC J-STD-020D**

Profile Feature	Standard SnPb Solder	Lead (Pb) Free Solder
Preheat and Soak	<ul style="list-style-type: none"> <li>Temperature min. (T<sub>smin</sub>)</li> <li>Temperature max. (T<sub>smax</sub>)</li> <li>Time (T<sub>smin</sub> to T<sub>smax</sub>) (t<sub>s</sub>)</li> </ul>	<ul style="list-style-type: none"> <li>150°C</li> <li>200°C</li> <li>60-120 Seconds</li> </ul>
Average ramp up rate T <sub>smax</sub> to T <sub>p</sub>	3°C/ Second Max.	3°C/ Second Max.
Liquidous temperature (T <sub>L</sub> )	183°C	217°C
Time at liquidous (t <sub>L</sub> )	60-150 Seconds	60-150 Seconds
Peak package body temperature (T <sub>p</sub> )*	Table 1	Table 2
Time (t <sub>p</sub> )** within 5 °C of the specified classification temperature (T <sub>c</sub> )	20 Seconds**	30 Seconds**
Average ramp-down rate (T <sub>p</sub> to T <sub>smax</sub> )	6°C/ Second Max.	6°C/ Second Max.
Time 25°C to Peak Temperature	6 Minutes Max.	8 Minutes Max.

\* Tolerance for peak profile temperature (T<sub>p</sub>) is defined as a supplier minimum and a user maximum.

\*\* Tolerance for time at peak profile temperature (t<sub>p</sub>) is defined as a supplier minimum and a user maximum.

**North America**

Eaton's Electrical Group  
Electronics Division  
1225 Broken Sound Parkway NW  
Suite F  
Boca Raton, FL 33487-3533  
Tel: 1-561-998-4100  
Fax: 1-561-241-6640  
Toll Free: 1-888-414-2645

Eaton's Electrical Group  
Electronics Division  
P.O. Box 14460  
St. Louis, MO 63178-4460  
Tel: 1-636-394-2877  
Fax: 1-636-527-1607

**Europe**

Eaton's Electrical Group  
Electronics Division  
Burton-on-the-Wolds  
Leicestershire, LE 12 5th UK  
Phone: +44 (0) 1509 882 600  
Fax: +44 (0) 1509 882 786

Eaton's Electrical Group  
Electronics Division  
Avda Santa Eulalia, 290  
Terrassa, Barcelona 08223 Spain  
Phone: +34-93-736-2813  
Fax: +34-93-783-5055

**Asia Pacific**

Eaton's Electrical Group  
Electronics Division  
No.2, #06-01  
Serangoon North Avenue 5  
Singapore 554911  
Tel: +65 6645 9888  
Fax: +65 6728 3155

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Life Support Policy: Bussmann does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

**Eaton's Electrical Group  
Electronics Division**  
114 Old State Road  
Ellisville, MO 63021  
United States  
www.eaton.com/elx

© 2014 Eaton  
All Rights Reserved  
Publication No. 4309 — BU-SB14479  
July 2014

Eaton is a registered trademark.

All other trademarks are property of their respective owners.