


SSB6FF060409 Product Details

Have a Question?

Chat with a Product Information Specialist

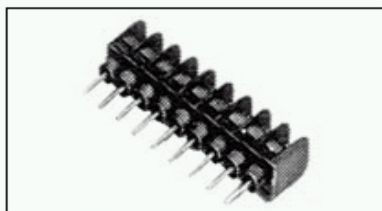

SSB6FF060409

TE Internal Number: 5-1437412-4

 **Superseded**

[Search for Replacement Parts](#)

Barrier Strips

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

Product Highlights:

- Barrier Strip
- Barrier Style = Single Row, Dual Barrier
- Block Style = Flat
- 9.53 mm Centerline
- Vertical Mount Angle

[View all Features](#)

Quick Links

- ▶ [Check Pricing & Availability](#)
- ▶ [Search for Tooling](#)
- ▶ [Product Feature Selector](#)
- ▶ [Contact Us About This Product](#)

 [Add to My Part List](#)  [Request Sample](#)  [Find Similar Products](#)  [Buy Product](#)

Documentation & Additional Information

Product Drawings:

- None Available

Catalog Pages/Data Sheets:

- None Available

Product Specifications:

- None Available

Application Specifications:

- None Available

Instruction Sheets:

- None Available

CAD Files:

- None Available

Additional Information:

- [Product Line Information](#)

Related Products:

- [Tooling](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- [Product Type](#) = Barrier Strip
- [Mount Angle](#) = Vertical
- Screw Material = Brass
- Mounting Ears = With
- Comment = Do not order Screw and Captive Clamp in combination with other top hardware.; Other options available upon request, consult our Product Information Center.

Mechanical Attachment:

- Screw Plating = Nickel
- Mounting Style = Open End Position

Electrical Characteristics:

- [Top Hardware](#) = Wire Clamp Combo Head
- Number of Levels = Single
- Mounting Insert = Without

Body Related Features:

- [Barrier Style](#) = Single Row, Dual Barrier
- [Block Style](#) = Flat
- [Centerline \(in \[mm\]\)](#) = 0.375 [9.53]
- Number of Positions = 6
- [Terminal Style](#) = Extended Printed Circuit Pin 11.94 [.470]

Contact Related Features:

- Mounting Options = None

Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C
- RoHS/ELV Compliance History = Always was RoHS compliant

Other:

- Brand = Buchanan

 [BOOKMARK](#)   

Corporate Information

[Who We Are](#)
[Investors](#)
[News Room](#)
[Supplier Portal](#)
[Careers](#)


Quick Links

[Check Distributor Inventory](#)
[Cross Reference](#)
[Find Documents & Drawings](#)
[Product Compliance Support Center](#)
[Site Map](#)

Customer Support

[Email or Chat with Us](#)
[Find a Phone Number](#)
[Search Knowledge Base](#)
[Manage Your Account](#)

Sign up for our eNewsletter

Enter your email address 

Follow Us On:



Visit Us On:

