


# PHE840MB5470MB04R17

aka F840BD473M275A

Capacitor, film, 0.047 uF, 20% Tol, 760V@85C, Lead Spacing=15mm

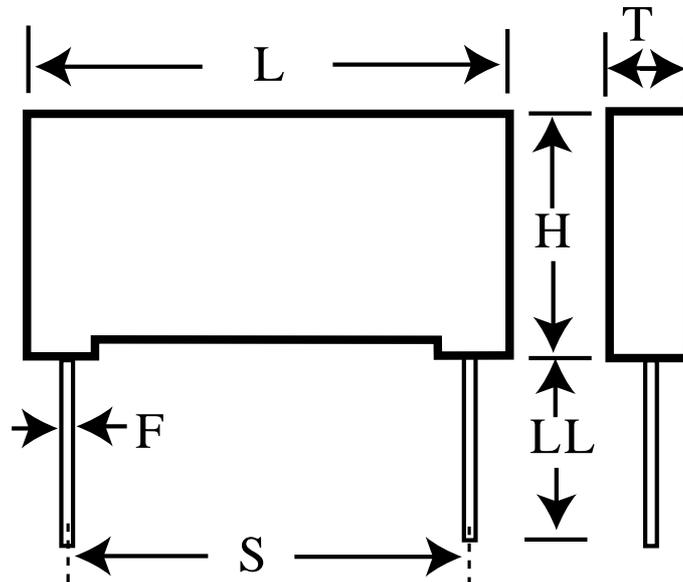

## Dimensions (mm)

## Specifications

ID	Dimension	Tolerance	Manufacturer:	KEMET
L	18	max	Brand:	Rifa
H	10.5	max	Application:	Safety:X
T	5.5	max	Sub Application:	EMI Suppression
S	15	+/-0.4	Capacitance:	0.047 uF
LL	17	nom	Tolerance:	20%
F	0.8	nom	Temperature Range:	-55/+105C
			Climate Category:	55/105/56/B
			Voltage DC @ 85C:	760V
			Voltage DC @ 100C:	760V
			Voltage DC @ 105C:	760V
			Voltage AC:	275VAC
			Voltage AC Temperature:	105C
			Approval UL:	Yes
			Approval ENEC:	Yes
			Approval CUL:	Yes
			Approval CSA:	No
			Dielectric:	Metallized Polyester
			Construction:	Non Inductive
			Dissipation Factor @ 1 KHz:	0.1%
			Dissipation Factor @ 10 KHz:	0.2%
			Dissipation Factor @ 100KHz:	0.6%
			Insulation Resistance:	30 GOhm
			Maximum dVdT:	100v/s
			Body Type:	Radial Box
			Package Kind:	Bulk
			Package Quantity:	800
			Miscellaneous Electrical:	UL/CSA VAC= 280; fo= &DD2&"MHz