


**Product Details for 131 -0138 -0002**

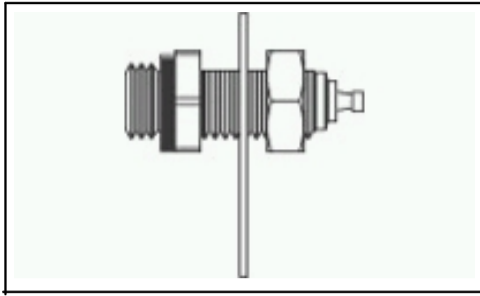

**131 -0138 -0002**

Tyco Part Number: 1466325 -1

[Active](#)

**SMB RF Connectors**

[RoHS Compliant \(Statement of Compliance\)](#)

**Product Highlights:**

- ? Connector
- ? Jack
- ? Miniature
- ? Terminate To Coaxial Cable
- ? Coupler Style = Threaded

[View all Features](#)

**Quick Links**

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

**Documentation & Additional Information**

**Product Drawings:**

- ? [131 -0138 -000X= RECEPTACLE, BULKHEAD, GOLDEN CRIMP, 5...](#)  
(TIF, English)

**Catalog Pages/Data Sheets:**

- ? None Available

**Product Specifications:**

- ? None Available

**Application Specifications:**

- ? None Available

**Instruction Sheets:**

- ? None Available

**CAD Files:**

- ? None Available

**Additional Information:**

- ? [Product Line Information](#)

**Related Products:**

- ? [Tooling](#)

[List all Documents](#)

**Product Features** (Please use the Product Drawing for all design activity)

**Product Type Features:**

- ? [Product Type](#) = Connector
- ? [Gender](#) = Jack
- ? Connector Series = Miniature
- ? [Body Style](#) = Straight
- ? [Grade](#) = Commercial
- ? Safety Wire Holes = Without
- ? Thread Size = 4.83 [.190] -32 UNF -2A
- ? Panel Thickness (mm [in]) = 4.06 [0.160]
- ? Body Material = Brass
- ? Dielectric Material = TEFLON

**Mechanical Attachment:**

- ? [Panel Attachment](#) = With
- ? [Panel Attachment Style](#) = Front Mount
- ? Panel Attachment Method = Jam Nut

**Electrical Characteristics:**

- ? [Connector Impedance \(?\)](#) = 50
- ? Environmental Seal = Without
- ? Solderless = No

**Termination Related Features:**

- ? [Coaxial Cable Termination Type](#) = Solder

**Body Related Features:**

- ? Coupler Style = Threaded
- ? [Pin Protection](#) = Without
- ? Solder Lug = With
- ? [Body Plating](#) = Gold per MIL -G-45204, Type II, Grade C, Class 1
- ? Terminal Style = Turret Pin

**Contact Related Features:**

- ? [Center Contact Plating](#) = Gold per MIL -G-45204, Type II, Grade C, Class 1
- ? Contacts = With

**Industry Standards:**

- ? [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- ? [Lead Free Solder Processes](#) = Wave solder capable to 240°C, Wave solder capable to 260°C, Wave solder capable to 265°C, Reflow solder capable to 245°C, Reflow solder capable to 260°C, Pin in-Paste capable to 245°C, Pin in-Paste capable to 260°C
- ? RoHS/ELV Compliance History = Always was RoHS compliant

**Conditions for Usage:**

- ? [Terminate To](#) = Coaxial Cable

**Other:**

- ? Brand = Microdot